

Emergency Generator Set Engineering Submittals

**(1) Caterpillar Model C32 (D1000GC)
Diesel Engine Driven Generator Set
Standby Rated 1000kW For:**

- ☐ Approved, release order for production
- ☐ Approved as noted, release order for production
- ☐ Not approved, make changes and resubmit

COMMENTS

PLEASE SIGN AND DATE FOR APPROVAL

Signature _____ Date _____

Generator Specification Sheet
Performance Data
Generator Data
Automatic Voltage Regulator
Frame

Section 2

GCCP 1.2 Control
Remote Annunciator
Input Expansion Module
Output Expansion Module

Section 3

Sound Attenuated Enclosure
100 Amp Load Center
Fuel Tank
7 Gall Fuel Spill Containment

Section 4

Open Unit Drawing
Packaged Unit Drawings
Wiring Diagrams

Section 5

Circuit Breaker
Battery
Battery Charger
Jacket Water Heater
Coolant
Ground Fault Relay
Starting Motor
Remote E-Stop Button
20A GFCI Receptacles

Section 6
Generator Warranty Statement

Generator Information

Cat® D1000 GC

Diesel Generator Sets



Image shown might not reflect actual configuration

Engine	C32
Bore – mm (in)	145 (5.7)
Stroke – mm (in)	162 (6.4)
Displacement – L (in ³)	32.1 (1959)
Compression Ratio	15.0:1
Aspiration	TA
Fuel System	EUI
Governor Type	ADEM™ A4

Model	Standby 60 Hz kW (kVA)	Emissions Performance
D1000 GC	1000 (1250)	U.S EPA Emergency Stationary Use only (Tier 2)

Standard Features

Cat® Diesel Engine

- Meets U.S. EPA Emergency Stationary Use only (Tier 2) emission standards
- Reliable performance proven in thousands of applications worldwide

Generator Set Package

- Meets NFPA 110 start time & block load requirements
- Conforms to ISO 8528-5 G3 load acceptance requirements
- Reliability is verified through prototype testing, which includes torsional vibration, fuel consumption, oil consumption, transient performance, and endurance testing

Alternators

- Superior motor starting capability minimizes the need for oversizing the generator
- Designed to match the performance and output characteristics of Cat diesel engines

Cooling System

- Cooling systems available to operate in ambient temperatures 50° C @ 0m
- Tested to ensure proper generator set cooling

GCCP Control Panels

- User-friendly set-up and button layout for ease of use
- Multiple parameters are monitored & displayed simultaneously for full visibility
- The module can be configured to suit a wide range of applications for user flexibility

Warranty and Extended Service Coverage (ESC)

- 24 months/1000-hour warranty for standby ratings
- 5 yrs Gold Complimentary Extended Service Coverage

Worldwide Product Support

- Cat dealers have over 1,800 dealer branch stores operating in 200 countries
- Your local Cat dealer provides extensive post-sale support, including maintenance and repair agreements

Financing

- Caterpillar offers an array of financial products to help you succeed through financial service excellence
- Options include loans, finance lease, operating lease, working capital, and revolving line of credit
- Contact your local Cat dealer for availability in your region

Standard and Optional Equipment

Engine

Air Cleaner

- ☒ Single element
- ☐ Dual element

Starting

- ☐ Standard batteries
- ☐ Oversized batteries
- ☐ Dual Electric Starters
- ☒ Jacket water heater

Engine Attachments

- ☐ 6" Exhaust Flexible Fittings
- ☐ 6" Exhaust Flange Kits
- ☐ Radiator Duct Flange

Alternator

Output voltage

- ☒ 480V
- ☐ 600V

Temperature Rise (over 40°C ambient)

- ☒ 125°C
- ☐ 105°C

Winding type

- ☐ Random wound

Excitation

- ☐ Internal excitation (IE)
- ☒ Permanent magnet (PM)

Attachments

- ☐ Anti-condensation heater

Power Termination

Type

- ☒ Circuit breaker (Primary)
- ☐ 1200A ☒ 1600A ☐ 2000A
- ☐ Circuit breaker (Auxiliary)
- ☐ 250A ☐ 400A
- ☐ 3-pole
- ☐ Manually operated

Trip Unit

- ☐ LSI ☒ LSIG ☐ LSIG-P

Factory Enclosure

- ☒ Sound attenuated
- ☐ Weatherproof

Attachments

- ☐ DC lighting package

Fuel Tank

- ☐ Integrated 2100 gal (7950 L)
- ☐ Sub base 3000 gal (11356 L)
- ☐ Sub base 4200 gal (15876 L)

Control System

Controller

- ☒ GCCP 1.2

Attachments

- ☐ Remote annunciator module
- ☐ Expansion I/O module
- ☒ 100A Load Center
- ☒ 20A GFCI AC Receptacle
- ☒ Ground Fault Indication
- ☐ Audible Alarm

Charging

- ☒ Battery charger – 10A (Installed)
- ☐ Battery charger – 20A
(Shipped loose)

Cat Connect

Connectivity

- ☐ Ethernet
- ☐ Cellular

Extended Service Options

Terms

- ☐ 3 year
- ☐ 4 year
- ☒ 5 year

Coverage

- ☐ Silver
- ☒ Gold

Certifications

- ☒ UL 2200 Listed
- ☐ cUL CSA 22.2 No. 100-14
- ☐ IBC seismic certification

Note: Some options may not be available on all models. Certifications may not be available with all model configurations. Consult factory for availability.

D1000 GC Diesel Generator Sets

Electric Power



Package Performance – D1000 GC




Performance	Standby	
Frequency	60 Hz	
Gen set power rating with fan	1000 ekW	
Gen set power rating with fan @ 0.8 power factor	1250 kVA	
Fueling strategy	EPA ESE (Tier 2)	
Performance number	DM9933	
Fuel Consumption		
100% load with fan – L/hr (gal/hr)	272.1	(71.9)
75% load with fan – L/hr (gal/hr)	213.4	(56.4)
50% load with fan – L/hr (gal/hr)	144.7	(38.2)
25% load with fan – L/hr (gal/hr)	82.6	(21.8)
Cooling System		
Radiator air flow restriction (system) – kPa (in. water)	0.12	(0.48)
Radiator air flow – m³/min (cfm)	943	(33301)
Engine coolant capacity – L (gal)	55	(14.5)
Radiator coolant capacity – L (gal)	49	(12.9)
Total coolant capacity – L (gal)	104	(27.5)
Inlet Air		
Combustion air inlet flow rate – m³/min (cfm)	87.6	(3094.1)
Exhaust System		
Exhaust stack gas temperature – °C (°F)	476.4	(889.5)
Exhaust gas flow rate – m³/min (cfm)	228.4	(8065.3)
Exhaust system backpressure (maximum allowable) – kPa (in. water)	6.7	(27.0)
Heat Rejection		
Heat rejection to jacket water – kW (Btu/min)	352	(20033)
Heat rejection to exhaust (total) – kW (Btu/min)	1024	(58206)
Heat rejection to aftercooler – kW (Btu/min)	288	(16385)
Heat rejection to atmosphere from engine – kW (Btu/min)	127	(7238)
Heat rejection from alternator – kW (Btu/min)	55	(3131)
Emissions* (Nominal)		
NOx mg/Nm³ (g/hp-h)	2348.6	(4.93)
CO mg/Nm³ (g/hp-h)	62.1	(0.13)
HC mg/Nm³ (g/hp-h)	5.5	(0.01)
PM mg/Nm³ (g/hp-h)	7.2	(0.02)
Emissions* (Potential Site Variation)		
NOx mg/Nm³ (g/hp-h)	2841.6	(5.97)
CO mg/Nm³ (g/hp-h)	116.1	(0.24)
HC mg/Nm³ (g/hp-h)	10.3	(0.03)
PM mg/Nm³ (g/hp-h)	14.1	(0.04)

*mg/Nm³ levels are corrected to 5% O₂. Contact your local Cat dealer for further information.



Weights and Dimensions

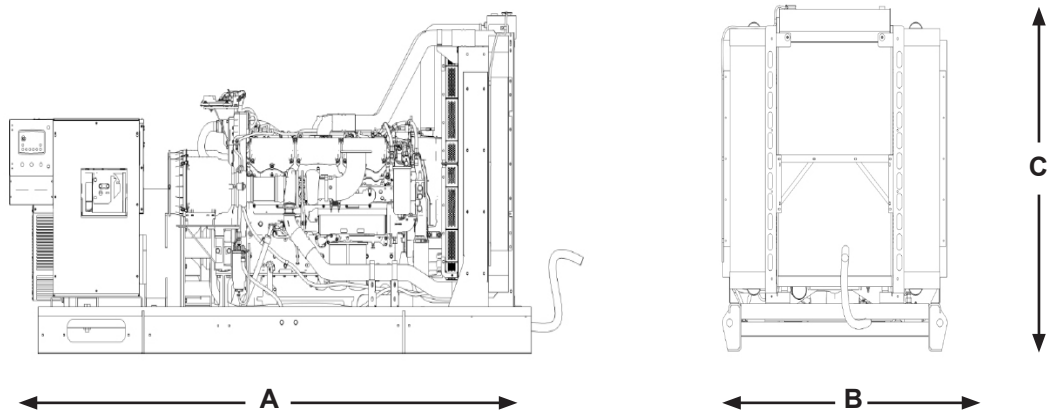

Model	Dim "A" mm (in)	Dim "B" mm (in)	Dim "C" mm (in)	Dry Weight kg (lb)
D1000 GC	4175 (164.3)	1856 (73.1)	2217.5 (87.3)	6654 (14669)

Note: For reference only. Do not use for installation design. Contact your local Cat dealer for precise weights and dimensions.

Ratings and Definitions

Standby

Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

Applicable Codes and Standards

CSA C22.2 No. 100-14, UL 142, UL 489, UL 869A, UL 2200, IBC 2018, ISO 3046, ISO 8528 and facilitates compliance to NFPA37, NFPA70, NFPA99 and NFPA110 codes

Note: Codes may not be available in all model configurations. Please consult your local Cat dealer for availability.

Fuel Rates

Fuel rates are based on fuel oil of 35° API [16°C (60°F)] gravity having an LHV of 42,780 kJ/kg (18,390 Btu/lb) when used at 29°C (85°F) and weighing 838.9 g/liter (7.001 lbs/U.S. gal.).

LET'S DO THE WORK.™

Performance Number: DM9933

Change Level: 05

SALES MODEL:	C32	COMBUSTION:	DIRECT INJECTION
BRAND:	CAT	ENGINE SPEED (RPM):	1,800
MACHINE SALES MODEL:		HERTZ:	60
ENGINE POWER (BHP):	1,483	FAN POWER (HP):	56.3
GEN POWER WITH FAN (EKW):	1,000.0	ASPIRATION:	TA
COMPRESSION RATIO:	15.0	AFTERCOOLER TYPE:	ATAAC
RATING LEVEL:	STANDBY	AFTERCOOLER CIRCUIT TYPE:	JW+OC, ATAAC
PUMP QUANTITY:	1	INLET MANIFOLD AIR TEMP (F):	120
FUEL TYPE:	DIESEL	JACKET WATER TEMP (F):	210.2
MANIFOLD TYPE:	DRY	TURBO CONFIGURATION:	PARALLEL
GOVERNOR TYPE:	ADEM4	TURBO QUANTITY:	2
ELECTRONICS TYPE:	ADEM4	TURBOCHARGER MODEL:	GTB45518BS-52T-1.37
IGNITION TYPE:	CI	CERTIFICATION YEAR:	2007
INJECTOR TYPE:	EUI	PISTON SPD @ RATED ENG SPD (FT/MIN):	1,913.4
REF EXH STACK DIAMETER (IN):	8		
MAX OPERATING ALTITUDE (FT):	997		

INDUSTRY	SubIndustry	APPLICATION
ELECTRIC POWER	STANDARD	PACKAGED GENSET
OIL AND GAS	LAND PRODUCTION	PACKAGED GENSET

General Performance Data

GENSET POWER WITH FAN	PERCENT LOAD	ENGINE POWER	BRAKE MEAN EFF PRES (BMEP)	BRAKE SPEC FUEL CONSUMPTN (BSFC)	ISO BRAKE SPEC FUEL CONSUMPTN (BSFC)	VOL FUEL CONSUMPTN (VFC)	ISO VOL FUEL CONSUMPTN (VFC)	ELEC SPEC FUEL CONSUMPTN (ESFC)	ISO ELEC SPEC FUEL CONSUMPTN (ESFC)
EKW	%	BHP	PSI	LB/BHP-HR	LB/BHP-HR	GAL/HR	GAL/HR	LB/EKW-HR	LB/EKW-HR
1,000.0	100	1,483	333	0.342	0.337	71.5	70.4	0.507	0.500
900.0	90	1,338	301	0.341	0.336	64.2	63.3	0.506	0.499
800.0	80	1,195	268	0.348	0.343	58.7	57.9	0.521	0.513
750.0	75	1,124	252	0.353	0.348	56.0	55.2	0.530	0.522
700.0	70	1,053	237	0.354	0.349	52.6	51.9	0.533	0.525
600.0	60	912	205	0.353	0.348	45.4	44.8	0.537	0.530
500.0	50	772	173	0.350	0.345	38.1	37.5	0.540	0.533
400.0	40	635	143	0.351	0.346	31.4	30.9	0.557	0.549
300.0	30	496	111	0.357	0.352	25.0	24.6	0.590	0.582
250.0	25	426	96	0.363	0.358	21.8	21.5	0.619	0.610

200.0	20	355	80	0.373	0.367	18.7	18.4	0.662	0.652
100.0	10	209	47	0.424	0.418	12.5	12.3	0.885	0.872

GENSET POWER WITH FAN	PERCENT LOAD	ENGINE POWER	INLET MFLD PRES	INLET MFLD TEMP	EXH MFLD TEMP	EXH MFLD PRES	ENGINE OUTLET TEMP	COMPRESSOR OUTLET PRES	COMPRESSOR OUTLET TEMP
EKW	%	BHP	IN-HG	DEG F	DEG F	IN-HG	DEG F	IN-HG	DEG F
1,000.0	100	1,483	70.8	118.8	1,214.1	58.6	892.5	76	424.5
900.0	90	1,338	64.3	111.4	1,153.5	52.2	856.8	70	392.7
800.0	80	1,195	60.6	106.7	1,117.9	48.8	833.4	66	375.9
750.0	75	1,124	58.4	104.2	1,102.3	47.0	822.2	63	366.1
700.0	70	1,053	54.2	100.0	1,080.1	43.6	811.1	59	345.5
600.0	60	912	44.3	90.6	1,028.7	35.7	789.8	49	304.7
500.0	50	772	33.5	81.3	968.0	27.4	769.5	37	264.3
400.0	40	635	24.3	74.9	899.7	20.8	733.5	27	224.9
300.0	30	496	16.1	70.5	816.3	15.3	679.6	19	185.5
250.0	25	426	12.3	69.0	768.2	12.9	646.0	15	165.6
200.0	20	355	8.9	67.9	713.3	10.7	605.3	11	147.2
100.0	10	209	4.5	67.5	572.6	7.8	491.3	6	123.0

GENSET POWER WITH FAN	PERCENT LOAD	ENGINE POWER	WET INLET AIR VOL FLOW RATE	ENGINE OUTLET WET EXH GAS VOL FLOW RATE	WET INLET AIR MASS FLOW RATE	WET EXH GAS MASS FLOW RATE	WET EXH VOL FLOW RATE (32 DEG F AND 29.98 IN HG)	DRY EXH VOL FLOW RATE (32 DEG F AND 29.98 IN HG)
EKW	%	BHP	CFM	CFM	LB/HR	LB/HR	FT3/MIN	FT3/MIN
1,000.0	100	1,483	3,105.2	8,115.3	13,517.7	14,024.8	2,950.9	2,698.6
900.0	90	1,338	2,944.7	7,443.4	12,775.8	13,231.6	2,780.0	2,550.6
800.0	80	1,195	2,860.8	7,069.3	12,380.1	12,796.7	2,687.9	2,475.7
750.0	75	1,124	2,799.4	6,858.4	12,094.1	12,491.0	2,630.6	2,427.3
700.0	70	1,053	2,654.6	6,439.5	11,425.3	11,795.7	2,491.4	2,301.6
600.0	60	912	2,369.9	5,618.4	10,126.3	10,445.3	2,210.8	2,046.3
500.0	50	772	2,090.3	4,815.2	8,871.8	9,141.4	1,926.2	1,786.0
400.0	40	635	1,819.3	4,039.9	7,654.2	7,876.2	1,664.7	1,547.4
300.0	30	496	1,549.9	3,272.7	6,487.7	6,664.2	1,412.4	1,317.4
250.0	25	426	1,414.6	2,888.8	5,920.9	6,075.3	1,284.6	1,200.7
200.0	20	355	1,292.4	2,528.2	5,413.4	5,545.9	1,167.2	1,094.3
100.0	10	209	1,149.4	1,989.9	4,805.1	4,893.7	1,028.8	975.8

Heat Rejection Data

GENSET POWER WITH FAN	PERCENT LOAD	ENGINE POWER	REJECTION TO JACKET WATER	REJECTION TO ATMOSPHERE	REJECTION TO EXH	EXHAUST RECOVERY TO 350F	FROM OIL COOLER	FROM AFTERCOOLER	WORK ENERGY	LOW HEAT VALUE ENERGY	HIGH HEAT VALUE ENERGY
EKW	%	BHP	BTU/MIN	BTU/MIN	BTU/MIN	BTU/MIN	BTU/MIN	BTU/MIN	BTU/MIN	BTU/MIN	BTU/MIN
1,000.0	100	1,483	20,153	7,292	58,664	32,275	8,277	16,551	62,887	155,406	165,547
900.0	90	1,338	18,470	6,522	52,678	28,324	7,440	14,394	56,743	139,692	148,807
800.0	80	1,195	16,970	5,949	49,043	26,036	6,799	13,345	50,677	127,654	135,984
750.0	75	1,124	16,223	6,124	47,027	24,781	6,486	12,683	47,666	121,777	129,723
700.0	70	1,053	15,326	6,876	43,772	22,824	6,093	11,231	44,653	114,394	121,858
600.0	60	912	13,529	6,786	37,588	19,231	5,263	8,681	38,675	98,811	105,259
500.0	50	772	11,822	5,357	31,812	16,013	4,411	6,504	32,735	82,825	88,230
400.0	40	635	10,869	4,421	25,935	12,562	3,637	4,598	26,908	68,277	72,732
300.0	30	496	9,934	3,738	20,129	9,084	2,892	2,986	21,049	54,294	57,837
250.0	25	426	9,352	3,463	17,322	7,412	2,525	2,290	18,081	47,414	50,508
200.0	20	355	8,620	3,178	14,651	5,809	2,162	1,718	15,065	40,584	43,232
100.0	10	209	6,683	2,334	9,950	2,795	1,444	1,067	8,853	27,118	28,888

Emissions Data

DIESEL

RATED SPEED NOMINAL DATA: 1800 RPM

GENSET POWER WITH FAN		EKW	1,000.0	750.0	500.0	250.0	100.0
ENGINE POWER		BHP	1,483	1,124	772	426	209
PERCENT LOAD		%	100	75	50	25	10
TOTAL NOX (AS NO2)		G/HR	7,256	4,250	2,777	1,877	1,108
TOTAL CO		G/HR	192	123	265	435	672
TOTAL HC		G/HR	19	55	53	40	80
TOTAL CO2		KG/HR	726	568	384	219	125
PART MATTER		G/HR	26.9	19.9	34.3	53.7	43.0
TOTAL NOX (AS NO2)	(CORR 5% O2)	MG/NM3	2,346.5	1,746.8	1,683.5	2,004.0	1,999.0
TOTAL CO	(CORR 5% O2)	MG/NM3	62.1	49.6	159.5	470.0	1,358.8
TOTAL HC	(CORR 5% O2)	MG/NM3	5.4	19.7	27.7	36.7	147.6
PART MATTER	(CORR 5% O2)	MG/NM3	7.3	6.9	17.8	53.8	69.4
TOTAL NOX (AS NO2)	(CORR 15% O2)	MG/NM3	870.7	648.2	624.7	743.6	741.8
TOTAL CO	(CORR 15% O2)	MG/NM3	23.1	18.4	59.2	174.4	504.2
TOTAL HC	(CORR 15% O2)	MG/NM3	2.0	7.3	10.3	13.6	54.8
PART MATTER	(CORR 15% O2)	MG/NM3	2.7	2.5	6.6	20.0	25.7
TOTAL NOX (AS NO2)	(CORR 5% O2)	PPM	1,143	851	820	976	974
TOTAL CO	(CORR 5% O2)	PPM	50	40	128	376	1,087
TOTAL HC	(CORR 5% O2)	PPM	10	37	52	68	275

TOTAL NOX (AS NO2)	(CORR 15% O2)	PPM	424	316	304	362	361
TOTAL CO	(CORR 15% O2)	PPM	18	15	47	140	403
TOTAL HC	(CORR 15% O2)	PPM	4	14	19	25	102
TOTAL NOX (AS NO2)		G/HP-HR	4.93	3.81	3.61	4.41	5.32
TOTAL CO		G/HP-HR	0.13	0.11	0.34	1.02	3.22
TOTAL HC		G/HP-HR	0.01	0.05	0.07	0.09	0.38
PART MATTER		G/HP-HR	0.02	0.02	0.04	0.13	0.21
TOTAL NOX (AS NO2)		G/KW-HR	6.61	5.10	4.84	5.92	7.13
TOTAL CO		G/KW-HR	0.18	0.15	0.46	1.37	4.32
TOTAL HC		G/KW-HR	0.02	0.07	0.09	0.13	0.51
PART MATTER		G/KW-HR	0.02	0.02	0.06	0.17	0.28
TOTAL NOX (AS NO2)		LB/HR	16.00	9.37	6.12	4.14	2.44
TOTAL CO		LB/HR	0.42	0.27	0.58	0.96	1.48
TOTAL HC		LB/HR	0.04	0.12	0.12	0.09	0.18
TOTAL CO2		LB/HR	1,600	1,252	847	484	275
PART MATTER		LB/HR	0.06	0.04	0.08	0.12	0.09
OXYGEN IN EXH		%	10.0	11.4	12.2	13.4	15.7
DRY SMOKE OPACITY		%	0.5	0.4	1.3	3.1	2.3
BOSCH SMOKE NUMBER			0.67	0.66	0.83	1.15	1.01

RATED SPEED POTENTIAL SITE VARIATION: 1800 RPM

GENSET POWER WITH FAN		EKW	1,000.0	750.0	500.0	250.0	100.0
ENGINE POWER		BHP	1,483	1,124	772	426	209
PERCENT LOAD		%	100	75	50	25	10
TOTAL NOX (AS NO2)		G/HR	8,780	5,143	3,360	2,272	1,341
TOTAL CO		G/HR	359	231	495	813	1,256
TOTAL HC		G/HR	36	104	100	76	151
PART MATTER		G/HR	52.5	38.7	66.9	104.7	83.8
TOTAL NOX (AS NO2)	(CORR 5% O2)	MG/NM3	2,839.3	2,113.6	2,037.0	2,424.8	2,418.8
TOTAL CO	(CORR 5% O2)	MG/NM3	116.2	92.7	298.2	879.0	2,541.0
TOTAL HC	(CORR 5% O2)	MG/NM3	10.2	37.3	52.3	69.3	278.9
PART MATTER	(CORR 5% O2)	MG/NM3	14.2	13.4	34.8	104.9	135.3
TOTAL NOX (AS NO2)	(CORR 15% O2)	MG/NM3	1,053.6	784.3	755.9	899.8	897.6
TOTAL CO	(CORR 15% O2)	MG/NM3	43.1	34.4	110.6	326.2	942.9
TOTAL HC	(CORR 15% O2)	MG/NM3	3.8	13.8	19.4	25.7	103.5

PART MATTER	(CORR 15% O2)	MG/NM3	5.3	5.0	12.9	38.9	50.2
TOTAL NOX (AS NO2)	(CORR 5% O2)	PPM	1,383	1,030	992	1,181	1,178
TOTAL CO	(CORR 5% O2)	PPM	93	74	239	703	2,033
TOTAL HC	(CORR 5% O2)	PPM	19	70	98	129	521
TOTAL NOX (AS NO2)	(CORR 15% O2)	PPM	513	382	368	438	437
TOTAL CO	(CORR 15% O2)	PPM	34	28	89	261	754
TOTAL HC	(CORR 15% O2)	PPM	7	26	36	48	193
TOTAL NOX (AS NO2)		G/HP-HR	5.97	4.60	4.37	5.34	6.43
TOTAL CO		G/HP-HR	0.24	0.21	0.64	1.91	6.03
TOTAL HC		G/HP-HR	0.02	0.09	0.13	0.18	0.73
PART MATTER		G/HP-HR	0.04	0.03	0.09	0.25	0.40
TOTAL NOX (AS NO2)		G/KW-HR	8.00	6.18	5.86	7.16	8.62
TOTAL CO		G/KW-HR	0.33	0.28	0.86	2.56	8.08
TOTAL HC		G/KW-HR	0.03	0.12	0.17	0.24	0.97
PART MATTER		G/KW-HR	0.05	0.05	0.12	0.33	0.54
TOTAL NOX (AS NO2)		LB/HR	19.36	11.34	7.41	5.01	2.96
TOTAL CO		LB/HR	0.79	0.51	1.09	1.79	2.77
TOTAL HC		LB/HR	0.08	0.23	0.22	0.17	0.33
PART MATTER		LB/HR	0.12	0.09	0.15	0.23	0.18

Regulatory Information

EPA TIER 22006 - 2010				
GASEOUS EMISSIONS DATA MEASUREMENTS PROVIDED TO THE EPA ARE CONSISTENT WITH THOSE DESCRIBED IN EPA40 CFR PART 89 SUBPART D AND ISO 8178 FOR MEASURING HC, CO, PM, AND NOX. THE "MAX LIMITS" SHOWN BELOW AREWEIGHTED CYCLE AVERAGES AND ARE IN COMPLIANCE WITH THE NON-ROAD REGULATIONS.				
Locality	Agency	Regulation	Tier/Stage	Max Limits - G/BKW - HR
U.S. (INCL CALIF)	EPA	NON-ROAD	TIER 2	CO: 3.5 NOx + HC: 6.4 PM: 0.20

EPA EMERGENCY STATIONARY2011 - ----				
GASEOUS EMISSIONS DATA MEASUREMENTS PROVIDED TO THE EPA ARE CONSISTENT WITH THOSE DESCRIBED IN EPA 40 CFR PART 60 SUBPART IIII AND ISO 8178 FOR MEASURING HC, CO, PM, AND NOX. THE "MAX LIMITS" SHOWN BELOW ARE WEIGHTED CYCLE AVERAGES AND ARE IN COMPLIANCE WITH THE EMERGENCY STATIONARY REGULATIONS.				
Locality	Agency	Regulation	Tier/Stage	Max Limits - G/BKW - HR
U.S. (INCL CALIF)	EPA	STATIONARY	EMERGENCY STATIONARY	CO: 3.5 NOx + HC: 6.4 PM: 0.20

Altitude Derate Data

STANDARD

AMBIENT OPERATING TEMP (F)	30	40	50	60	70	80	90	100	110	120	130	140	NORMAL
ALTITUDE (FT)													
0	1,483	1,483	1,483	1,483	1,483	1,483	1,483	1,477	1,451	1,426	1,402	1,378	1,483
1,000	1,483	1,483	1,483	1,483	1,483	1,475	1,448	1,422	1,397	1,373	1,350	1,327	1,466
2,000	1,483	1,483	1,483	1,474	1,446	1,419	1,394	1,369	1,345	1,321	1,299	1,277	1,420
3,000	1,483	1,475	1,446	1,418	1,392	1,366	1,341	1,317	1,294	1,272	1,250	1,229	1,376
4,000	1,448	1,419	1,391	1,364	1,339	1,314	1,290	1,267	1,245	1,223	1,202	1,182	1,332
5,000	1,392	1,365	1,338	1,312	1,287	1,263	1,240	1,218	1,197	1,176	1,156	1,137	1,290
6,000	1,339	1,312	1,286	1,261	1,237	1,215	1,192	1,171	1,151	1,131	1,112	1,093	1,248
7,000	1,286	1,261	1,236	1,212	1,189	1,167	1,146	1,125	1,106	1,087	1,068	1,050	1,208
8,000	1,236	1,211	1,187	1,164	1,142	1,121	1,101	1,081	1,062	1,044	1,026	1,009	1,168
9,000	1,186	1,163	1,140	1,118	1,097	1,076	1,057	1,038	1,020	1,002	985	969	1,129
10,000	1,139	1,116	1,094	1,073	1,053	1,033	1,014	996	979	962	946	930	1,092
11,000	1,093	1,071	1,050	1,029	1,010	991	973	956	939	923	907	892	1,055
12,000	1,048	1,027	1,007	987	969	951	933	917	901	885	870	856	1,019
13,000	1,004	984	965	946	929	911	895	879	863	848	834	820	983
14,000	962	943	925	907	890	873	857	842	827	813	799	786	949
15,000	922	903	886	869	852	836	821	807	792	779	766	753	916

Cross Reference

Test Spec	Setting	Engine Arrangement	Engineering Model	Engineering Model Version	Start Effective Serial Number	End Effective Serial Number
6351442	NAP	30R0700	RE205	-	ZAG00001	
0K7838	GG0346	3208618	GS490	-	JDB00001	
0K8987	PP6050	3249750	GS277	-	SYC00001	
0K8987	PP6050	3367659	GS471	-	PRH00001	
0K8987	PP6050	3801431	GS471	-	PRH00001	
0K8987	PP6050	4391323	GS471	-	PRH03719	
0K8987	PP6050	4447558	GS471	-	PRH00001	
0K8987	PP6050	4447562	GS471	-	PRH00001	
0K8987	PP6050	5233431	GS471	-	PRH00001	
0K8987	PP6050	5612763	GS471	DK	PRH00001	
0K8987	PP6050	6034725	PG457	-	PRH00001	

Performance Parameter Reference

Parameters Reference: DM9600 - 15
PERFORMANCE DEFINITIONS
PERFORMANCE DEFINITIONS DM9600

APPLICATION: Engine performance tolerance values below are representative of a typical production engine tested in a calibrated dynamometer test cell at SAE J1995 standard reference conditions. Caterpillar maintains ISO9001:2000 certified quality management systems for engine test Facilities to assure accurate calibration of test equipment. Engine test data is corrected in accordance with SAE J1995. Additional reference material SAE J1228, J1349, ISO 8665, 3046-1:2002E, 3046-3:1989, 1585, 2534, 2288, and 9249 may apply in part or are similar to SAE J1995. Special engine rating request (SERR) test data shall be noted. PERFORMANCE PARAMETER TOLERANCE FACTORS: Power +/- 3% Torque +/- 3% Exhaust stack temperature +/- 8% Inlet airflow +/- 5% Intake manifold pressure-gage +/- 10% Exhaust flow +/- 6% Specific fuel consumption +/- 3% Specific fuel consumption (C7-C18) +/- 4% Fuel rate +/- 5% Specific DEF consumption +/- 3% DEF rate +/- 5% Heat rejection +/- 5% Heat rejection exhaust only +/- 10% Heat rejection CEM only +/- 10% Heat Rejection values based on using treated water. Torque is included for truck and industrial applications, do not use for Gen Set or steady state applications. On C7 - C18 engines, at speeds of 1100 RPM and under these values are provided for reference only, and may not meet the tolerance listed. On 3500 and C175 engines, at speeds below Peak Torque these values are provided for reference only, and may not meet the tolerance listed. These values do not apply to C280/3600. For these models, see the tolerances listed below. C280/3600 HEAT REJECTION TOLERANCE FACTORS: Heat rejection +/- 10% Heat rejection to Atmosphere +/- 50% Heat rejection to Lube Oil +/- 20% Heat rejection to Aftercooler +/- 5% TEST CELL TRANSDUCER TOLERANCE FACTORS: Torque +/- 0.5% Speed +/- 0.2% Fuel flow +/- 1.0% Temperature +/- 2.0 C degrees Intake manifold pressure +/- 0.1 kPa OBSERVED ENGINE PERFORMANCE IS CORRECTED TO SAE J1995 REFERENCE AIR AND FUEL CONDITIONS. REFERENCE ATMOSPHERIC INLET AIR FOR 3500 ENGINES AND SMALLER SAE J1228 AUG2002 for marine engines, and J1995 JAN2014 for other engines, reference atmospheric pressure is 100 KPA (29.61 in hg), and standard temperature is 25deg C (77 deg F) at 30% relative humidity at the stated aftercooler water temp, or inlet manifold temp. FOR 3600 ENGINES Engine rating obtained and presented in accordance with ISO 3046/1 and SAE J1995 JANJAN2014 reference atmospheric pressure is 100 KPA (29.61 in hg), and standard temperature is 25deg C (77 deg F) at 30% relative humidity and 150M altitude at the stated aftercooler water temperature. MEASUREMENT LOCATION FOR INLET AIR TEMPERATURE Location for air temperature measurement air cleaner inlet at stabilized operating conditions. REFERENCE EXHAUST STACK DIAMETER The Reference Exhaust Stack Diameter published with this dataset is only used for the calculation of Smoke Opacity values displayed in this dataset. This value does not necessarily represent the actual stack diameter of the engine due to the variety of exhaust stack adapter options available. Consult the price list, engine order or general dimension drawings for the actual stack diameter size ordered or options available. REFERENCE FUEL DIESEL Reference fuel is #2 distillate diesel with a 35API gravity; A lower heating value is 42,780 KJ/KG (18,390 BTU/LB) when used at 15 deg C (59 deg F), where the density is 850 G/Liter (7.0936 Lbs/Gal). GAS Reference natural gas fuel has a lower heating value of 33.74 KJ/L (905 BTU/CU Ft). Low BTU ratings are based on 18.64 KJ/L (500 BTU/CU FT) lower heating value gas. Propane ratings are based on 87.56 KJ/L (2350 BTU/CU Ft) lower heating value gas. ENGINE POWER (NET) IS THE CORRECTED FLYWHEEL POWER (GROSS) LESS EXTERNAL AUXILIARY LOAD Engine corrected gross output includes the power required to drive standard equipment; lube oil, scavenge lube oil, fuel transfer, common rail fuel, separate circuit aftercooler and jacket water pumps. Engine net power available for the external (flywheel) load is calculated by subtracting the sum of auxiliary load from the corrected gross flywheel out put power. Typical auxiliary loads are radiator cooling fans, hydraulic pumps, air compressors and battery charging alternators. For Tier 4 ratings additional Parasitic losses would also include Intake, and Exhaust Restrictions. ALTITUDE CAPABILITY Altitude capability is the maximum altitude above sea level at standard temperature and standard pressure at which the engine could develop full rated output power on the current performance data set. Standard temperature values versus altitude could be seen on TM2001. When viewing the altitude capability chart the ambient temperature is the inlet air temp at the compressor inlet. Engines with ADEM MEUI and HEUI fuel systems operating at conditions above the defined altitude capability derate for atmospheric pressure and temperature conditions outside the values defined, see TM2001. Mechanical governor controlled unit injector engines require a setting change for operation at conditions above the altitude defined on the engine performance sheet. See your Caterpillar technical representative for non standard ratings. REGULATIONS AND PRODUCT COMPLIANCE TMI Emissions information is presented at 'nominal' and 'Potential Site Variation' values for standard ratings. No tolerances are applied to the emissions data. These values are subject to change at any time. The controlling federal and local emission requirements need to be verified by your Caterpillar technical representative. Customer's may have special emission site requirements that need to be verified by the Caterpillar Product Group engineer. EMISSION CYCLE LIMITS: Cycle emissions Max Limits apply to cycle-weighted averages only. Emissions at individual load points may exceed the cycle-weighted limit. WET & DRY EXHAUST/EMISSIONS DESCRIPTION: Wet - Total exhaust flow or concentration of total exhaust flow Dry - Total exhaust flow minus water vapor or concentration of exhaust flow with water vapor excluded EMISSIONS DEFINITIONS: Emissions : DM1176 EMISSION CYCLE DEFINITIONS 1. For constant-speed marine engines for ship main propulsion, including,diesel-electric drive, test cycle E2 shall be applied, for controllable-pitch propeller sets test cycle E2 shall be applied. 2. For propeller-law-operated main and propeller-law-operated auxiliary engines the test cycle E3 shall be applied. 3. For constant-speed auxiliary engines test cycle D2 shall be applied. 4. For variable-speed, variable-load auxiliary engines, not included above, test cycle C1 shall be applied. HEAT REJECTION DEFINITIONS: Diesel Circuit Type and HHV Balance : DM9500 HIGH DISPLACEMENT (HD) DEFINITIONS: 3500: EM1500 RATING DEFINITIONS: Agriculture : TM6008 Fire Pump : TM6009 Generator Set : TM6035 Generator (Gas) : TM6041 Industrial Diesel : TM6010 Industrial (Gas) : TM6040 Irrigation : TM5749 Locomotive : TM6037 Marine Auxiliary : TM6036 Marine Prop (Except 3600) : TM5747 Marine Prop (3600 only) : TM5748 MSHA : TM6042 Oil Field (Petroleum) : TM6011 Off-Highway Truck : TM6039 On-Highway Truck : TM6038 SOUND DEFINITIONS: Sound Power : DM8702 Sound Pressure : TM7080 Date Released : 03/12/24
--

Generator Data

July 27,2026

[Spec Info](#) [Mechanical Data](#) [Cooling Data](#) [Motor Starting Curve](#)
[Reactive Capability Chart](#) [General Information](#)

Selected Model

Engine: C32 **Generator Frame:** E3855L4 **Genset Rating (kW):** 1000.0 **Line Voltage:** 480
Fuel: Diesel **Generator Arrangement:** 6145656 **Genset Rating (kVA):** 1250.0 **Phase Voltage:** 277
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 1503.5
Duty: STANDBY **Connection:** PARALLEL STAR **Application:** EPG **Status:** Current
Version: 20239 /20239 /20239 /677263

Spec Information

Generator Specification			Generator Efficiency		
Frame: E3855L4	Type: SR500	No. of Bearings: 1	Per Unit Load	kW	Efficiency %
Winding Type: RANDOM WOUND					
Flywheel: 18					
Connection: PARALLELSTAR					
Housing: 0					
Phases: 3			0.25	250	92.7
No. of Leads: 12			0.5	500	94.7
Poles: 4			0.75	750	95.9
Sync Speed: 1800			1	1000	96.2
Generator Pitch: 0.6667					

Reactances		Per Unit	Ohms
SUBTRANSIENT - DIRECT AXIS X''_d		0.0825	0.0152
SUBTRANSIENT - QUADRATURE AXIS X''_q		0.1600	0.0295
TRANSIENT - SATURATED X'_d		0.1600	0.0295
SYNCHRONOUS - DIRECT AXIS X_d		3.4142	0.6293
SYNCHRONOUS - QUADRATURE AXIS X_q		1.2061	0.2223
NEGATIVE SEQUENCE X_2		0.1204	0.0222
ZERO SEQUENCE X_0		0.0347	0.0064

Time Constants		Seconds
OPEN CIRCUIT TRANSIENT - DIRECT AXIS T'_{d0}		8.1000
SHORT CIRCUIT TRANSIENT - DIRECT AXIS T'_d		0.2450
OPEN CIRCUIT SUBTRANSIENT - DIRECT AXIS T''_{d0}		0.0349
SHORT CIRCUIT SUBTRANSIENT - DIRECT AXIS T''_d		0.0180
ARMATURE SHORT CIRCUIT T_a		0.0240

Short Circuit Ratio: 0.392	Stator Resistance = 0.008Ohms	Field Resistance = 2.5 Ohms
----------------------------	-------------------------------	-----------------------------

Voltage Regulation		Generator Excitation	
Voltage level adjustment: +/-	5.0%	No Load	Full Load, (rated) pf
Voltage regulation, steady state: +/-	0.5%		Series
Voltage regulation with 3% speed change: +/-	0.5%	Excitation voltage:	15.9 Volts
Waveform deviation line - line, no load: less than	2.0%	Excitation current	1.5 Amps
Telephone influence factor: less than	40		3.8 Amps

[Top...](#)

Selected Model

Engine: C32

Fuel: Diesel

Frequency: 60

Duty: STANDBY

Generator Frame: E3855L4

Generator Arrangement: 6145656

Excitation Type: Permanent Magnet

Connection: PARALLEL STAR

Genset Rating (kW): 1000.0

Genset Rating (kVA): 1250.0

Pwr. Factor: 0.8

Application: EPG

Line Voltage: 480

Phase Voltage: 277

Rated Current: 1503.5

Status: Current

Version: 20239 /20239 /20239 /677263

Generator Mechanical Information

Center of Gravity

Dimension X	-692 mm	-27.2 IN.
Dimension Y	0 mm	0.0 IN.
Dimension Z	0 mm	0.0 IN.

- "X" is measured from driven end of generator and parallel to rotor. Towards engine fan is positive. See General Information for details
- "Y" is measured vertically from rotor center line. Up is positive.
- "Z" is measured to left and right of rotor center line. To the right is positive.

Generator WT = 2370 kg * Rotor WT = 905 kg * Stator WT = 1215 kg

5,225 LB 1,995 LB 2,679 LB

Rotor Balance = 0.016 mm deflection PTP

Overspeed Capacity = 125% of synchronous speed

Generator Torsional Data

J1 = Coupling and Fan J2 = Rotor J3 = Exciter End

-8,841.9 MLB IN./rad

Total J

187.7 LB IN. s²

21.21 N m s²

[Top...](#)

Engine: C32

Fuel: Diesel

Frequency: 60

Duty: STANDBY

Generator Frame: E3855L4

Generator Arrangement: 6145656

Excitation Type: Permanent Magnet

Connection: PARALLEL STAR

Selected Model

Genset Rating (kW): 1000.0

Genset Rating (kVA): 1250.0

Pwr. Factor: 0.8

Application: EPG

Line Voltage: 480

Phase Voltage: 277

Rated Current: 1503.5

Status: Current

Version: 20239 /20239 /20239 /677263

Generator Cooling Requirements - Temperature - Insulation Data			
Cooling Requirements:		Temperature Data: (Ambient 40 °C)	
Heat Dissipated:	40 kW	Stator Rise:	105 °C
Air Flow:	108 m ³ /min	Rotor Rise:	105 °C
Insulation Class: H			
Insulation Reg. as shipped: 100MΩ minimum at 40 °C			

Thermal Limits of Generator	
Frequency:	60 Hz
Line to Line Voltage:	480 Volts
B BR 80/40	1120 kVA
F BR -105/40	1300 kVA
H BR - 125/40	1400 kVA
H PR - 150/40	1450 kVA


[Top...](#)

Selected Model

Engine: C32	Generator Frame: E3855L4	Genset Rating (kW): 1000.0	Line Voltage: 480
Fuel: Diesel	Generator Arrangement: 6145656	Genset Rating (kVA): 1250.0	Phase Voltage: 277
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 1503.5
Duty: STANDBY	Connection: PARALLEL STAR	Application: EPG	Status: Current
Version: 20239 /20239 /20239 /677263			


Starting Capability & Current Decrement
Motor Starting Capability (0.6 pf)

SKVA Percent Volt Dip	
238	2.5
471	5.0
699	7.5
937	10.0
1,200	12.5
1,438	15.0
1,724	17.5
2,005	20.0
2,313	22.5
2,634	25.0
3,101	27.5
3,580	30.0
4,258	32.5
4,808	35.0
5,437	37.5
6,058	40.0

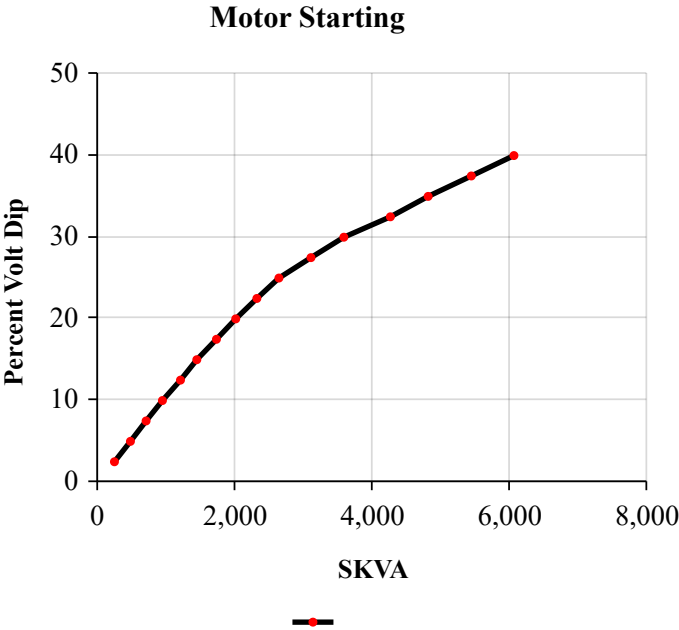

Current Decrement Data

E Time Cycle	AMP
0.0	18,225
1.0	10,554
2.0	8,629
3.0	7,779
4.0	7,361
5.0	7,122
8.0	6,771
10.0	6,544
13.0	6,381
15.0	6,246
20.0	6,062
25.0	5,957
30.0	5,901
35.0	5,877
40.0	5,871
45.0	5,875

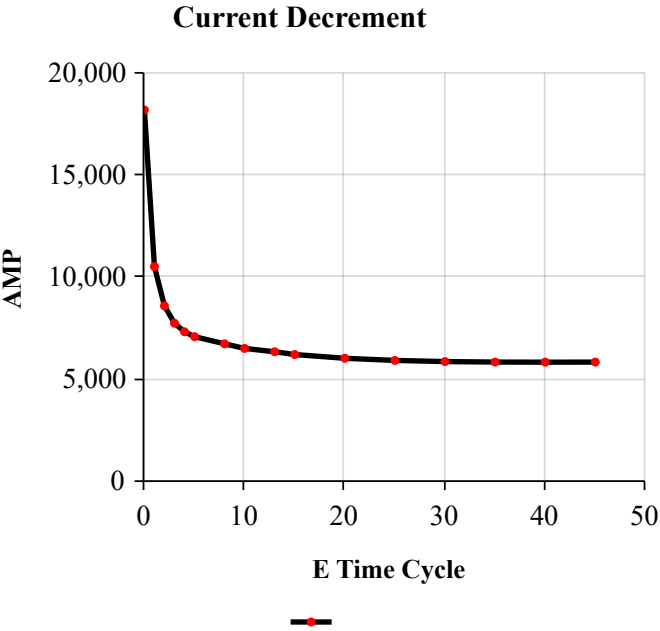

Instantaneous 3 Phase Fault Current: 18225 Amps Instantaneous Line - Line Fault Current: 15856 Amps
Instantaneous Line - Neutral Fault Current: 23692 Amps

[Top...](#)

Selected Model			
Engine: C32	Generator Frame: E3855L4	Genset Rating (kW): 1000.0	Line Voltage: 480
Fuel: Diesel	Generator Arrangement: 6145656	Genset Rating (kVA): 1250.0	Phase Voltage: 277
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 1503.5
Duty: STANDBY	Connection: PARALLEL STAR	Application: EPG	Status: Current
Version: 20239 /20239 /20239 /677263			

Reactive Capability Curve



[Top...](#)

Selected Model			
Engine: C32	Generator Frame: E3855L4	Genset Rating (kW): 1000.0	Line Voltage: 480
Fuel: Diesel	Generator Arrangement: 6145656	Genset Rating (kVA): 1250.0	Phase Voltage: 277
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 1503.5
Duty: STANDBY	Connection: PARALLEL STAR	Application: EPG	Status: Current
Version: 20239 /20239 /20239 /677263			

General Information

DM7802
GENERATOR GENERAL INFORMATION

- I. GENERATOR MOTOR STARTING CAPABILITY CURVES
- A. THE MOTOR STARTING CURVES ARE REPRESENTATIVE OF THE DATA OBTAINED BY THE FOLLOWING PROCEDURE:
1. THE CATERPILLAR GENERATOR IS DRIVEN BY A SYNCHRONOUS DRIVER.
 2. VARIOUS SIZE THREE PHASE INDUCTION MOTORS (NEMA CODE F) ARE STARTED ACROSS THE LINE LEADS OF THE UNLOADED GENERATOR.
 3. THE RESULTING VOLTAGE DIPS ARE RECORDED WITH AN OSCILLOSCOPE.
 4. MOTOR HORSEPOWER HAS BEEN CONVERTED TO STARTING KILOVOLT AMPERES (SKVA).
 5. RECORDED VOLTAGE DIPS HAVE BEEN EXPRESSED AS A OF GENERATOR RATED VOLTAGE.

II. USE OF THE MOTOR STARTING CAPABILITY CURVES.

A. CALCULATE THE SKVA REQUIRED BY THE MOTOR FOR FULL VOLTAGE STARTING ACROSS THE LINE IF THE VALUE IS NOT LISTED ON THE MOTOR DATA PLATE.

1. MOTORS CONFORMING TO NEMA STANDARDS

MULTIPLY THE MOTOR HORSEPOWER BY THE NEMA SKVA/HP FIGURE. FOR NEMA CODE F, USE 5.3 SKVA/HP; FOR NEMA CODE G, USE 6.0 SKVA/HP.

2. ALL OTHER MOTORS:

MULTIPLY THE RATED VOLTAGE BY THE LOCKED ROTOR AMPERE AND BY 0.001732. (IF THE LOCKED ROTOR AMPERES ARE NOT LISTED, MULTIPLY THE FULL LOAD (RUNNING) AMPERES BY B. USE THE ABOVE SKVA WITH THE MOTOR STARTING TABLE.

1. ACROSS LINE STARTING:

READ ACROSS THE ROW OF "ACROSS THE LINE STARTING SKVA IF THE DESIRED VALUE OF SKVA IS NOT GIVEN, CALCULATE THE DIP BY FINDING THE PROPER SKVA INTERVAL AND INTERPOLATING AS FOLLOWS:

SKVA1 IS THE SKVA TABLE ENTRY JUST SMALLER THAN THE DESIRED SKVA, DIP1 IS THE DIP FOR SKVA2, AND SKVA2 IS THE SKVA TABLE ENTRY JUST GREATER THAN THE DESIRED SKVA. THE DIP (IN PERCENT) AT THE DESIRED SKVA IS:

$$\text{DIP} = \text{DIP1} + (\text{SKVA} - \text{SKVA1}) * 2.5 / (\text{SKVA2} - \text{SKVA1})$$

NOTE: VOLTAGE DIPS GREATER THAN 35% MAY CAUSE MAGNETIC CONTACTORS TO DROP OUT.

2. REDUCED VOLTAGE STARTING:

REFER TO THE FOLLOWING TABLE. MULTIPLY THE CALCULATE ACROSS LINE SKVA BY THE MULTIPLIER LISTED FOR THE SPECIFIC STARTING METHOD. APPLY THE RESULT TO THE STARTING TABLE AS IN II A, TO CALCULATE THE EXPECTED VOLTAGE DIP:

TYPE OF REDUCED VOLTAGE STARTING	MULTIPLY LINE SKVA BY
80% TAP	.80
65% TAP	.65
50% TAP	.50
45% TAP	.45
Wye start, delta run	.33

AUTOTRANSFORMER

80% TAP	.68
65% TAP	.46
50% TAP	.29

NOTE: REDUCE VOLTAGE STARTING LOWERS THE MAXIMUM REQUIRED MOTOR SKVA.

3. Part winding starting:

Most common is half-winding start, full-winding run. Multiply the full motor, across line starting SKVA by 0.6. Apply the result to the selected curve as in ii. A above. Read the expected voltage dip, for the required SKVA.

III. DEFINITION:

A. GENERATOR TERMS

MODEL: Engine Sales model

ENG TYPE: DI = Direct Injection,

NA = Naturally aspirated, etc

HZ: Running frequency, hertz

RATING TYPE: PP, SB (prime power or standby)

KW: Base rating electrical kilowatts (ekW)

VOLTS: Rating terminal, line to line

GEN ARR: Cat generator arrangement part number

GEN FRAME: Generator frame size designation

CONN: Generator output connection

(star, wye, delta, ect.)

POLES: Number of pole pieces on rotor.

(eg. A 4 pole generator run at 1800)

RPM will produce 60 Hz alternating current. A 6 pole

generator run at 1200 RPM will produce 60 Hz alternating current.)

B. GENERATOR TEMPERATURE RISE:

The indicated temperature rise indicated the NEMA limits for standby or prime power applications. These rises are used for calculating the losses and efficiencies and are not necessarily indicative of the actual temperature rise of a given machine.

C. CENTER OF GRAVITY

The specified center of gravity is for the generator only.

For single bearing, and two bearing close coupled generators, the center of gravity is measured from the generator/engine flywheel housing interface and from the centerline of the rotor shaft.

For two bearing, standalone generators, the center of gravity is measured from the end of the rotor shaft and from the centerline of the rotor shaft.

For two bearing, standalone generators, the center of gravity is measured from the end of the rotor shaft and from the centerline of the rotor shaft.

D. GENERATOR DECREMENT CURRENT CURVES

The generator decrement current curve gives the symmetrical current supplied by the generator for a three phase bolted fault at the generator terminals. Generators equipped with the series boost attachment or generators with PM excitation system will supply 300% of rated current for at least 10 seconds.

E. GENERATOR EFFICIENCY CURVES

The efficiency curve is representative of the overall generator efficiency over the normal range of the electrical load and at the specified parameters. This is not the overall engine generator set efficiency curve.

Caterpillar Confidential: **Green**

Content Owner: Commercial Processes Division

Web Master(s): [PSG Web Based Systems Support](#)


Current Date: 7/27/2026, 1:24:40 PM

© Caterpillar Inc. 2026 All Rights Reserved.

[Privacy.](#)

[Cookie Settings](#)

AUTOMATIC VOLTAGE REGULATOR

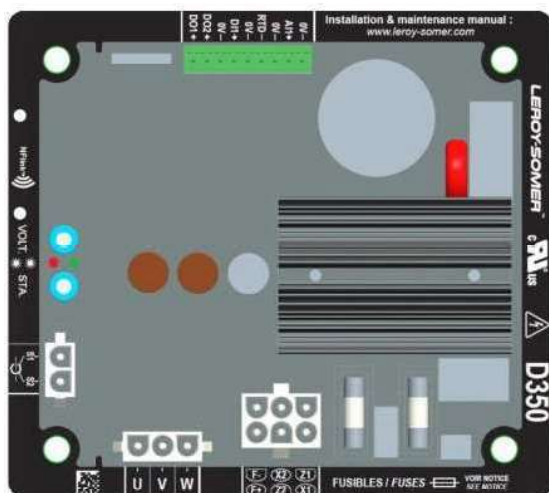


D350 AVR

The D350, Digital Voltage Regulator is used to regulate alternators with a field current of less than 5 A in continuous operations, and 10 A maximum in the event of short-circuit for 10 seconds maximum.

Its design is in accordance with mounting in a generator terminal box or a control cabinet. It is required, at a minimum, to follow the local protection and safety standards, especially those specific to electrical installations for voltages of 300 VAC phase-to-neutral maximum.

NFLink™ configuration module

The D350 is equipped with NFC technology for communication and configuration purposes. The configuration module is placed over the two dedicated positioning holes on the plastic enclosure as shown below. Once the configuration is done, the NF Link must be removed as it is not supposed to be left on the D350 when it is in continuous operation.

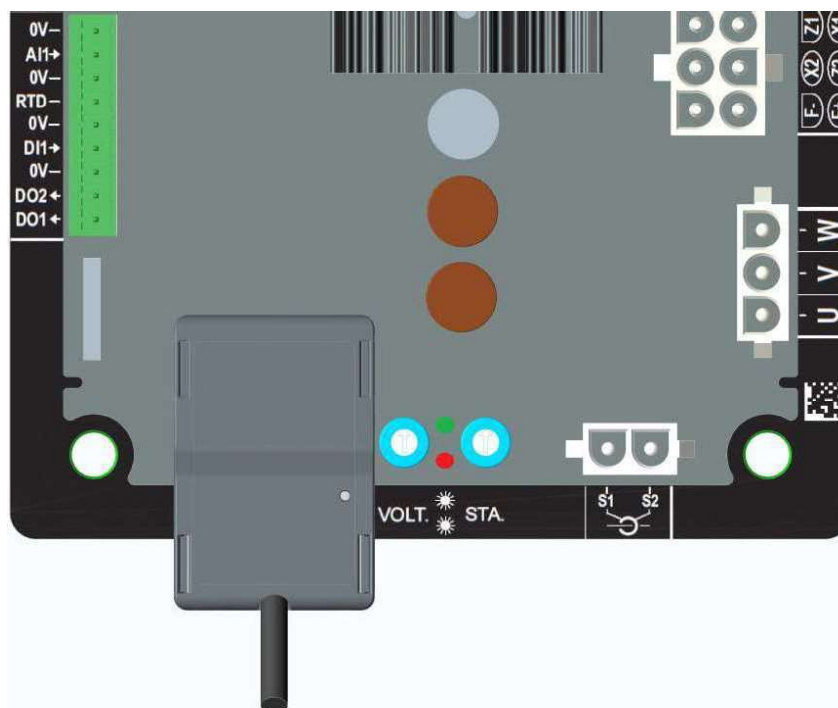

Technical characteristics

D350 regulator can be used to perform the following functions:

Voltage regulation

- With or without reactive droop compensation (Reactive droop to allow parallel operation)
- With or without line droop compensation.

Regulation of the field current, or manual mode, which allows direct control of the field current.

The D350 can also be used to:

- Adjust the reference for the regulation mode in progress, using an analogue input (0-10V and potentiometer)
- Monitoring of temperature sensor (Pt100 or CTP)
- Limit the minimum field current delivered to the exciter field
- Monitoring of the maximum stator current limit
- Loss of voltage sensing
- Withstand a sudden short-circuit for 10 seconds maximum in AREP, PMG
- Signals monitoring (events logger).
- 2 digital outputs for various trip, regulation mode and measurement data

Alternator voltage sensing:

- 3 phases without neutral, 2 phases or 1 phase with neutral
- Three-phase range 0-530VAC
- Consumption < 2VA

Stator current measurement with CT:

- Range 0-1A or 0-5A
- Consumption < 2VA

Power supply:

- 4 terminals for PMG, AREP, SHUNT
- Range 50-277 VAC
- Consumption max < 3000VA

Field excitation:

- Rated 0-5 A
- Short-circuit 10A max.
- Field winding resistance > 4 ohms

Frequency:

- Range 10-100Hz

AUTOMATIC VOLTAGE REGULATOR



- Regulation accuracy: $\pm 0.25\%$ of the average of the three phases on a linear load, with harmonic distortion less than 5%
- Voltage adjustment range: 0 to 150% of the rated voltage
- Quadrature droop adjustment range: -20% to 20%
- Under frequency protection: integrated, adjustable threshold, slope adjustable from 0.5 to 3V/Hz in steps of 0.1 V/Hz
- Excitation ceiling: adjustable by configuration at 3 points
- Environment: ambient temperature from -40°C to $+65^{\circ}\text{C}$, relative humidity of less than 95% non-condensing, mounted in a cabinet or in a terminal box

Easy Reg Advanced:

- All the D350 settings are entered / configured using the "EasyReg Advanced" software.
- This program is only compatible with computers running WINDOWS® versions Windows 7 and Windows 10 operating systems.

Dimensions:

- Height : 52.9mm
- width : 125mm
- Length : 140mm

Mounting:

- Holes spacing on the Length : 115mm
- Holes spacing on the width: 100mm

Weight: 0.45kg



Conformity to standards

- EMC: IEC 61000-6-2, IEC 61000-6-4
- Humidity: IEC 60068-1 and test in accordance with IEC 60068-2-14
- Dry heat: IEC 60068-2-2
- Damp heat: IEC 60028-2-30
- Cold: IEC 60068-2-1

AUTOMATIC VOLTAGE REGULATOR



D350 AVR and NFLink™ Dimensions

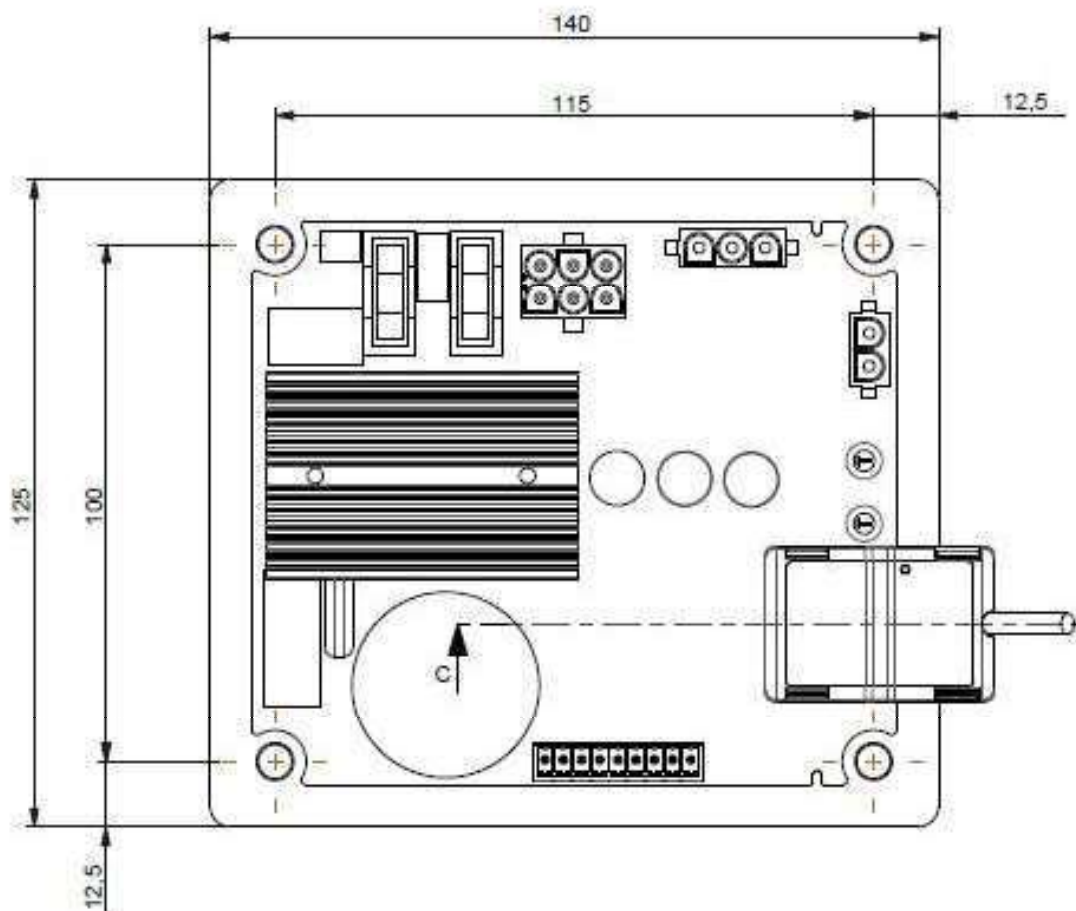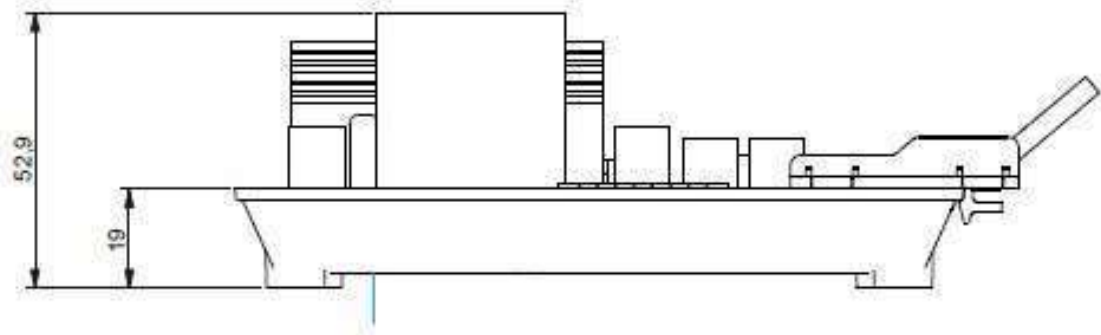

LEHE1923-00 (05-19)

www.Cat.com/electricpower

©2019 Caterpillar. All rights reserved. Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.



E3855L4 Frame

Picture shown may not reflect actual configuration

General Data	
Generator Frame	E3855L4
Insulation Class	190°C (H)
Degree of protection	IP23
Leads	12
Bearing	Single Bearing
Air flow (m ³ /min)	90 (50 Hz), 108 (60Hz)
Altitude (m) a.s.l.	≤1000m
Speed (rpm) – 50 Hz	1500
Speed (rpm) – 60 Hz	1800
Overspeed (rpm)	2250
Power Factor	0.8 and 1.0
T.H.D (Total Harmonic Distortion) (at no load) (%)	<5%
Non-drive end bearing	6322
Excitation system	Brushless with auxiliary coil
Stator Winding Pitch	2/3
Number of poles	4
Pole type	Saliente
Balancing	ISO1940-1

Winding Information					
Frequency	50 Hz		60 Hz		
Number for phases	Three Phase		Three Phase		
Parallel Star Y	400V	415V	380V	480V	600V
Exciter stator winding resistance at 20°C (Ohm)	10.63				
Stator winding resistance at 20°C (Ohm)	0.008				
Rotor winding resistance (Ohm)	2.5				
Voltage (V)					
Alternator mass (kg)	2370				
Inertia WR2 (kgm²)	21.214				
Frequency	50 Hz		60 Hz		
Number for phases	Three Phase		Three Phase		
Parallel Star Y	400V	415V	380V	480V	600V
Output (kVA)					
ΔT=105C (ta=40C)	1050	960	1200	1300	1300
ΔT=125C (ta=40C)	1150	1050	1320	1400	1400
ΔT=150C (ta=40C)	1200	1100	1380	1450	1450
Efficiency (%)					
Power Factor	0.8	0.8	0.8	0.8	0.8
25% of load	92.0	91.8	93.0	93.0	93.0
50% of load	94.8	94.9	95.1	95.1	95.1
75% of load	96.0	96.1	96.1	96.1	96.1
100% of load	95.7	95.5	96.0	96.0	96.0
110% of load	95.5	95.2	95.8	95.8	95.8
Electrical Data (FP=0.8 - ΔT=125C - ta=40C)					
Frequency	50 Hz		60 HZ		
Parallel Star Y Voltage	400V	415V	380V	480V	600V
Xd (%) – Direct axis synchronous reactance	312.9	265.4	317.4		
X'd (%) – Direct axis transient reactance	17.6	14.9	17.9		
X''d (%) – Direct axis subtransient reactance	9.1	7.72	9.24		
Xq (%) – Quadrature axis sync. reactance	133.1	112.9	135.1		
X''q (%) – Quadrature axis subtrans. reactance	17.6	14.9	17.9		
X2 (%) – Negative sequence reactance	13.3	11.3	13.5		
X0 (%) – Zero sequence reactance	3.8	3.25	3.89		
T'd (ms) – Direct axis trans. short circ. time constant	245	245	245		
T''d (ms) – Direct axis subtrans. short circ. time constant	18	18	18		
T'do (ms) – Transient open circuit time constant	8100	8100	8100		
Ta (ms) – Short circuit time const. of armature	24	24	24		
ic (A) – Full load excitation current	4.3	4.7	3.9	4.3	4.3
ic (A) – No load excitation current	1.5	1.6	1.4	1.5	1.5
Sustained short-circuit current (%)	300	300	300		
Short-circuit ratio (Kcc)	0.35	0.4	0.35		

LET'S DO THE WORK.™

www.cat.com/electricpower

©2021 Caterpillar

All rights reserved.

Materials and specifications are subject to change without notice.

The International System of Units (SI) is used in this publication.
 CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow" the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

Yancey Power Systems
259 Lee Industrial Blvd.
Austell, GA 30168-7406
770.941.2424 tel
770.941.2411 fax
877.278.6235 toll free
www.YanceyPower.com

Generator Control Information



Image shown might not reflect actual configuration

GCCP 1.2 - Control Panel

GCCP 1.2 is an auto Start Control Module suitable for a wide variety of diesel generator applications. Monitoring an extensive number of engine parameters, the modules will display warnings, shutdown and engine status information on the backlit LCD screen, illuminated LEDs and remote PC.

FEATURES

- 4-line back-lit LCD text display
- Multiple display languages
- Five-key menu navigation
- LCD alarm indication
- Customisable power-up text and images
- Data logging facility
- Internal PLC editor
- Protections disable feature
- Fully configurable via PC using USB & RS485 communication
- Front panel configuration with PIN protection
- Power save mode
- 3-phase generator sensing and protection
- Generator current and power monitoring (kW, kvar, kVA, pf)
- kW and kvar overload and reverse power alarms
- Over current protection
- Unbalanced load protection
- Breaker control via fascia buttons
- Fuel and start outputs configurable when using CAN
- Support for 0 V to 10 V & 4 mA to 20 mA sensors
- 8 configurable digital inputs (3 available for Customer use)
- 8 configurable digital outputs (5 available for Customer use)
- 4 configurable analogue outputs (3 available for Customer Use)
- CAN, MPU and alternator frequency speed sensing in one variant
- Real time clock
- Engine pre-heat and post-heat functions
- Engine run-time scheduler
- Engine idle control for starting & stopping
- Fuel usage monitor and low fuel level alarms
- 3 configurable maintenance alarms

BENEFITS

- Hours counter provides accurate information for monitoring and maintenance periods
- User-friendly set-up and button layout for ease of use
- Multiple parameters are monitored & displayed simultaneously for full visibility
- The module can be configured to suit a wide range of applications for user flexibility
- PLC editor allows user configurable functions to meet user specific application requirements.
- RS485 Communication port can be used for the Remote Monitoring Communication (Compatible with Cat PLG)

SPECIFICATION

DC SUPPLY

CONTINUOUS VOLTAGE RATING

8 V to 35 V Continuous
5 V for upto 1 minute

CRANKING DROPOUTS

Able to survive 0 V for 100 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries.

LEDs and backlight will not be maintained during cranking.

MAXIMUM OPERATING CURRENT

260 mA at 12 V, 150 mA at 24 V

MAXIMUM STANDBY CURRENT

145 mA at 12 V, 85 mA at 24 V

CHARGE FAIL/EXCITATION RANGE

0 V to 35 V

GENERATOR & MAINS (UTILITY) VOLTAGE RANGE

15 V to 415 V AC (Ph to N)
26 V to 719 V AC (Ph to Ph)

FREQUENCY RANGE

3.5 Hz to 75 Hz

MAGNETIC PICKUP VOLTAGE RANGE

+/- 0.5 V to 70 V

FREQUENCY RANGE

10,000 Hz (max)

INPUTS

DIGITAL INPUTS A TO H

Negative switching

ANALOGUE INPUTS A & D

Configurable as:
Negative switching digital input 0 V to 10 V sensor
4 mA to 20 mA sensor Resistive sensor

ANALOGUE INPUTS B & C

Configurable as:
Negative switching digital input Resistive sensor

OUTPUTS

OUTPUT A & B (FUEL & START)

15 A DC at supply voltage

AUXILIARY OUTPUTS C, D, E, F, G & H

2 A DC at supply voltage

DIMENSIONS OVERALL

216 mm x 158 mm x 43 mm
8.5" x 6.2" x 1.5"

PANEL CUT-OUT

184 mm x 137 mm
7.2" x 5.3"

MAXIMUM PANEL THICKNESS

8 mm
0.3"

STORAGE TEMPERATURE RANGE

-40°C to +85°C
-40 °F to +185 °F

OPERATING TEMPERATURE RANGE

-30°C to +70°C
-22 °F to +158 °F



Image shown might not reflect actual configuration

Remote Annunciator Module

It is an LED expansion module that can be used with compatible control modules. The module has been designed to display a maximum of eight individual LED indications up to a maximum distance of 1 KM (0.6 miles).

The Annunciator will consist of two modules to provide a 16 Channel Fault annunciation.

It is presented in a vertical enclosure. It includes an alarm sounder that is triggered when the host controller detects an alarm condition. The alarm can be muted using the front push button.

The Panels will be fitted with removable label cards which can be used to identify the standard NFPA alarms. If desired

It includes individual LEDs for each channel and a 'Power On' LED that flashes when the link with the host controller is lost.

FEATURES

- The Remote annunciator has an integral Sounder / Horn
- Eight configurable LEDs (per module)
- Works up to 1 KM (0.6 miles) from the host controller
- A single Controller can support five Caterpillar Configured remote annunciator control boxes

ENVIRONMENTAL TESTING STANDARDS

ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2
EMC Generic Immunity Standard for the Industrial Environment
BS EN 61000-6-4
EMC Generic Emission Standard for the Industrial Environment

ELECTRICAL SAFETY

BS EN 60950
Safety of Information Technology Equipment, including Electrical Business Equipment

TEMPERATURE

BS EN 60068-2-1
Ab/Ae Cold Test -30 °C BS EN 60068-2-2
Bb/Be Dry Heat +70°C

VIBRATION

BS EN 60068-2-6
Ten sweeps in each of three major axes
5 Hz to 8 Hz @ +/-7.5 mm, 8 Hz to 500 Hz @ 2 gn

SHOCK

BS EN 60068-2-27
Three shocks in each of three major axes 15 gn in 11 Ms

HUMIDITY

BS EN 60068-2-30
Db Damp Heat Cyclic 20/55 °C @ 95% RH 48 Hours
BS EN 60068-2-78
Cab Damp Heat Static 40 °C @ 93% RH 48 Hours

DEGREES OF PROTECTION PROVIDED BY ENCLOSURES BS EN 60529

IP65 - Front of module when installed into the control panel with the supplied sealing gasket.

SPECIFICATION

CONTINUOUS VOLTAGE RATING

8 V to 35 V Continuous

CRANKING DROPOUTS

Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries. LEDs and backlight will not be maintained during cranking.

MAXIMUM OPERATING CURRENT

112 mA at 12 V, 53 mA at 24 V

MAXIMUM STANDBY CURRENT


74 mA at 12 V, 35 mA at 24 V

DIMENSIONS OVERALL

275.5 mm x 214.2 mm x 108.8 mm
10.85" x 8.43" x 4.28"

MAXIMUM PANEL THICKNESS

8 mm
0.3"

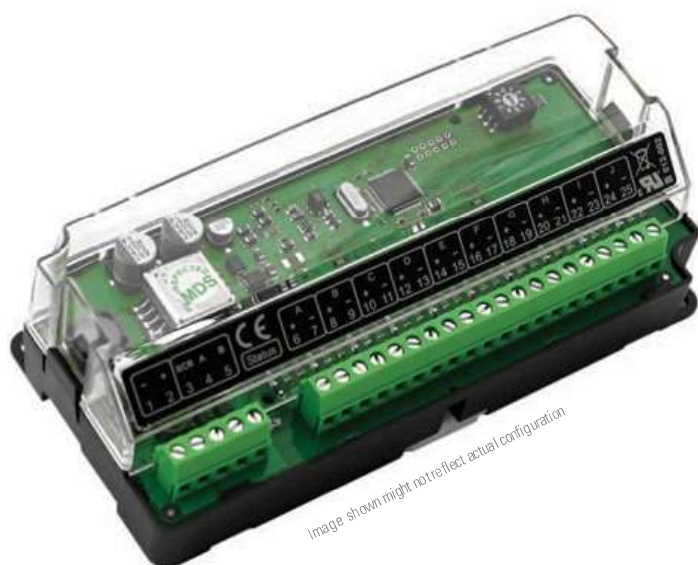

Input Expansion Module

The Ratiometric Input Expansion module is used in conjunction with supported controllers to provide additional, flexible, input functionality. The module's ID switch is configurable from the module and the 10 inputs can be configured from within the 'host controller'.

The ratiometric inputs can be configured in a number of ways to connect to digital switches, resistive sensors, 0-10V DC signals or 4-20 mA signals.

LED indication is provided for 'Power On' and 'Link Lost'

FEATURES

- Power On/Link Lost LED
- 10 inputs configurable for digital/resistive 4-20 mA and 0-10 V DC
- A maximum of 4 modules can be connected to 1 host control module to provide up to 40 additional configurable inputs
- Works up to 1.2 km (0.75 miles) from the host controller
- Terminal strip connection for quick and easy set-up

ENVIRONMENTAL TESTING STANDARDS

ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2

EMC Generic Immunity Standard for the Industrial Environment

BS EN 61000-6-4

EMC Generic Emission Standard for the Industrial Environment

ELECTRICAL SAFETY

BS EN 60950

Safety of Information Technology Equipment, including Electrical Business Equipment

TEMPERATURE

BS EN 60068-2-1

Ab/Ae Cold Test -30 °C BS EN 60068-2-2

Bb/Be Dry Heat+70°C

VIBRATION

BS EN 60068-2-6

Ten sweeps in each of three major axes

5 Hz to 8 Hz @ +/-7.5 mm, 8 Hz to 500 Hz @ 2 gn

SHOCK

BS EN 60068-2-27

Three shocks in each of three major axes 15 gn in 11 Ms

HUMIDITY

BS EN 60068-2-30

Db Damp Heat Cyclic 20/55 °C @ 95% RH 48 Hours

BS EN 60068-2-78

Cab Damp Heat Static 40 °C @ 93% RH 48 Hours

DEGREES OF PROTECTION PROVIDED BY ENCLOSURES BS EN

60529

IP21

SPECIFICATION

CONTINUOUS VOLTAGE RATING

8 V to 35 V Continuous

CRANKING DROPOUTS

Able to survive 0 V for 50 ms, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries. LEDs light will not be maintained during cranking.

MAXIMUM OPERATING CURRENT

292 mA at 12 V, 167 mA at 24 V mA at 24 V

MAXIMUM STANDBY CURRENT

101 mA at 12 V, 167 mA at 24 V

INPUTS

10 inputs configurable for digital/resistive (3k ohms) 4-20 mA and 0-10 V DC

DIMENSIONS OVERALL

165 mm x 76 mm x 49 mm

6.5" x 3" x 1.9"

STORAGE TEMPERATURE RANGE

-40°C TO +85°C



Image shown might not reflect actual configuration

OUTPUT EXPANSION MODULE

Output relay expansion module for use with compatible control modules. The Output Expansion module has been designed to extend a host module's output capabilities.

A maximum of 10 Output Expansion modules can be connected to an individual module at any one time. All outputs are configurable via the host controller.

The module will work up to 1 KM (0.6miles) from the host control module

FEATURES

- Power On/Link Lost LED ID SWITCH
- 10 expansion modules can be connected to 1 host controller at a time
- 8 configurable relay contacts with LED indicators:
- 4 Normally Open (N/O)
- 4 Change Over (C/O)
- Terminal strip connection for quick and easy set-up

ENVIRONMENTAL TESTING STANDARDS

ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2

EMC Generic Immunity Standard for the Industrial Environment

BS EN 61000-6-4

EMC Generic Emission Standard for the Industrial Environment

ELECTRICAL SAFETY

BS EN 60950

Safety of Information Technology Equipment, including Electrical Business Equipment

TEMPERATURE

BS EN 60068-2-1

Ab/Ae Cold Test -30 °C BS EN 60068-2-2

Bb/Be Dry Heat+70°C

VIBRATION

BS EN 60068-2-6

Ten sweeps in each of three major axes

5 Hz to 8 Hz @ +/-7.5 mm, 8 Hz to 500 Hz @ 2 gn

SHOCK

BS EN 60068-2-27

Three shocks in each of three major axes 15 gn in 11 Ms

HUMIDITY

BS EN 60068-2-30

Db Damp Heat Cyclic 20/55 °C @ 95% RH 48 Hours

BS EN 60068-2-78

Cab Damp Heat Static 40 °C @ 93% RH 48 Hours

SPECIFICATION

CONTINUOUS VOLTAGE RATING

8 V to 35 V Continuous

CRANKING DROPOUTS

Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries. LEDs and backlight will not be maintained during cranking.

MAXIMUM OPERATING CURRENT

325 mA at 12 V, 152 mA at 24 V

MAXIMUM STANDBY CURRENT

70 mA at 12 V, 32 mA at 24 V

AUXILIARY RELAY CONTACTS

2 Amp DC rated voltage free

DIMENSIONS OVERALL

165 mm x 76 mm x 49 mm

6.5" x 3" x 1.9"

Yancey Power Systems
259 Lee Industrial Blvd.
Austell, GA 30168-7406
770.941.2424 tel
770.941.2411 fax
877.278.6235 toll free
www.YanceyPower.com

Generator Enclosure *&* *Fuel System Information*



Image shown may not reflect actual configuration.

Enclosures

D800 GC – D1250 GC NA

C27 / C32

Sound Attenuated and Weather Protective

These sound attenuated and weather protective, factory installed enclosures are designed for safety and aesthetic value. Rugged construction provides weather protection and the ability to withstand exposure to the elements.

FEATURES

Robust/Highly Corrosion-Resistant Construction

- Environmentally friendly, polyester powder-baked paint in Caterpillar White
- Zinc plated and stainless steel fasteners
- 14-Gauge steel construction
- Flat roof with protection for water ingress from rain
- Critical grade internally mounted muffler/exhaust system
- Soft mounted isolators
- 75 dbA @ 7m for sound attenuated enclosures
- 100 mph wind loading
- Refer TMI for ambient capability data

Excellent Access

- Control panel mounted on RH side with an optional auxiliary box on the LH side of the package
- Large cable entry area for the ease of installation
- Left-hand or Right-hand bottom entry access to power cable bus or circuit breaker
- Multiple doors on both sides allow easy access to service points
- Hinged doors allow 180° opening rotation
- Lube oil and coolant drains piped to exterior of enclosure and terminated drain valves
- Radiator fill cover

Options

- Weather protective enclosure available with same footprint
- Interior DC lighting systems
- Caterpillar White paint (default)
- 100 (factory installed), 3000 and 4000 (shipped loose) gallon fuel tanks


Security and Safety

- Lockable access doors with standard key use
- Cooling fan and battery charging alternator fully guarded
- Oil fill and battery can only be reached via lockable access
- External fuel connections
- Externally mounted emergency stop buttons
- Designed for spreader bar lifting to ensure safety

Certifications

- UL 2200 listed & cUL
- Seismic certification per applicable building codes: IBC 2021
- Tested and analysed in accordance with: ASCE 7-98, ASCE 7-02, ASCE 7-05, ICC-ES AC-156

Enclosure Weights and Dimensions

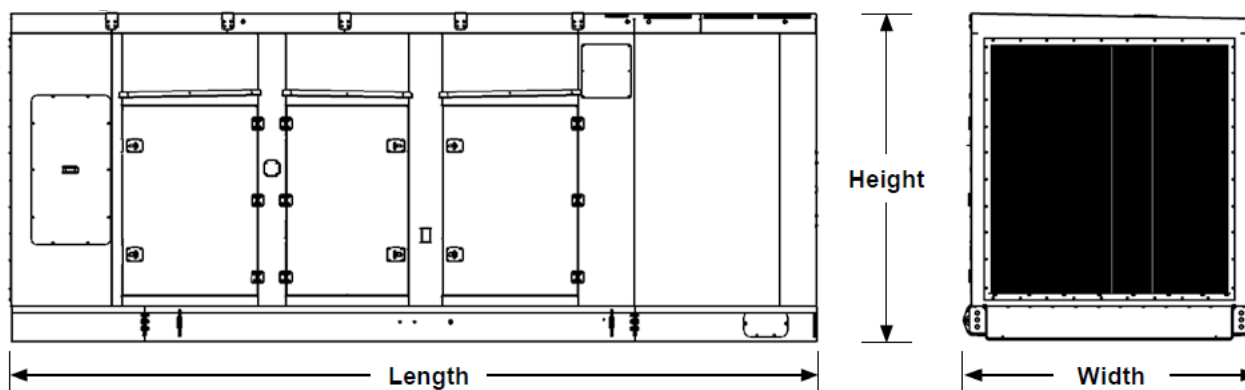

Sound Attenuated Enclosure Base Options*	Weight kgs (lbs)	Length mm (in)	Width mm (in)	Height mm (in)
With lifting base	2672 (5891)	6610 (260)	2342 (92.2)	2350 (92.5)
With 2100 gal integral tank base	4891 (10783)	7620 (300)	2350 (92.5)	3265 (128.5)
With 3000 gal tank with lifting base	5638 (12429)	7646 (301)	2471 (97)	3565 (140)
With 4200 gal tank with lifting base	6563 (14468)	7646 (301)	2471 (97)	3870 (152)

Weather Protective Enclosure Base Options*	Weight kgs (lbs)	Length mm (in)	Width mm (in)	Height mm (in)
With lifting base	2452 (5405)	6610 (260)	2342 (92.2)	2350 (92.5)
With 2100 gal integral tank base	4671 (10298)	7620 (300)	2350 (92.5)	3265 (128.5)
With 3000 gal tank with lifting base	5418 (11944)	7646 (301)	2471 (97)	3565 (140)
With 4200 gal tank with lifting base	6343 (13984)	7646 (301)	2471 (97)	3870 (152)

Note: For reference only – do not use for installation design. Please contact your dealer for exact weights and dimensions.

*Weight does not include package generator set weight.

Exhaust Back-Pressure Data

Generator Set Models	Enclosed Set L2 (75 dBA) kPa (allowable) at 100% Load
D800 GC	—
D1000 GC	—
D1250 GC	6.7

Generator Set Weights

Generator Set Weights**	Weight kgs (lbs)
C27 Open generator set	5813 (12815)
C32 Open generator set	6798 (14987)

**Dry Weight of heaviest configuration and without base rail weight (Does not include exhaust system weights).

www.cat.com/electricpower

©2024 Caterpillar
All rights reserved.

LET'S DO THE WORK.™

LEHE20344-04 (04/24)

Materials and specifications are subject to change without notice.

The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow" the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.



100 Amp Load Center

Image shown may not reflect actual package


Specifications

Number of spaces	6
Number of circuits	12
Number of tandem circuit breakers	6
System voltage	120/240VAC
NEMA degree of protection	NEMA 3R outdoor
Electrical connection	Lugs
Wiring configuration	3-wire
Material	Tin plated aluminum busbar
Enclosure material	Welded galvanized steel
Cover finish	Gray baked enamel
Product certifications	UL E-6294

www.cat.com/electricpower
©2019 Caterpillar
All rights reserved.

Information contained in this publication may be considered confidential. Discretion is recommended when distributing. Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

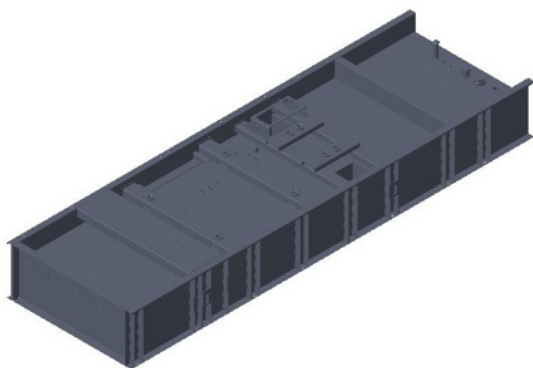

Picture shown may not reflect actual configuration

Fuel Tank Bases for D800 GC - D1250 GC

Dual Wall fuel tank bases offer an integrated fuel solution for your Cat GC diesel generator set.

Features

- UL 142 (US) and ULC S601 (Canada) Listed
- Facilitates compliance to NFPA 30, 70 and 110
- CSA C282-09 and B139-04 installation compliant
- Dual wall, secondary containment (minimum of 110% of primary tank capacity)
- Tank design provides capacity for thermal expansion of fuel
- Direct reading fuel level gauge
- Fuel supply dip tube is positioned so as not to pick up fuel sediment
- Fuel return and supply dip tubes are separated by an internal baffle to prevent recirculation of heated return fuel
- Fuel fill – 43 mm (1.7 in), lockable flip top cap
- Primary tank level detection switch in containment basin
- Primary and secondary tanks are leak tested at 20.7 kPa (3 psi) minimum
- Interior tank surfaces coated with a solvent-based thin-film rust preventative
- Heavy gauge steel gussets suitable for lifting package (2100 gal only)
- Gloss black polyester alkyd acrylic enamel exterior paint over epoxy based primer
- Primary tanks are equipped with customer Lockable 2" raised fuel fill with optional seven gallon spill containment
- Leak detection switch
- Port for access to containment tank
- Removable engine supply and return dip tubes
- Fittings for opt fuel levels or auxiliary fuel pump
- Excellent stub-up access beneath circuit breaker (within fuel tank)
- Emergency vents on primary and secondary tanks are sized in accordance with NFPA 30, external to enclosure.
- Optional installed fuel level indication at the generator set control panel.
- Optional seismic certification per applicable building codes: IBC 2021
- Tested and analyzed in accordance with: ASCE 7-98, ASCE 7-02, ASCE 7-05, ICC- ES AC-156
- Anchoring details are site specific, and are dependent on many factors such as generator set size, weight, and concrete strength. IBC Certification requires that the anchoring system used is reviewed and approved by a Professional Engineer.



Standby Rating		Engine	Strategy	Run Time @ 100% Load (Hrs)		
ekW	kVA			2100 gal	3000 gal*	4200 gal*
1250	1562	C32	ESE (Tier 2)	24.3	34.8	48.7
1000	1250	C32	ESE (Tier 2)	29.4	42.0	58.7
800	1000	C27	ESE (Tier 2)	37.8	54.0	75.5

*Requires enclosure lifting base, and fuel tank is shipped loose. Not available with IBC certification.

LET’S DO THE WORK.™

www.cat.com/electricpower
©2022 Caterpillar All rights reserved.

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, LET’S DO THE WORK, their respective logos, “Caterpillar Corporate Yellow” the “Power Edge” and Cat “Modern Hex” trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.



7 Gallon Fuel Spill containment for 1000 or 2000 gallon fuel tanks for C27 and C32.

Durable spill containment box designed for containment of small spills during filling of an above ground storage tank.

Image shown may not reflect actual configuration

Features



- ULC listing
- The base and lid made of 12 gauge mild steel
- Nylon washers at contact points to prevent rust
- Spun construction minimizes leakage

- Weather deflecting lid
- Push drain
- Cover lock
- Offset drain style
- Rolled lip on base

Dimensions

- Height: 406.4mm (16")
- Height with handle: 457.2mm (18")

- Width: 441.3mm (17.4")
- Pipe diameter: 114.3 (4.5")
- Body diameter: 384.8 (15.14")

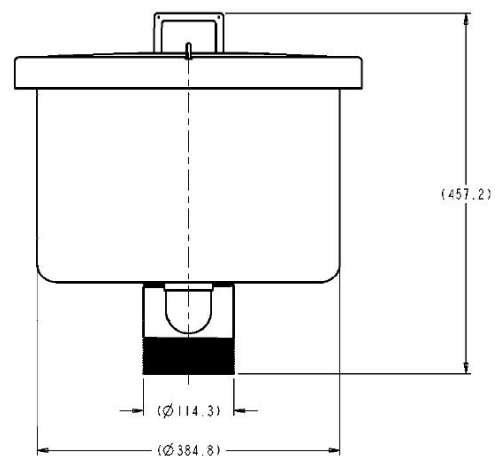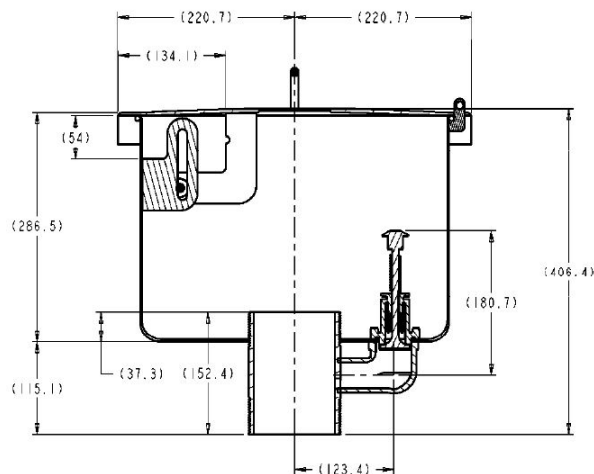



Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

Yancey Power Systems
259 Lee Industrial Blvd.
Austell, GA 30168-7406
770.941.2424 tel
770.941.2411 fax
877.278.6235 toll free
www.YanceyPower.com

Generator Drawings *&* *Wiring Schematics*

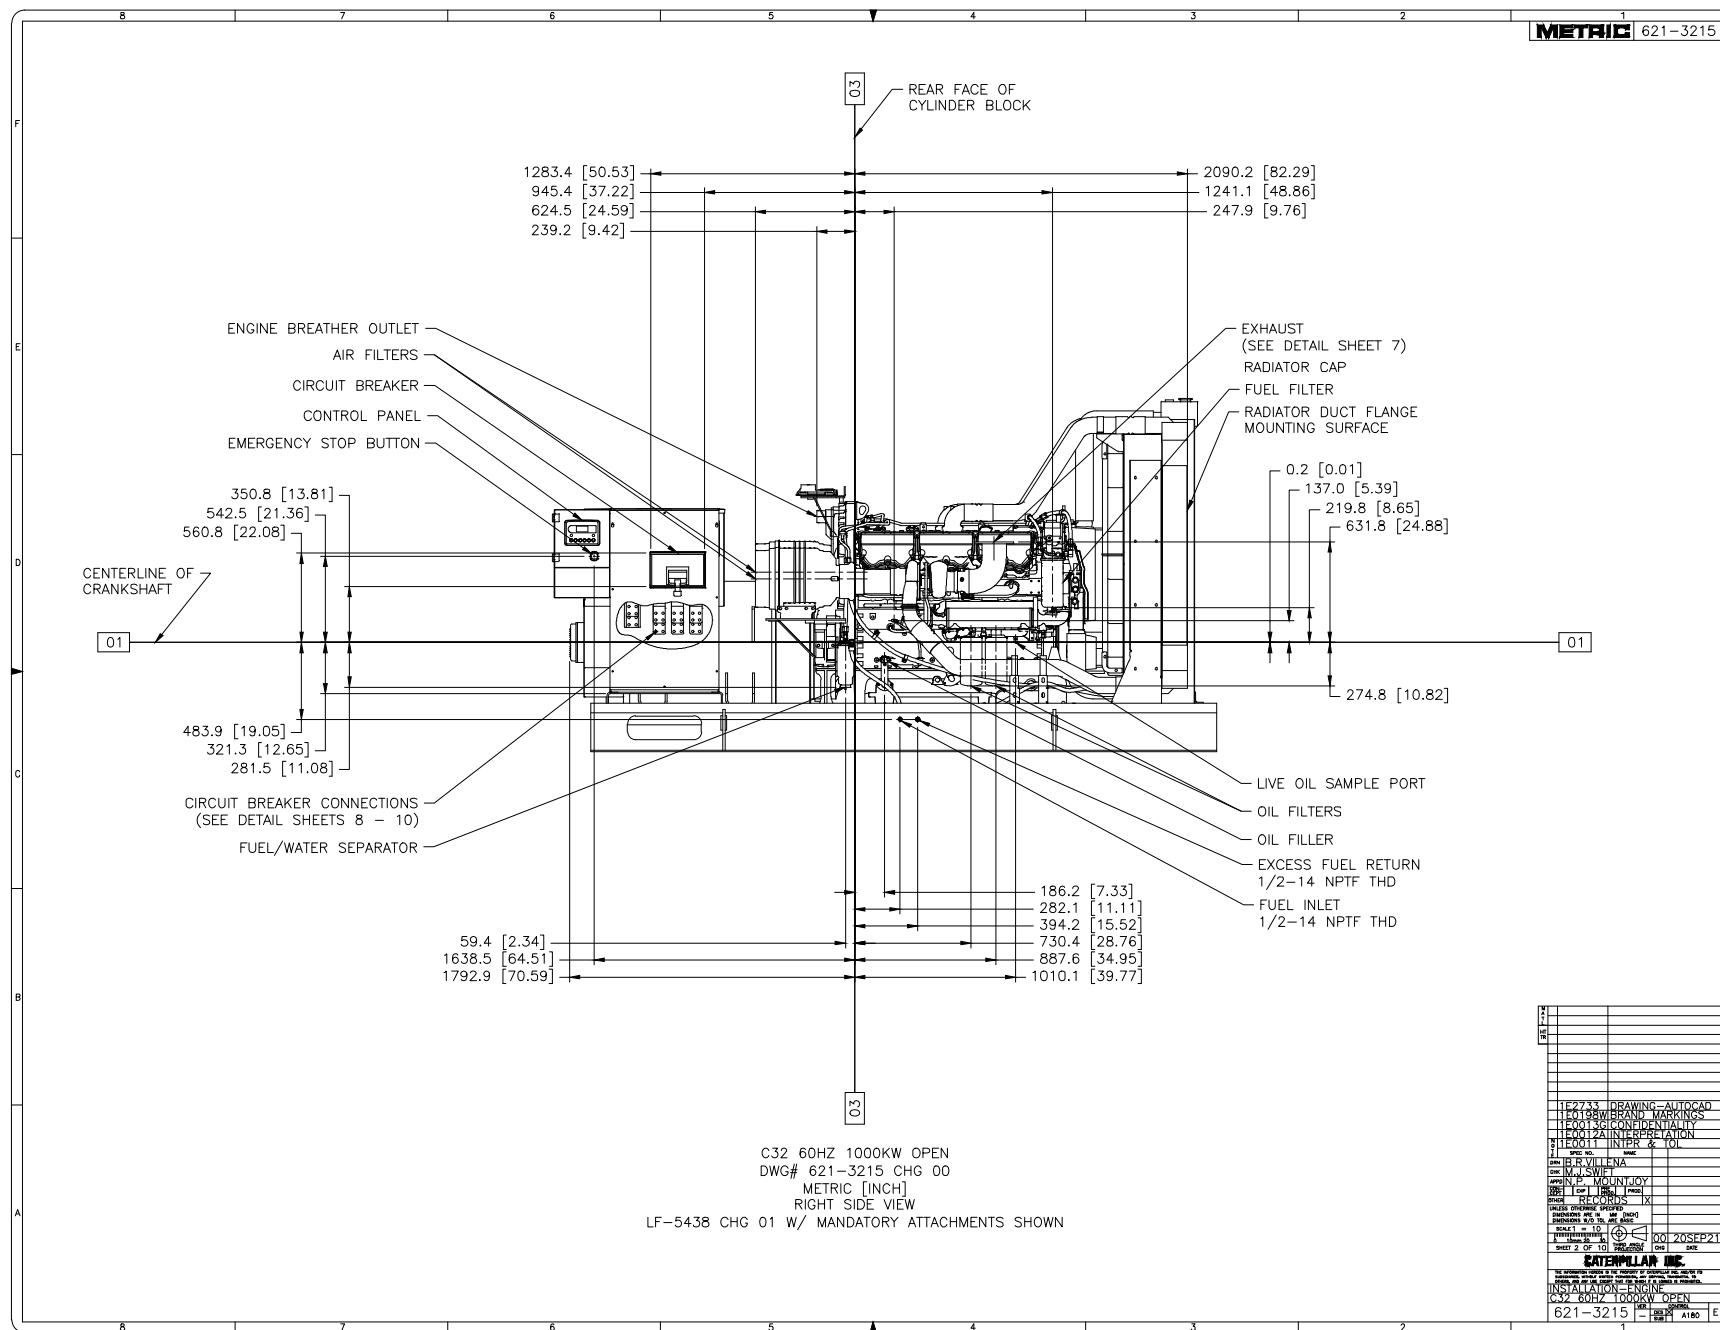


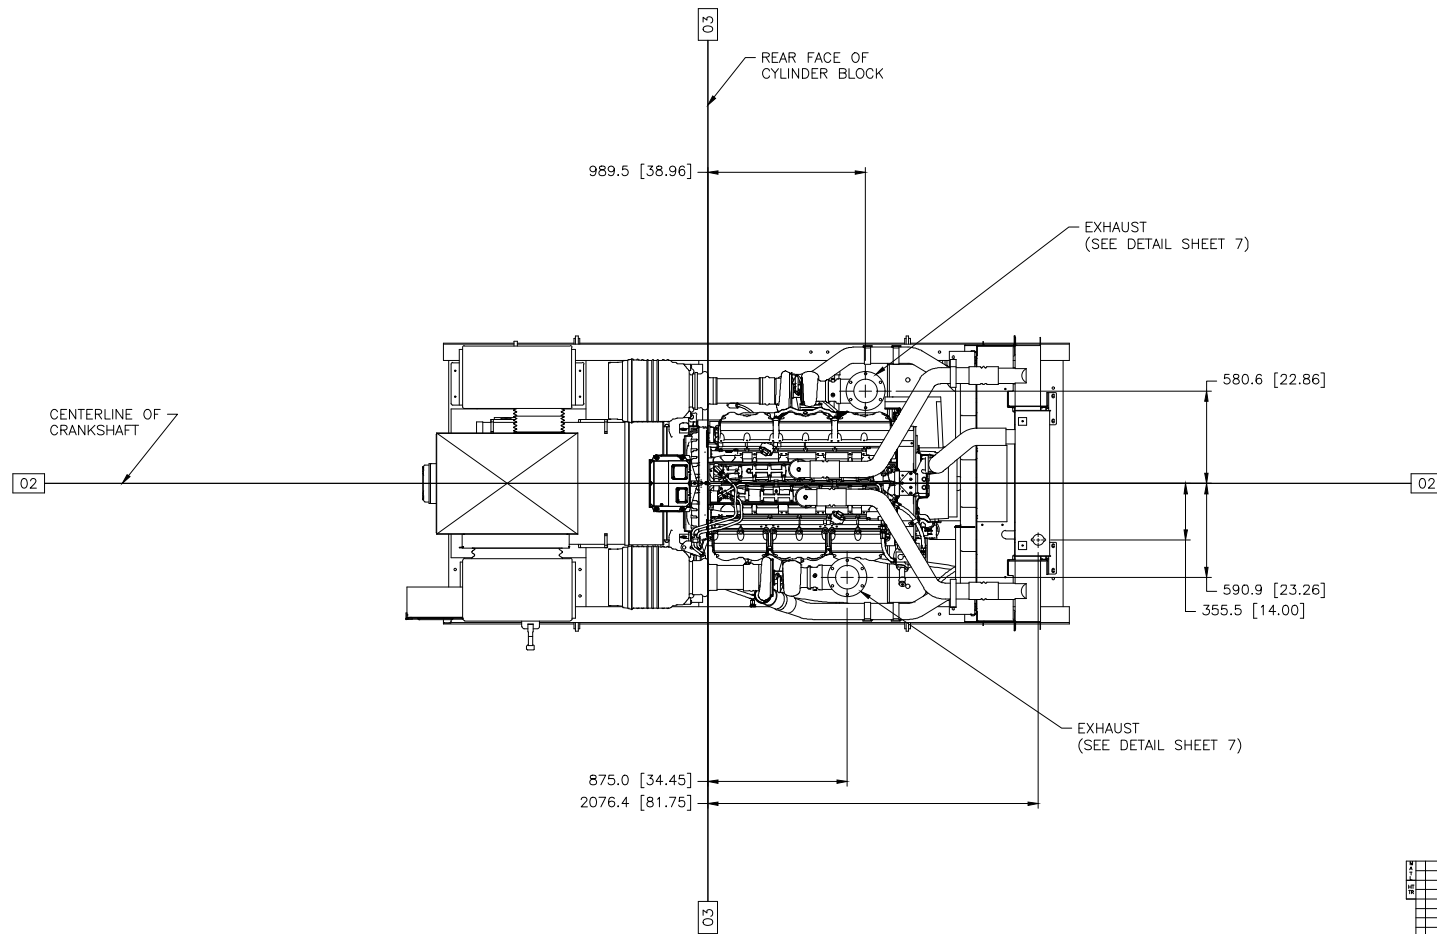



C32 60HZ 1000KW OPEN
 DWG# 621-3215 CHG 00
 METRIC [INCH]
 TOP VIEW
 LF-5438 CHG 01 W/ MANDATORY ATTACHMENTS SHOWN

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	1011	1012	1013	1014	1015	1016	1017	1018	1019	1020	1021	1022	1023	1024	1025	1026	1027	1028	1029	1030	1031	1032	1033	1034	1035	1036	1037	1038	1039	1040	1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	1051	1052	1053	1054	1055	1056	1057	1058	1059	1060	1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	1071	1072	1073	1074	1075	1076	1077	1078	1079	1080	1081	1082	1083	1084	1085	1086	1087	1088	1089	1090	1091	1092	1093	1094	1095	1096	1097	1098	1099	1100	1101	1102	1103	1104	1105	1106	1107	1108	1109	1110	1111	1112	1113	1114	1115	1116	1117	1118	1119	1120	1121	1122	1123	1124	1125	1126	1127	1128	1129	1130	1131	1132	1133	1134	1135	1136	1137	1138	1139	1140	1141	1142	1143	1144	1145	1146	1147	1148	1149	1150	1151	1152	1153	1154	1155	1156	1157	1158	1159	1160	1161	1162	1163	1164	1165	1166	1167	1168	1169	1170	1171	1172	1173	1174	1175	1176	1177	1178	1179	1180	1181	1182	1183	1184	1185	1186	1187	1188	1189	1190	1191	1192	1193	1194	1195	1196	1197	1198	1199	1200	1201	1202	1203	1204	1205	1206	1207	1208	1209	1210	1211	1212	1213	1214	1215	1216	1217	1218	1219	1220	1221	1222	1223	1224	1225	1226	1227	1228	1229	1230	1231	1232	1233	1234	1235	1236	1237	1238	1239	1240	1241	1242	1243	1244	1245	1246	1247	1248	1249	1250	1251	1252	1253	1254	1255	1256	1257	1258	1259	1260	1261	1262	1263	1264	1265	1266	1267	1268	1269	1270	1271	1272	1273	1274	1275	1276	1277	1278	1279	1280	1281	1282	1283	1284	1285	1286	1287	1288	1289	1290	1291	1292	1293	1294	1295	1296	1297	1298	1299	1300	1301	1302	1303	1304	1305	1306	1307	1308	1309	1310	1311	1312	1313	1314	1315	1316	1317	1318	1319	1320	1321	1322	1323	1324	1325	1326	1327	1328	1329	1330	1331	1332	1333	1334	1335	1336	1337	1338	1339	1340	1341	1342	1343	1344	1345	1346	1347	1348	1349	1350	1351	1352	1353	1354	1355	1356	1357	1358	1359	1360	1361	1362	1363	1364	1365	1366	1367	1368	1369	1370	1371	1372	1373	1374	1375	1376	1377	1378	1379	1380	1381	1382	1383	1384	1385	1386	1387	1388	1389	1390	1391	1392	1393	1394	1395	1396	1397	1398	1399	1400	1401	1402	1403	1404	1405	1406	1407	1408	1409	1410	1411	1412	1413	1414	1415	1416	1417	1418	1419	1420	1421	1422	1423	1424	1425	1426	1427	1428	1429	1430	1431	1432	1433	1434	1435	1436	1437	1438	1439	1440	1441	1442	1443	1444	1445	1446	1447	1448	1449	1450	1451	1452	145
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-----

[illegible]

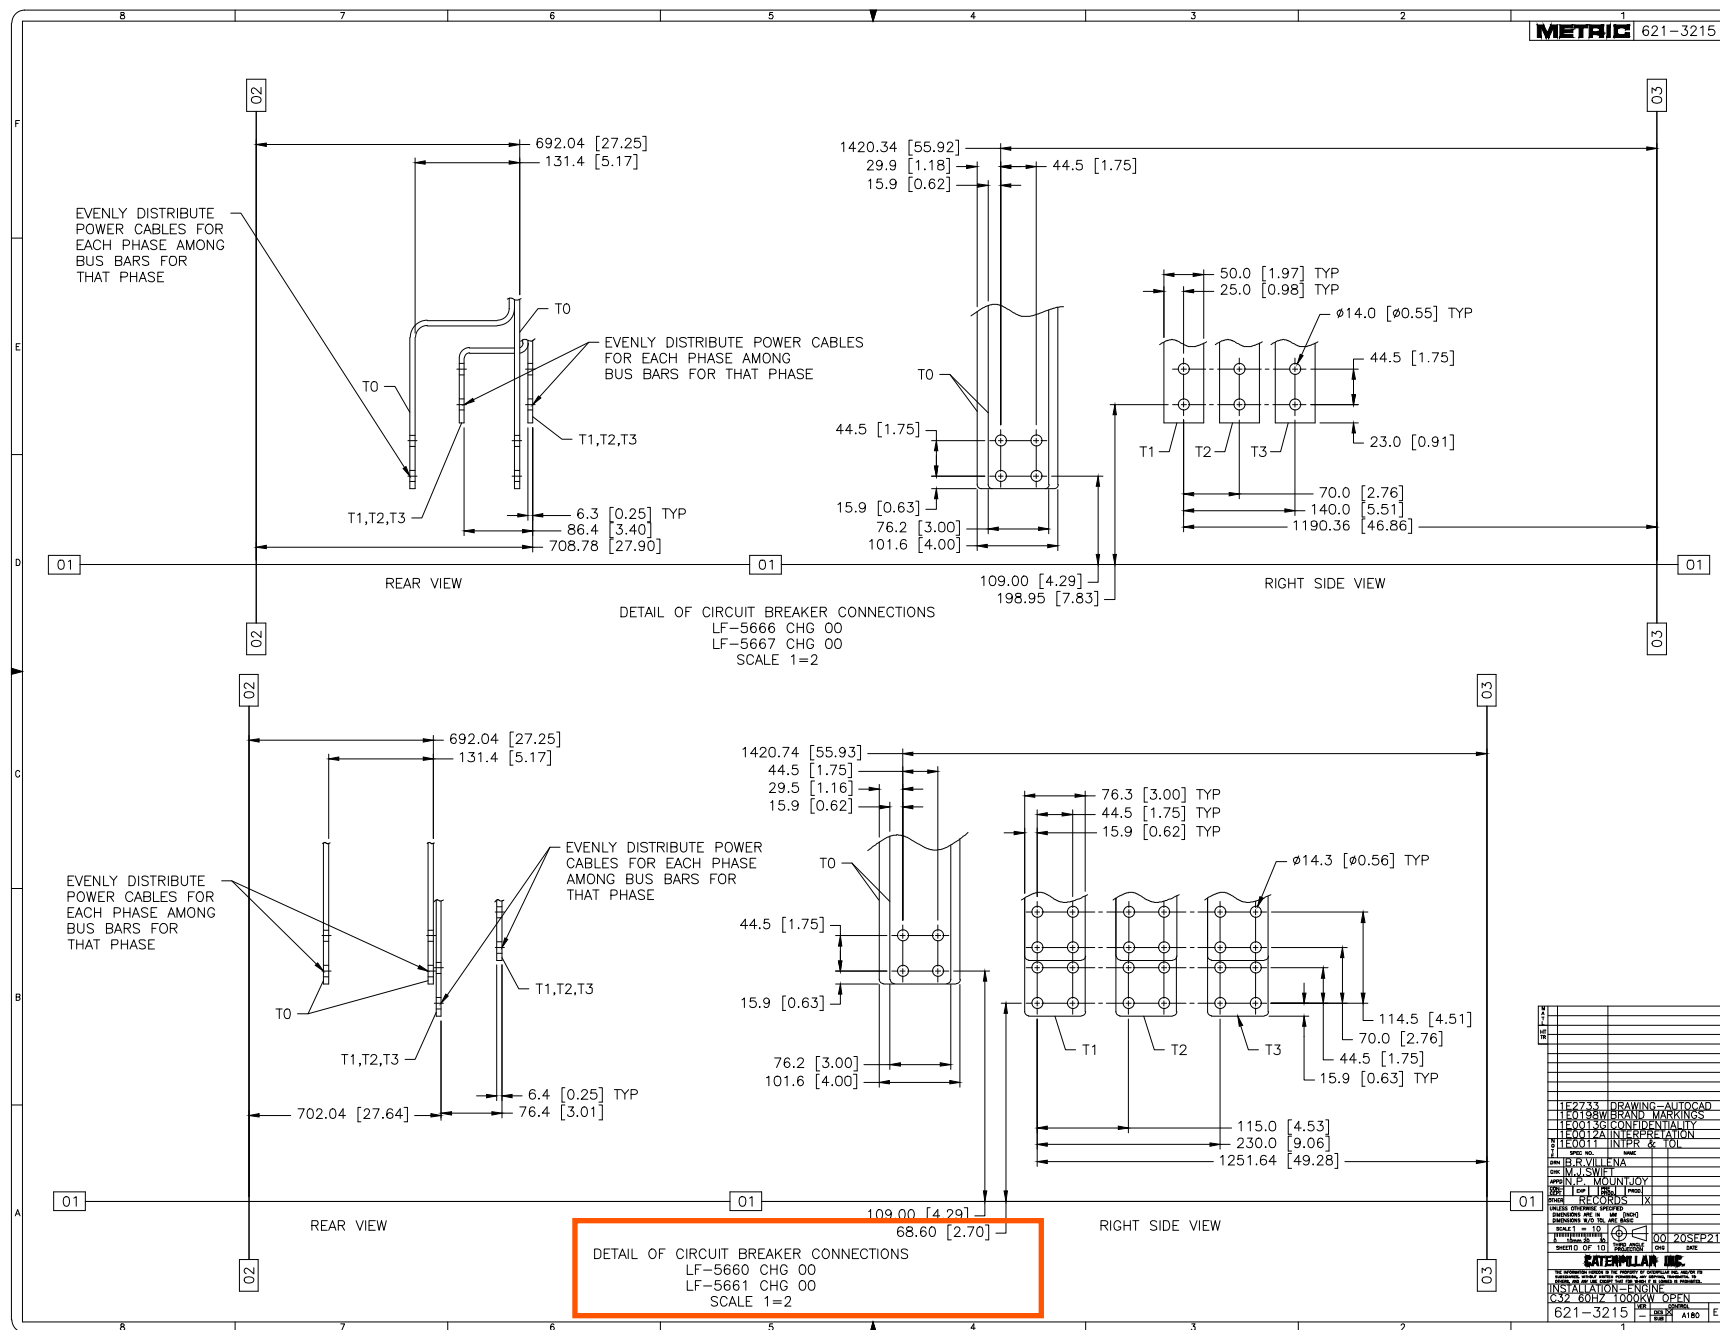




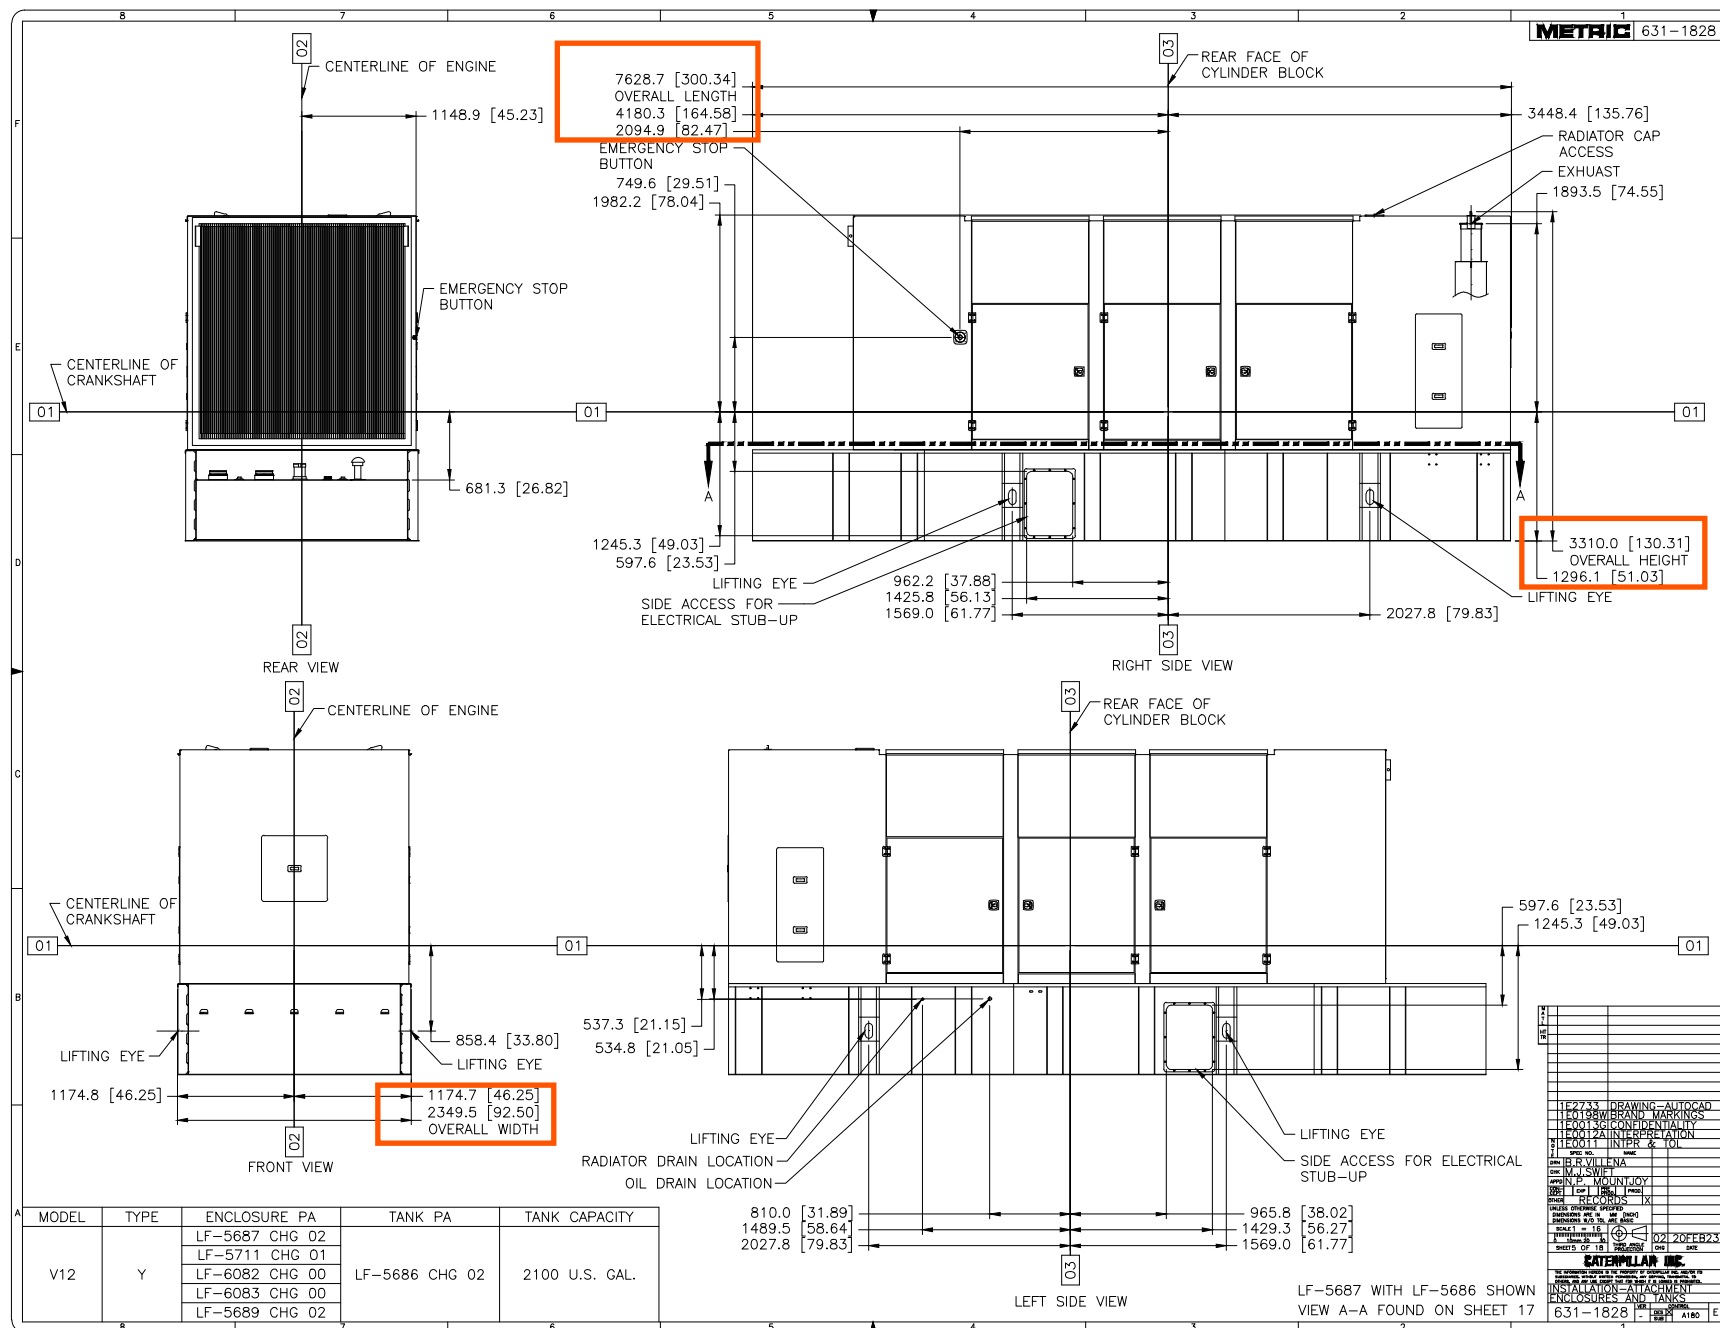


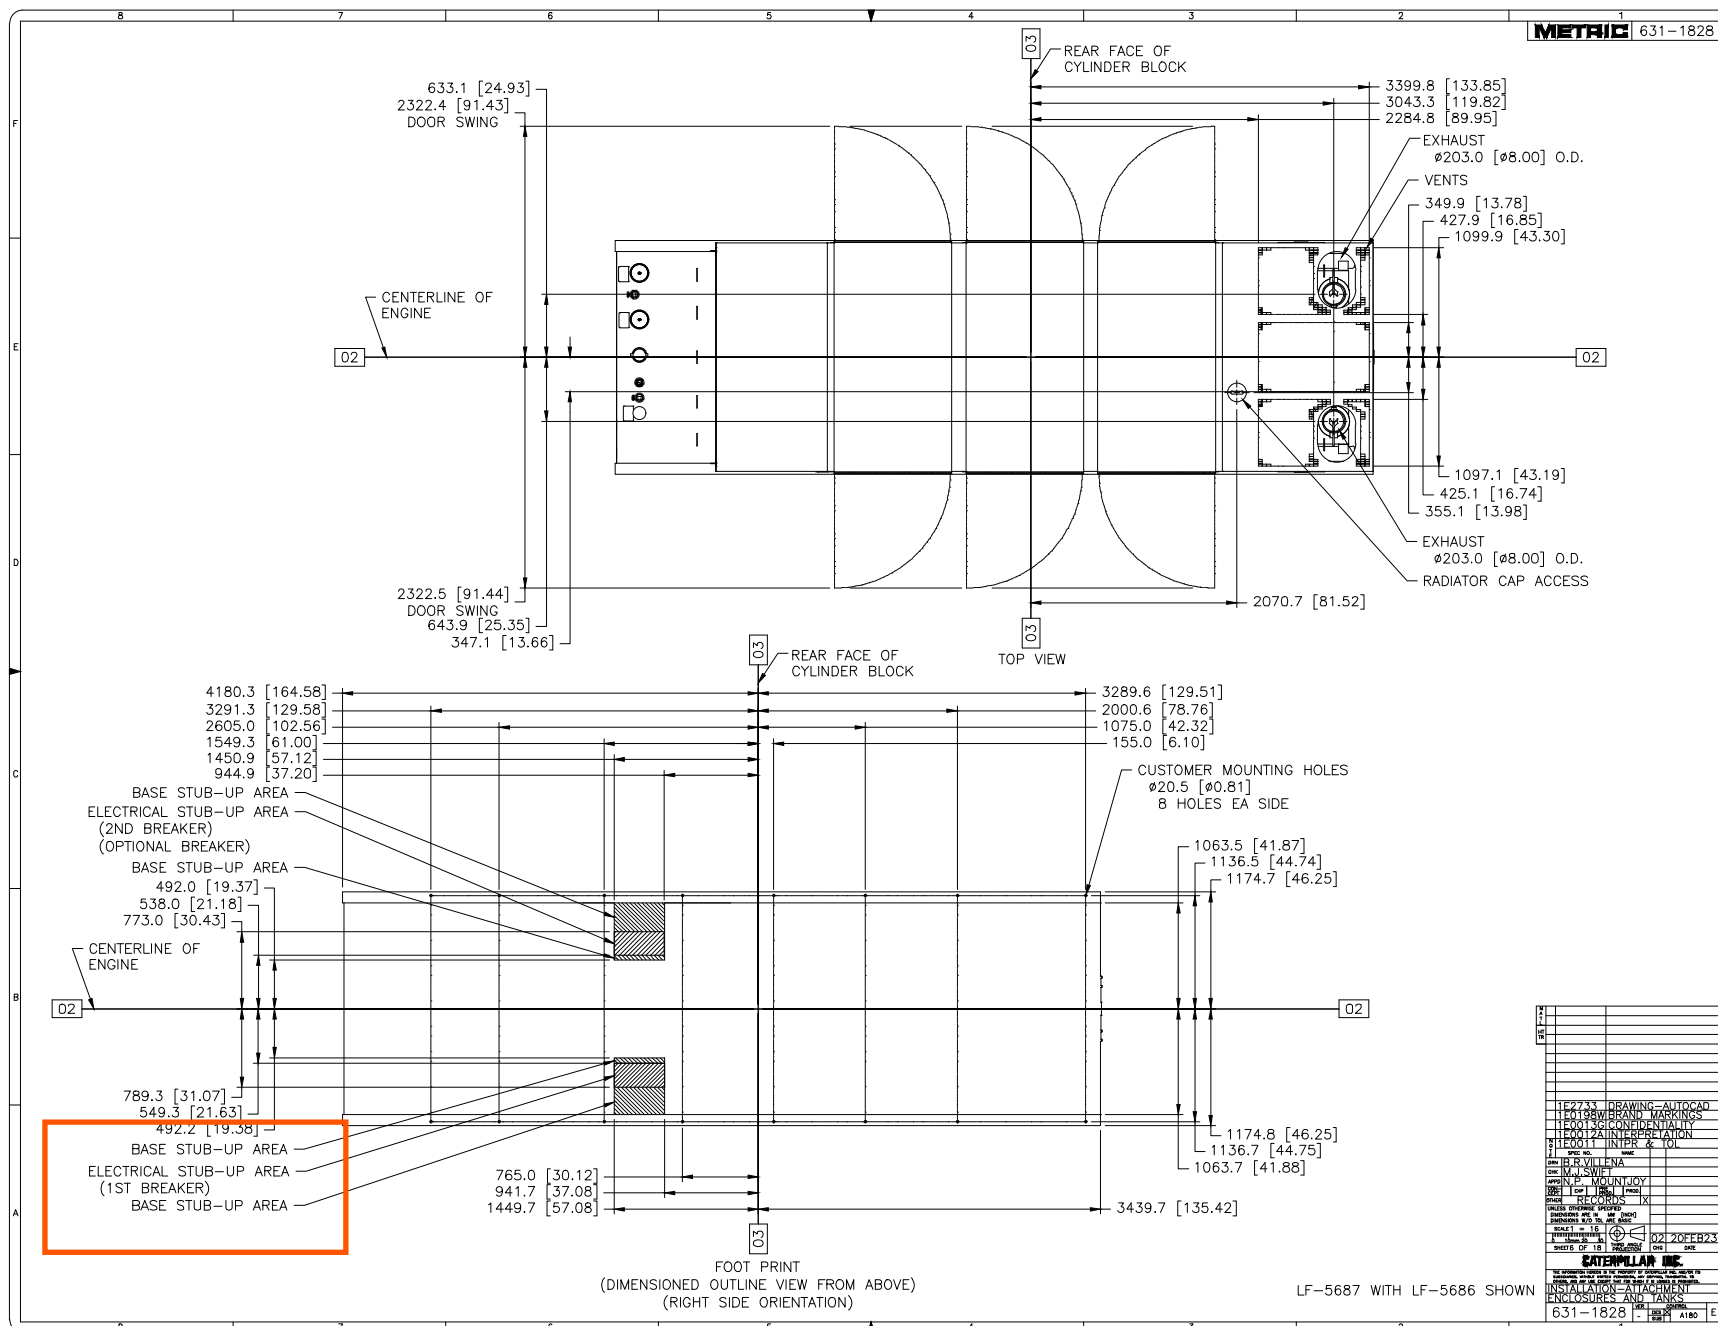

127731	DRAWING	AUTOCAD
120138	BRAND	WORKINGS
120013	CONFIDENTIALITY	
120012	TRAINING	OPERATION
120011	INTER	2.04
120010	INTER	2.04
120009	INTER	2.04
120008	INTER	2.04
120007	INTER	2.04
120006	INTER	2.04
120005	INTER	2.04
120004	INTER	2.04
120003	INTER	2.04
120002	INTER	2.04
120001	INTER	2.04
120000	INTER	2.04
119999	INTER	2.04
119998	INTER	2.04
119997	INTER	2.04
119996	INTER	2.04
119995	INTER	2.04
119994	INTER	2.04
119993	INTER	2.04
119992	INTER	2.04
119991	INTER	2.04
119990	INTER	2.04
119989	INTER	2.04
119988	INTER	2.04
119987	INTER	2.04
119986	INTER	2.04
119985	INTER	2.04
119984	INTER	2.04
119983	INTER	2.04
119982	INTER	2.04
119981	INTER	2.04
119980	INTER	2.04
119979	INTER	2.04
119978	INTER	2.04
119977	INTER	2.04
119976	INTER	2.04
119975	INTER	2.04
119974	INTER	2.04
119973	INTER	2.04
119972	INTER	2.04
119971	INTER	2.04
119970	INTER	2.04
119969	INTER	2.04
119968	INTER	2.04
119967	INTER	2.04
119966	INTER	2.04
119965	INTER	2.04
119964	INTER	2.04
119963	INTER	2.04
119962	INTER	2.04
119961	INTER	2.04
119960	INTER	2.04
119959	INTER	2.04
119958	INTER	2.04
119957	INTER	2.04
119956	INTER	2.04
119955	INTER	2.04
119954	INTER	2.04
119953	INTER	2.04
119952	INTER	2.04
119951	INTER	2.04
119950	INTER	2.04
119949	INTER	2.04
119948	INTER	2.04
119947	INTER	2.04
119946	INTER	2.04
119945	INTER	2.04
119944	INTER	2.04
119943	INTER	2.04
119942	INTER	2.04
119941	INTER	2.04
119940	INTER	2.04
119939	INTER	2.04
119938	INTER	2.04
119937	INTER	2.04
119936	INTER	2.04
119935	INTER	2.04
119934	INTER	2.04
119933	INTER	2.04
119932	INTER	2.04
119931	INTER	2.04
119930	INTER	2.04
119929	INTER	2.04
119928	INTER	2.04
119927	INTER	2.04
119926	INTER	2.04
119925	INTER	2.04
119924	INTER	2.04
119923	INTER	2.04
119922	INTER	2.04
119921	INTER	2.04
119920	INTER	2.04
119919	INTER	2.04
119918	INTER	2.04
119917	INTER	2.04
119916	INTER	2.04
119915	INTER	2.04
119914	INTER	2.04
119913	INTER	2.04
119912	INTER	2.04
119911	INTER	2.04
119910	INTER	2.04
119909	INTER	2.04
119908	INTER	2.04
119907	INTER	2.04
119906	INTER	2.04
119905	INTER	2.04
119904	INTER	2.04
119903	INTER	2.04
119902	INTER	2.04
119901	INTER	2.04
119900	INTER	2.04
119899	INTER	2.04
119898	INTER	2.04
119897	INTER	2.04
119896	INTER	2.04
119895	INTER	2.04
119894	INTER	2.04
119893	INTER	2.04
119892	INTER	2.04
119891	INTER	2.04
119890	INTER	2.04
119889	INTER	2.04
119888	INTER	2.04
119887	INTER	2.04
119886	INTER	2.04
119885	INTER	2.04
119884	INTER	2.04
119883	INTER	2.04
119882	INTER	2.04
119881	INTER	2.04
119880	INTER	2.04
119879	INTER	2.04
119878	INTER	2.04
119877	INTER	2.04
119876	INTER	2.04
119875	INTER	2.04
119874	INTER	2.04
119873	INTER	2.04
119872	INTER	2.04
119871	INTER	2.04
119870	INTER	2.04
119869	INTER	2.04
119868	INTER	2.04
119867	INTER	2.04
119866	INTER	2.04
119865	INTER	2.04
119864	INTER	2.04
119863	INTER	2.04
119862	INTER	2.04
119861	INTER	2.04
119860	INTER	2.04
119859	INTER	2.04
119858	INTER	2.04
119857	INTER	2.04
119856	INTER	2.04
119855	INTER	2.04
119854	INTER	2.04
119853	INTER	2.04
119852	INTER	2.04
119851	INTER	2.04
119850	INTER	2.04
119849	INTER	2.04
119848	INTER	2.04
119847	INTER	2.04
119846	INTER	2.04
119845	INTER	2.04
119844	INTER	2.04
119843	INTER	2.04
119842	INTER	2.04
119841	INTER	2.04
119840	INTER	2.04
119839	INTER	2.04
119838	INTER	2.04
119837	INTER	2.04
119836	INTER	2.04
119835	INTER	2.04
119834	INTER	2.04
119833	INTER	2.04
119832	INTER	2.04
119831	INTER	2.04
119830	INTER	2.04
119829	INTER	2.04
119828	INTER	2.04
119827	INTER	2.04
119826	INTER	2.04
119825	INTER	2.04
119824	INTER	2.04
119823	INTER	2.04
119822	INTER	2.04
119821	INTER	2.04
119820	INTER	2.04
119819	INTER	2.04
119818	INTER	2.04
119817	INTER	2.04
119816	INTER	2.04
119815	INTER	2.04
119814	INTER	2.04
119813	INTER	2.04
119812	INTER	2.04
119811	INTER	2.04
119810	INTER	2.04
119809	INTER	2.04
119808	INTER	2.04
119807	INTER	2.04
119806	INTER	2.04
119805	INTER	2.04
119804	INTER	2.04
119803	INTER	2.04
119802	INTER	2.04
119801	INTER	2.04
119800	INTER	2.04
119799	INTER	2.04
119798	INTER	2.04
119797	INTER	2.04
119796	INTER	2.04
119795	INTER	2.04
119794	INTER	2.04
119793	INTER	2.04
119792	INTER	2.04
119791	INTER	2.04
119790	INTER	2.04
119789	INTER	2.04
119788	INTER	2.04
119787	INTER	2.04
119786	INTER	2.04
119785	INTER	2.04
119784	INTER	2.04
119783	INTER	2.04
119782	INTER	2.04
119781	INTER	2.04
119780	INTER	2.04
119779	INTER	2.04
119778	INTER	2.04
119777	INTER	2.04
119776	INTER	2.04
119775	INTER	2.04
119774	INTER	2.04
119773	INTER	2.04
119772	INTER	2.04
119771	INTER	2.04
119770	INTER	2.04
119769	INTER	2.04
119768	INTER	2.04
119767	INTER	2.04
119766	INTER	2.04
119765	INTER	2.04
119764	INTER	2.04
119763	INTER	2.04
119762	INTER	2.04
119761	INTER	2.04
119760	INTER	2.04
119759	INTER	2.04
119758	INTER	2.04
119757	INTER	2.04
119756	INTER	2.04
119755	INTER	2.04
119754	INTER	2.04
119753	INTER	2.04
119752	INTER	2.04
119751	INTER	2.04
119750	INTER	2.04
119749	INTER	2.04
119748	INTER	2.04
119747	INTER	2.04
119746	INTER	2.04
119745	INTER	2.04
119744	INTER	2.04
119743	INTER	2.04
119742	INTER	2.04
119741	INTER	2.04
119740	INTER	2.04
119739	INTER	2.04
119738	INTER	2.04
119737	INTER	2.04
119736	INTER	2.04
119735	INTER	2.04
119734	INTER	2.04
119733	INTER	2.04
119732	INTER	2.04
119731	INTER	2.04
119730	INTER	2.04
119729	INTER	2.04
119728	INTER	2.04
119727	INTER	2.04
119726	INTER	2.04
119725	INTER	2.04
119724	INTER	2.04
119723	INTER	2.04
119722	INTER	2.04
119721	INTER	2.04
119720	INTER	2.04
119719	INTER	2.04
119718	INTER	2.04
119717	INTER	2.04
119716	INTER	2.04
119715	INTER	2.04
119714	INTER	2.04
119713	INTER	2.04
119712	INTER	2.04
119711	INTER	2.04
119710	INTER	2.04
119709	INTER	2.04
119708	INTER	2.04
119707	INTER	2.04
119706	INTER	2.04
119705	INTER	2.04
119704	INTER	2.04
119703	INTER	2.04
119702	INTER	2.04
119701	INTER	2.04
119700	INTER	2.04
119699	INTER	2.04
119698	INTER	2.04
119697	INTER	2.04
119696	INTER	2.04
119695	INTER	2.04
119694	INTER	2.04
119693	INTER	2.04
119692	INTER	2.04
119691	INTER	2.04
119690	INTER	2.04
119689	INTER	2.04
119688	INTER	2.04
119687	INTER	2.04
119686	INTER	2.04
119685	INTER	2.04
119684	INTER	2.04
119683	INTER	2.04
119682	INTER	2.04
119681	INTER	2.04
119680	INTER	2.04
119679	INTER	2.04
119678	INTER	2.04
119677	INTER	2.04
119676	INTER	2.04
119675	INTER	2.04
119674	INTER	2.04
119673	INTER	2.04
119672	INTER	2.04
119671	INTER	2.04
119670	INTER	2.04
119669	INTER	2.04
119668	INTER	2.04
119667	INTER	2.04
119666	INTER	2.04
119665	INTER</	



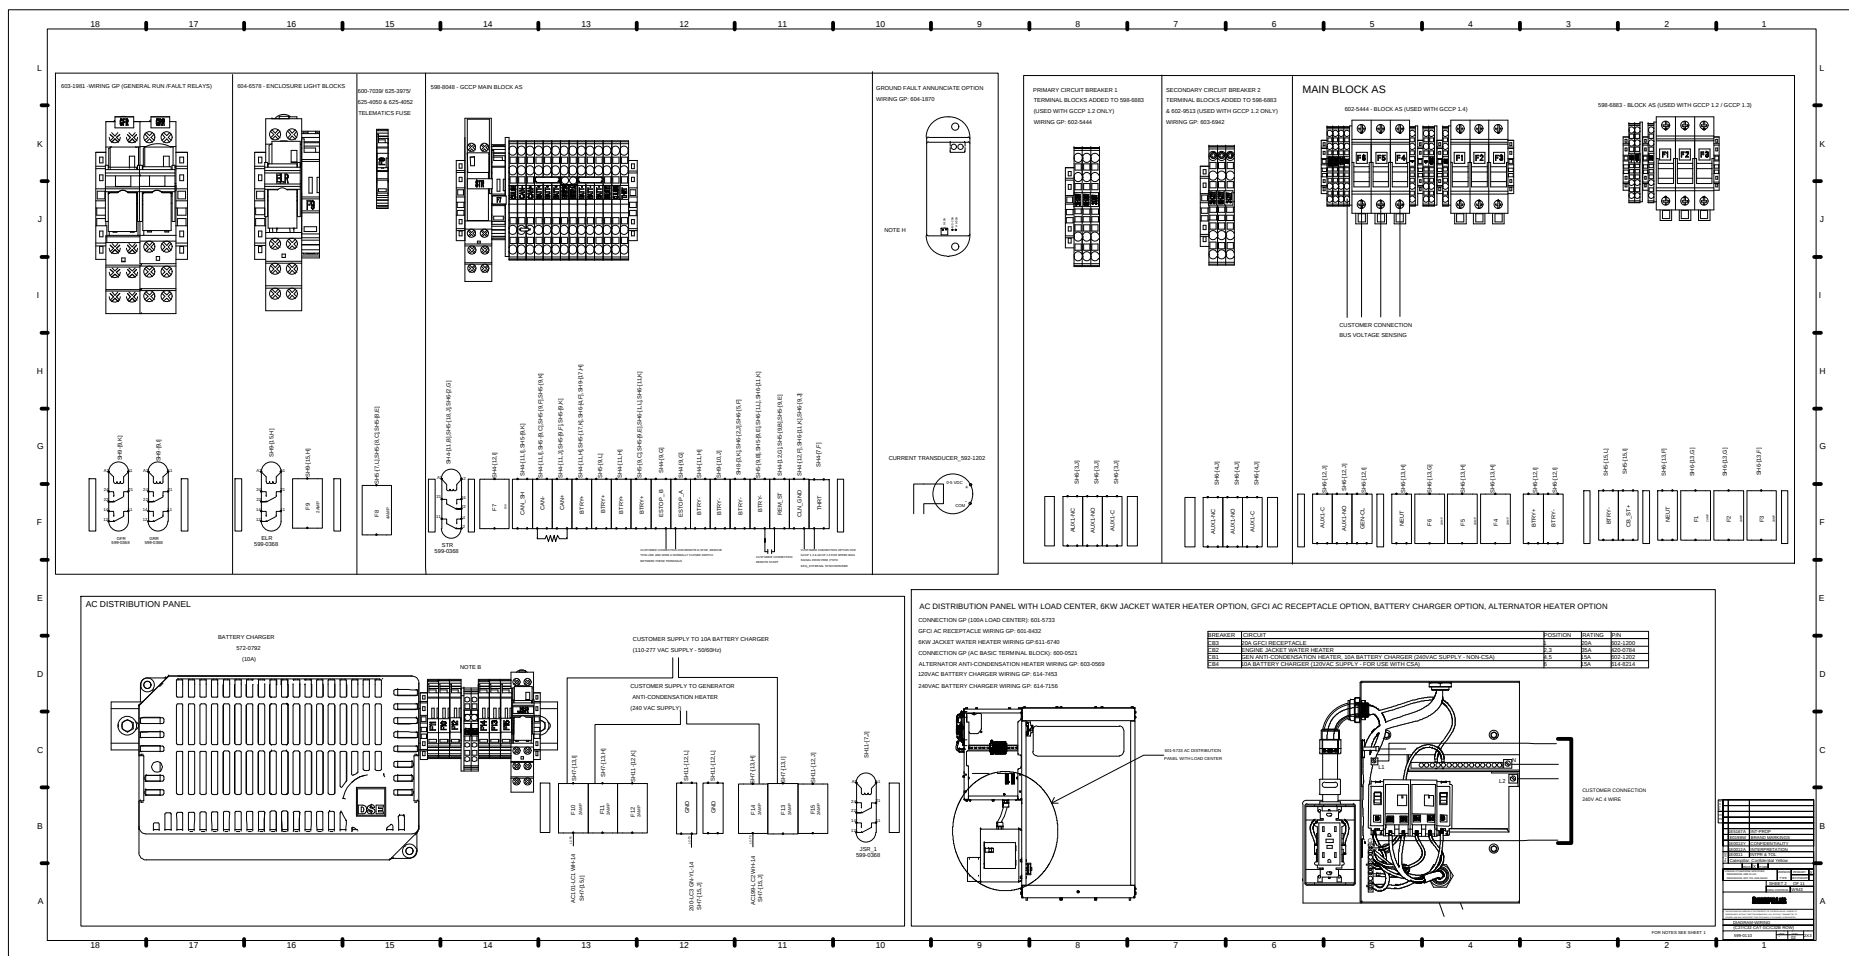


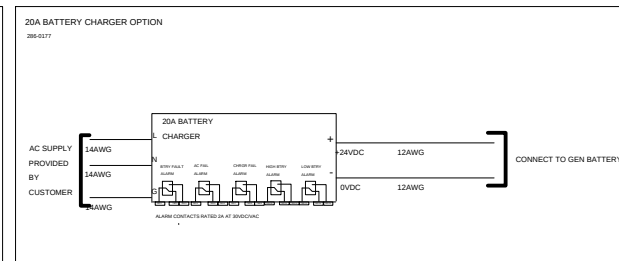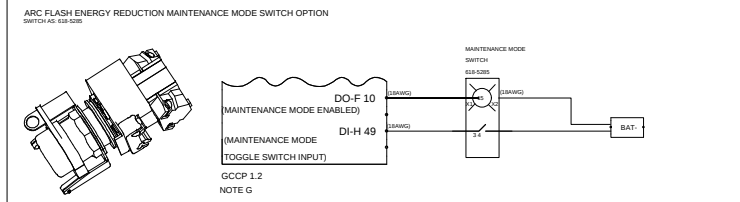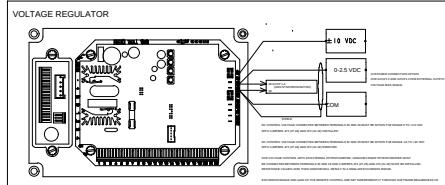


FOR NOTES, SEE SHEET

CONTROL GP: 525-8045
CONTROL GP: 502-5455
CONTROL GP: 506-3823








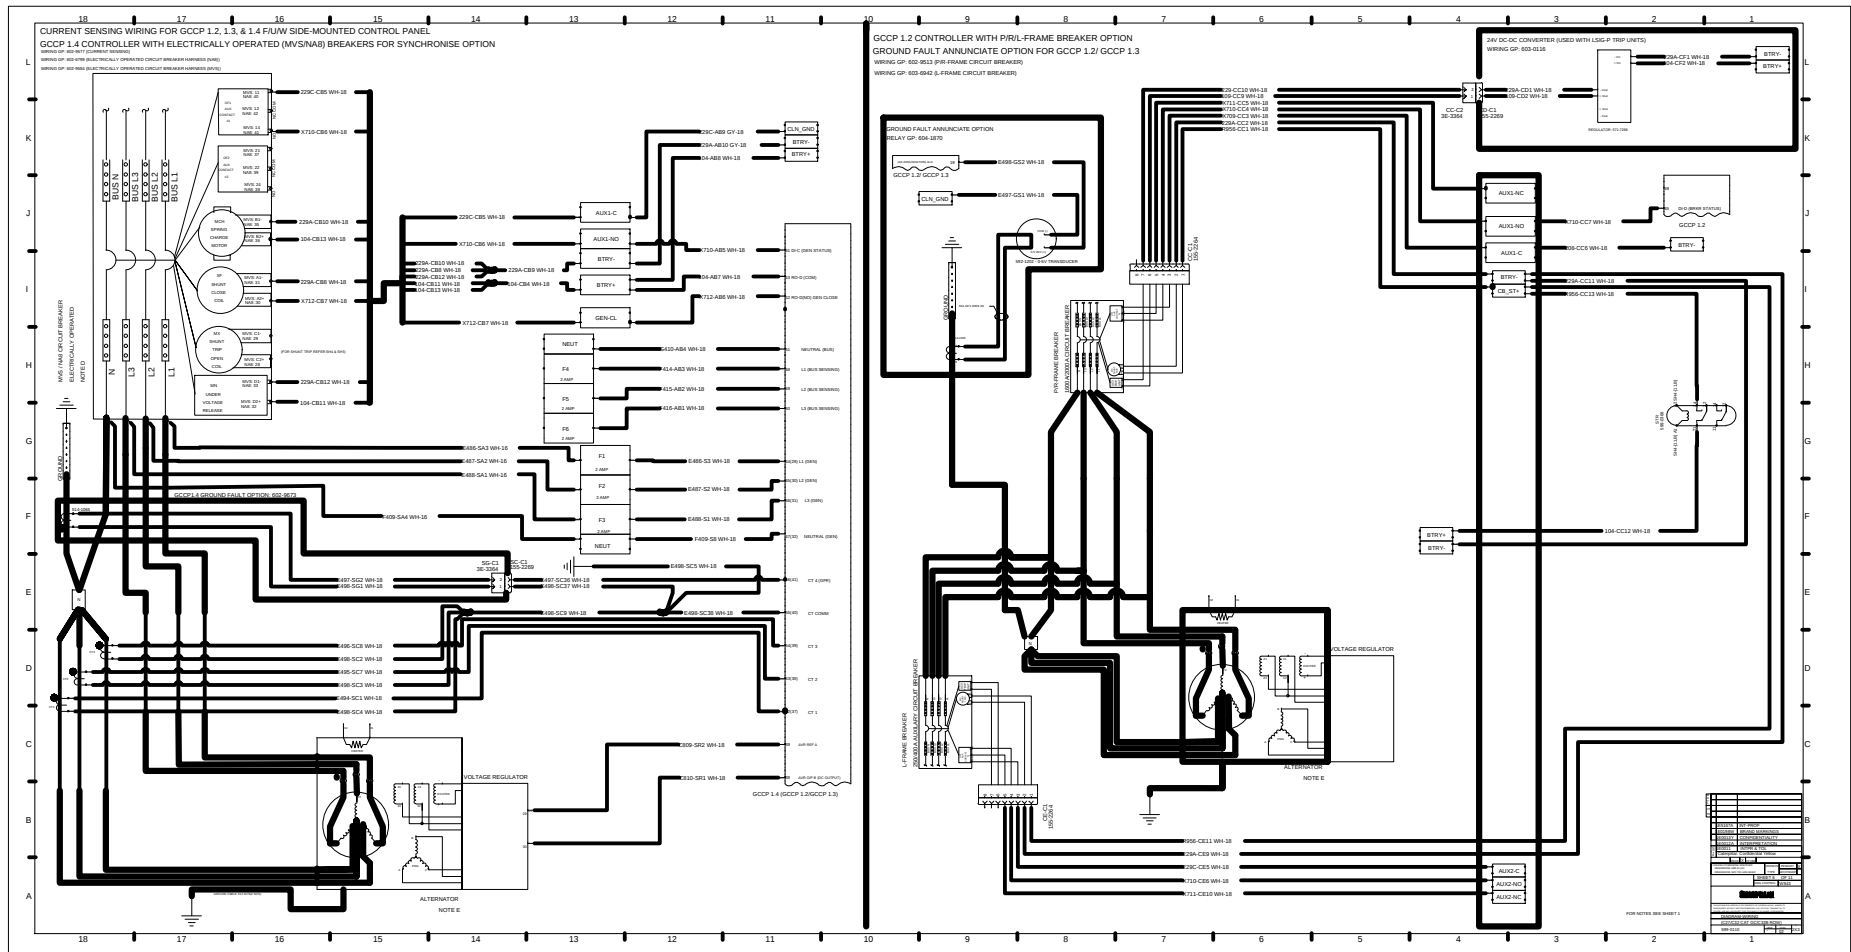

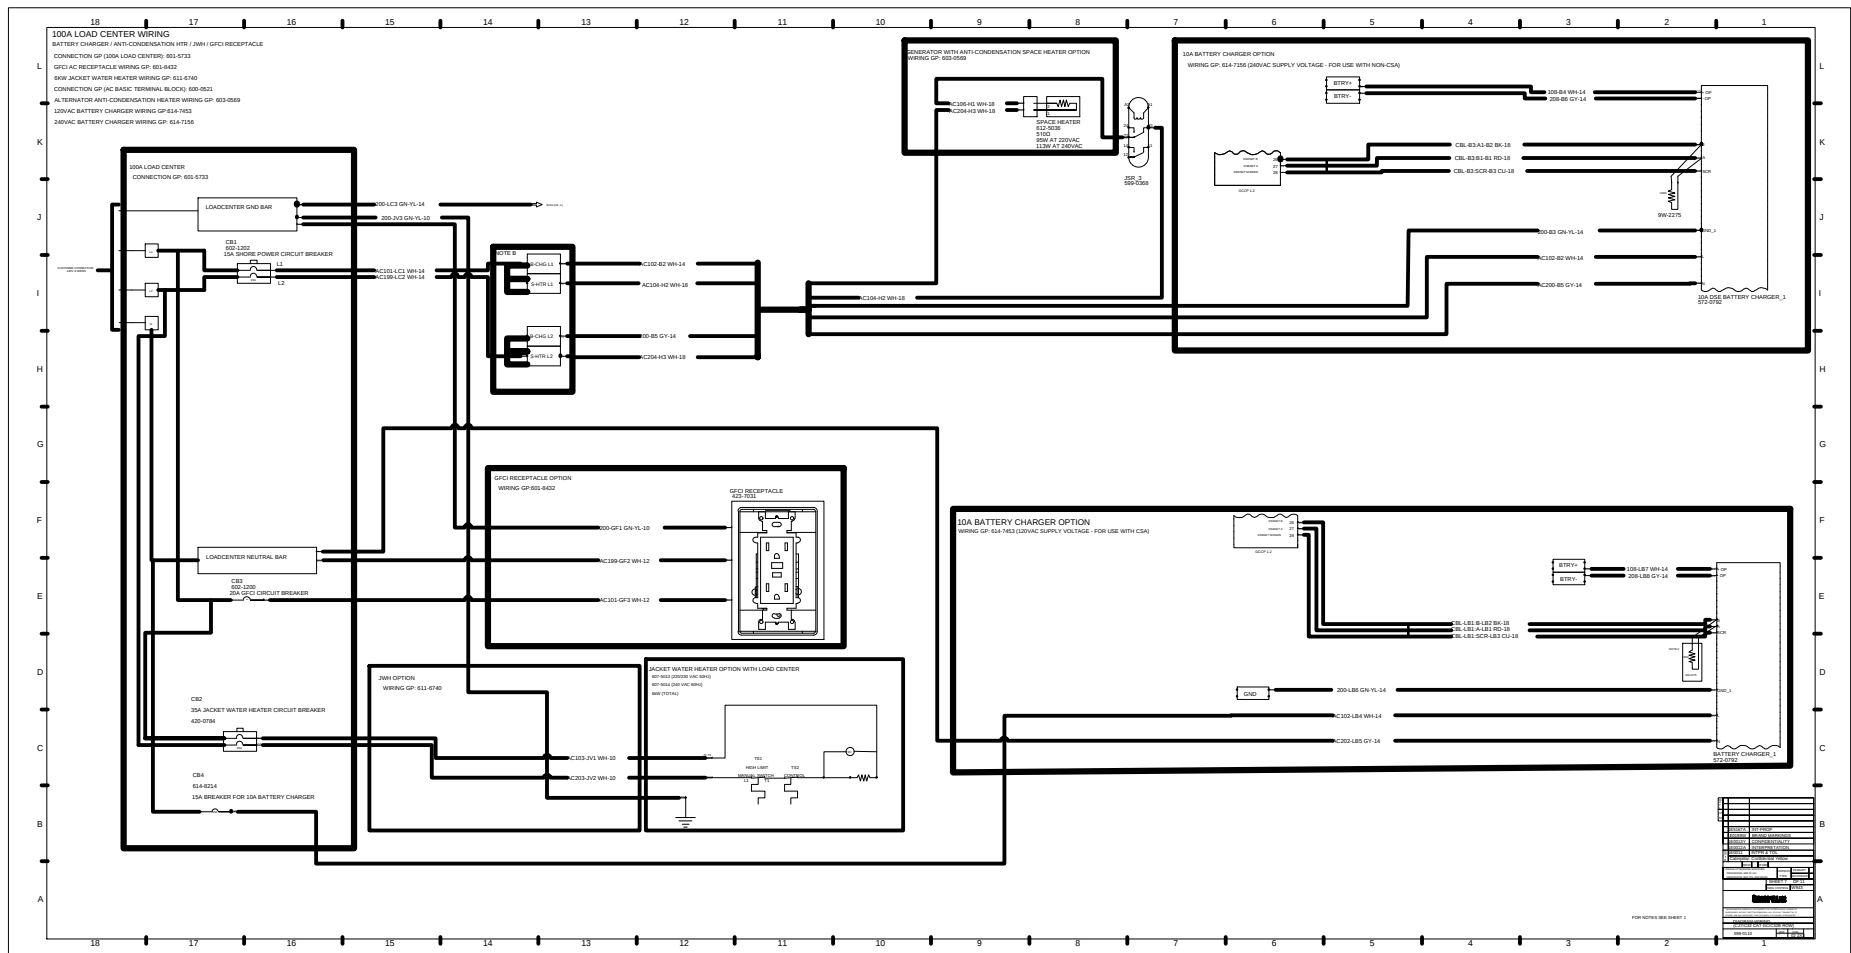

AC SHORE POWER WIRING (NO LOAD CENTER) - BATTERY CHARGER / ANTI-CONDENSATION HTR / JWH





CONNECTION GP (AC BASIC TERMINAL BLOCK): 600-0521
 BATTERY CHARGER WIRING GP: 599-2063
 ANTI-CONDENSATION HTR WIRING GP: 600-1103

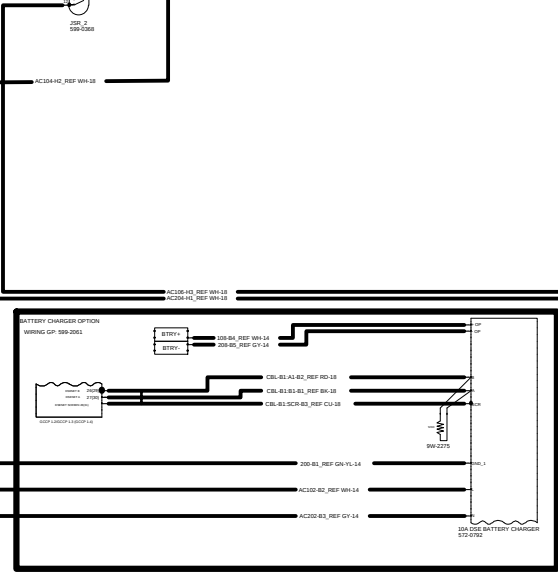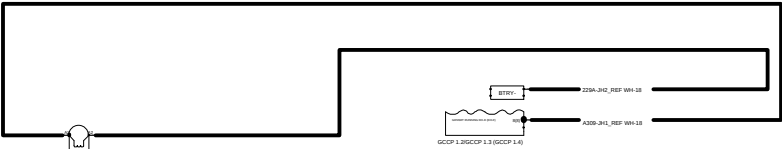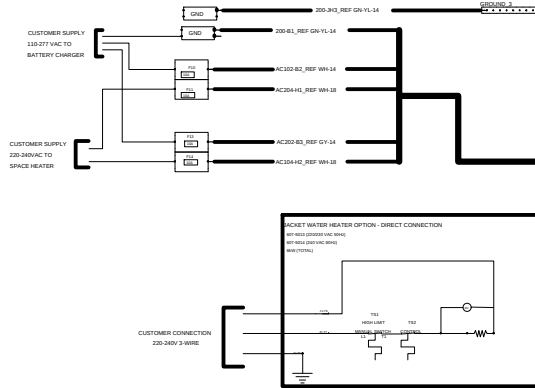

NO.	DESCRIPTION	DATE	BY	CHKD
1	ISSUED FOR CONSTRUCTION	01/15/14	JWH	
2	REVISION			
3	REVISION			
4	REVISION			
5	REVISION			
6	REVISION			
7	REVISION			
8	REVISION			
9	REVISION			
10	REVISION			
11	REVISION			
12	REVISION			
13	REVISION			
14	REVISION			
15	REVISION			
16	REVISION			
17	REVISION			
18	REVISION			


FOR NOTES SEE SHEET 1

ADDITIONAL OPTIONS

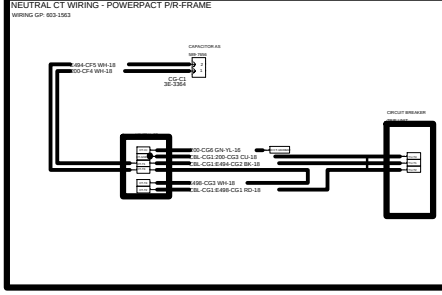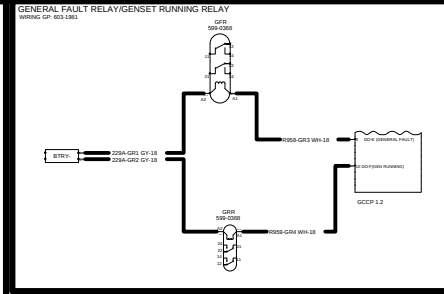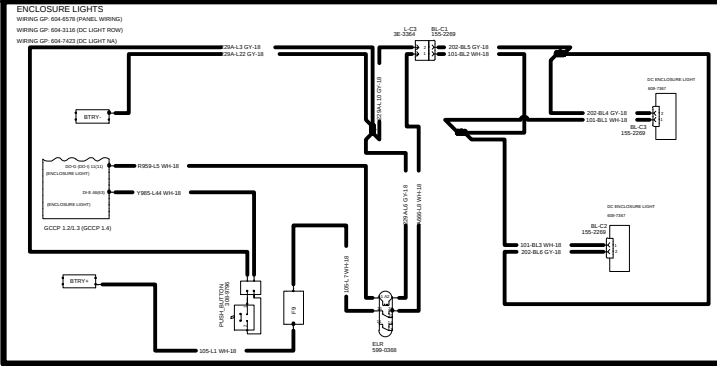

NO.	DESCRIPTION	QTY	UNIT	PRICE	TOTAL
1	ENCLOSURE LIGHTS	1	EA	100.00	100.00
2	GENERAL FAULT RELAY/GENSET RUNNING RELAY	1	EA	150.00	150.00
3	REMOTE ANNUNCIATOR	1	EA	75.00	75.00
4	NEUTRAL CT WIRING - POWERPACT PIR-FRAME	1	EA	50.00	50.00
5	ENCLOSURE LIGHTS	1	EA	100.00	100.00
6	GENERAL FAULT RELAY/GENSET RUNNING RELAY	1	EA	150.00	150.00
7	REMOTE ANNUNCIATOR	1	EA	75.00	75.00
8	NEUTRAL CT WIRING - POWERPACT PIR-FRAME	1	EA	50.00	50.00
9	ENCLOSURE LIGHTS	1	EA	100.00	100.00
10	GENERAL FAULT RELAY/GENSET RUNNING RELAY	1	EA	150.00	150.00
11	REMOTE ANNUNCIATOR	1	EA	75.00	75.00
12	NEUTRAL CT WIRING - POWERPACT PIR-FRAME	1	EA	50.00	50.00
13	ENCLOSURE LIGHTS	1	EA	100.00	100.00
14	GENERAL FAULT RELAY/GENSET RUNNING RELAY	1	EA	150.00	150.00
15	REMOTE ANNUNCIATOR	1	EA	75.00	75.00
16	NEUTRAL CT WIRING - POWERPACT PIR-FRAME	1	EA	50.00	50.00
17	ENCLOSURE LIGHTS	1	EA	100.00	100.00
18	GENERAL FAULT RELAY/GENSET RUNNING RELAY	1	EA	150.00	150.00
19	REMOTE ANNUNCIATOR	1	EA	75.00	75.00
20	NEUTRAL CT WIRING - POWERPACT PIR-FRAME	1	EA	50.00	50.00

FOR NOTES SEE SHEET 1

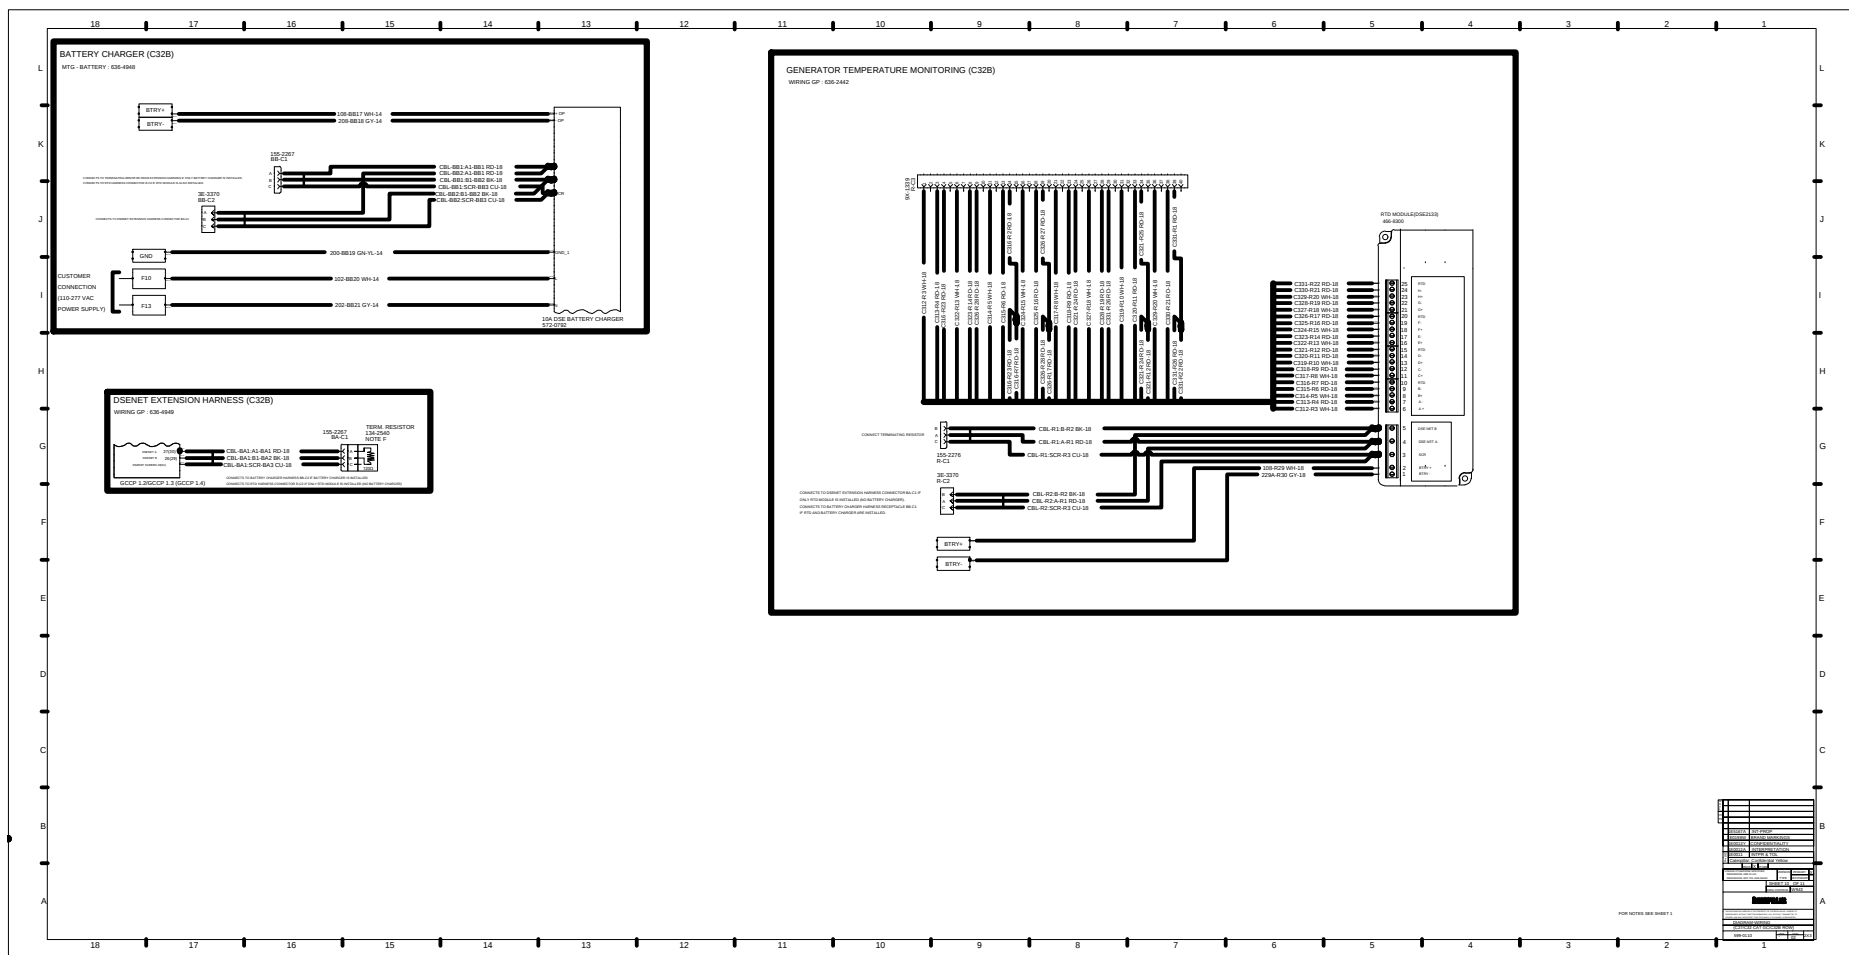

Yancey Power Systems
259 Lee Industrial Blvd.
Austell, GA 30168-7406
770.941.2424 tel
770.941.2411 fax
877.278.6235 toll free
www.YanceyPower.com

Generator Accessories



L Frame



P Frame



R Frame

Molded Case Circuit Breakers

C27 – C32 North America built packages (60 Hz)

L-Frame
250A-400A (UL)

P-Frame
1200A (UL)

R-Frame
1600-2000A (UL)

Features

Design Specifications:

- 100% rated breakers
- Moisture and fungus protection
- Clear indication of breaker status
- Reinforced insulation
- Shunt trip
- Auxiliary contacts
- Load side extension bars
- Maintenance-free operation
- Exceptional characteristics under short-circuit conditions
- Adjustable trip settings

L-Frame

UL 489
CSA 22.2 No 5
Federal Specification W-C-375B/GEN
NEMA AB1
NMX J-266 CCC
CE Marking

P-Frame & R-Frame

UL 489
CSA 22.2 No 5-02
Federal Specification W-C-375B/GEN
NEMA AB1
NMX J-266

Standard Features

Standards

- UL-CSA
 - o L-Frame
 - o P-Frame
 - o R-Frame

Shunt trip

- The shunt trip provides a means of tripping the circuit breaker electronically
- Shunt trip ratings
 - o Voltage: 24VDC
 - o Coil Burden (Holding/Inrush): 4.5/200 VA
 - o Power Consumption: 4.5 VA

Auxiliary contacts

The auxiliary contacts provide a means of remote circuit breaker position indication and consists of (1) Form C Contact (1 Normally open and 1 Normally closed contact) with the following current ratings:

6A @ 240-480 VAC, 50/60 Hz

Trip units

All circuit breakers come equipped with True RMS Current Sensing.

The trip units for each of the circuit breaker ratings sample the current waveform to provide true RMS protection through the 15th harmonic. This true RMS sensing gives accurate values for the magnitude of a nonsinusoidal waveform.

Therefore, the heating effects of harmonically distorted waveforms are accurately evaluated. The trip system comes equipped with a set of current transformers (CT's) to sense current, a trip unit to evaluate the current, and a tripping solenoid to trip the circuit breaker.

Additionally, each trip unit comes equipped with Active Thermal Imaging which is active 20 minutes before and after tripping.

Customer cable connections

Extension bus bars or mechanical lugs are provided for installation of load cables.

Cat® Part Number	Frame and Rating (Amps)	IEC/UL	No. Poles	Operation	Trip Unit	Circuit Breaker Characteristics	Options	Instantaneous Override (kA RMS) +/- 10%
611-4994	250A L-Frame MCCB	UL	3	MO	3.3S LSI	Table 3	1 Aux Contact, Shunt Trip	—
421-3235	400A L-Frame MCCB	UL	3	MO	3.3S LSI	Table 3	1 Aux Contact, Shunt Trip	—
421-3237	400A L-Frame MCCB	UL	3	MO	6.3A LSI	Table 3	1 Aux Contact, Shunt Trip	—
244-9774	1200A P-Frame MCCB	UL	3	MO	5.0A LSI	Table 1	1 Aux Contact, Shunt Trip	24
244-9864	1600A R-Frame MCCB	UL	3	MO	5.0A LSI	Table 2	1 Aux Contact, Shunt Trip	57
244-9868	2000A R-Frame MCCB	UL	3	MO	5.0A LSI	Table 2	1 Aux Contact, Shunt Trip	57
244-9778	1200A P-Frame MCCB	UL	3	MO	6.0A LSI	Table 1	1 Aux Contact, Shunt Trip	24
244-9865	1600A R-Frame MCCB	UL	3	MO	6.0A LSI	Table 2	1 Aux Contact, Shunt Trip	57
244-9869	2000A R-Frame MCCB	UL	3	MO	6.0A LSI	Table 2	1 Aux Contact, Shunt Trip	57
244-9790	1200A P-Frame MCCB	UL	3	MO	6.0P LSI-P	Table 1	1 Aux Contact, Shunt Trip, Modbus	24
585-8063	1600A R-Frame MCCB	UL	3	MO	6.0P LSI-P	Table 2	1 Aux Contact, Shunt Trip, Modbus	57
585-8064	2000A R-Frame MCCB	UL	3	MO	6.0P LSI-P	Table 2	1 Aux Contact, Shunt Trip, Modbus	57

Note: Arc flash energy reduction maintenance mode switch kit shipped loose for 1200A breakers.

Circuit Breakers Characteristics

TABLE 1

Model		P-Frame	
Number of Poles		3	
Rated Current (Amps)		1200A (UL)	
Voltage Rating (VAC)		600UL/ 690 IEC	
Interrupt Rating (UL/CSA) (60 Hz) – kA RMS		240V	65
		480V	35
		600V	18
IEC 60947-2 Rating (50/60 Hz) – kA RMS	Icu	240V	50
		380/415V	35
	Ics	240V	25
		380/415V	20

TABLE 3


Model		L-Frame	
Number of Poles		3	
Rated Current (Amps)		250A – 400A (UL)	
Voltage Rating (VAC)		600UL/ 525 IEC	
Interrupt Rating (UL/CSA) (60 Hz) – kA RMS		240V	65
		480V	35
		600V	18
IEC 647-2 Rating (50/60 Hz) – kA RMS	Icu	240V	50
		380/415V	35
	Ics	240V	25
		380/415V	20

TABLE 2

Model		R-Frame	
Number of Poles		3	
Rated Current (Amps)		1600A – 2000A (UL)	
Voltage Rating (VAC)		600UL/ 690 IEC	
Interrupt Rating (UL/CSA) (60 Hz) – kA RMS		240V	65
		480V	35
		600V	18
IEC 60947-2 Rating (50/60 Hz) – kA RMS	Icu	240V	50
		380/415V	35
	Ics	240V	25
		380/415V	20

P, R, NS-Frame Long-Short Trip Curve and NW-Frame Long-Short Trip Curve

CURRENT IN MULTIPLES OF I_r (I_r = Long-time setting x I_n)

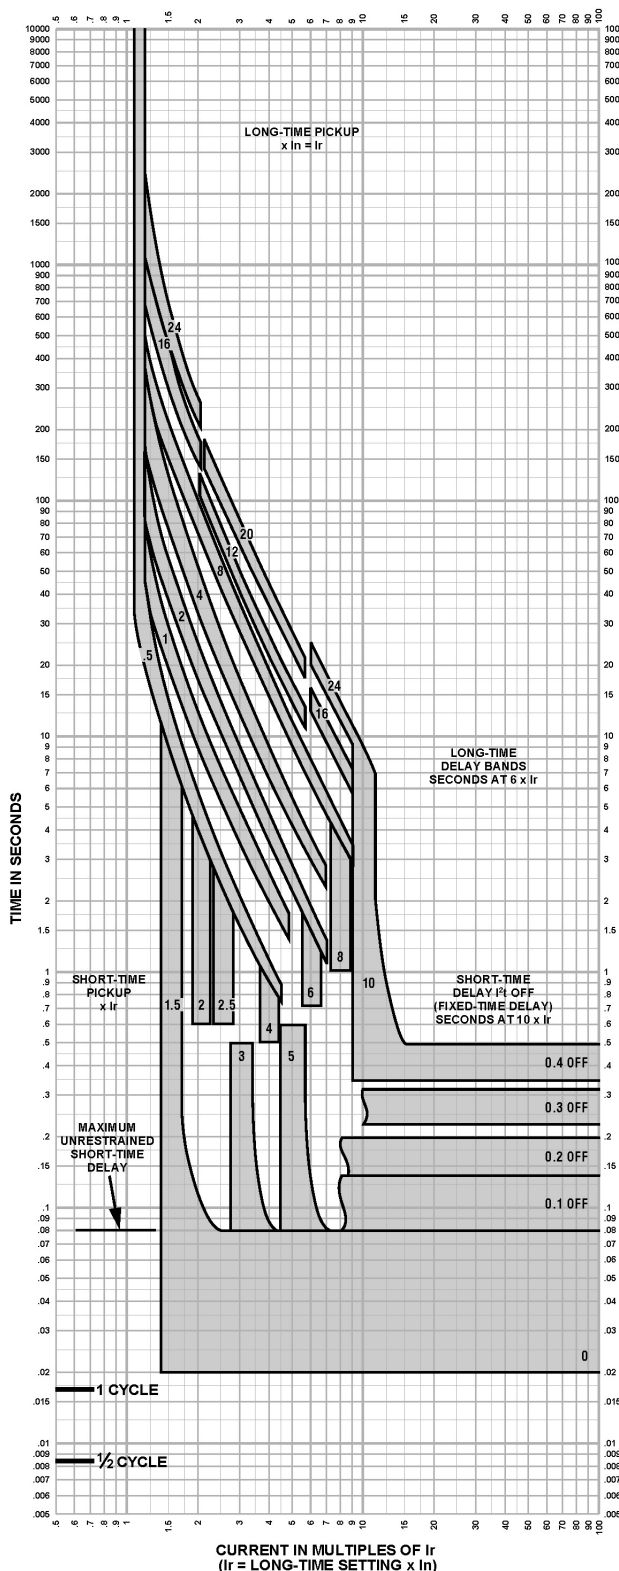

Long-time Pickup and Delay Short-time Pickup and I^2t OFF Delay


The time-current curve information is to be used for application and coordination purposes only. Curves apply from -30°C to $+60^\circ\text{C}$ ambient temperature.

Notes:

1. There is a thermal-imaging effect that can act to shorten the long-time delay. The thermalimaging effect comes into play if a current above the long-time delay pickup value exists for a time and then is cleared by the tripping of a downstream device or the circuit breaker itself. A subsequent overload will cause the circuit breaker to trip in a shorter time than normal. The amount of time delay reduction is inverse to the amount of time that has elapsed since the previous overload. Approximately 20 minutes is required between overloads to completely reset thermalimaging.
2. The end of the curve is determined by the interrupting rating of the circuit breaker.
3. With zone-selective interlocking on, short-time delay utilized and no restraining signal, the maximum unrestrained short-time delay time band applies regardless of the setting.
4. Total clearing times shown include the response times of the trip unit, the circuit breaker opening, and the extinction of the current.
5. For a withstand circuit breaker, instantaneous can be turned OFF.
6. Overload indicator illuminates at 100%.

P, R, NS-Frame Instant Curve and NW-Frame Instant Trip Curve

MULTIPLES OF SENSOR RATING (In)

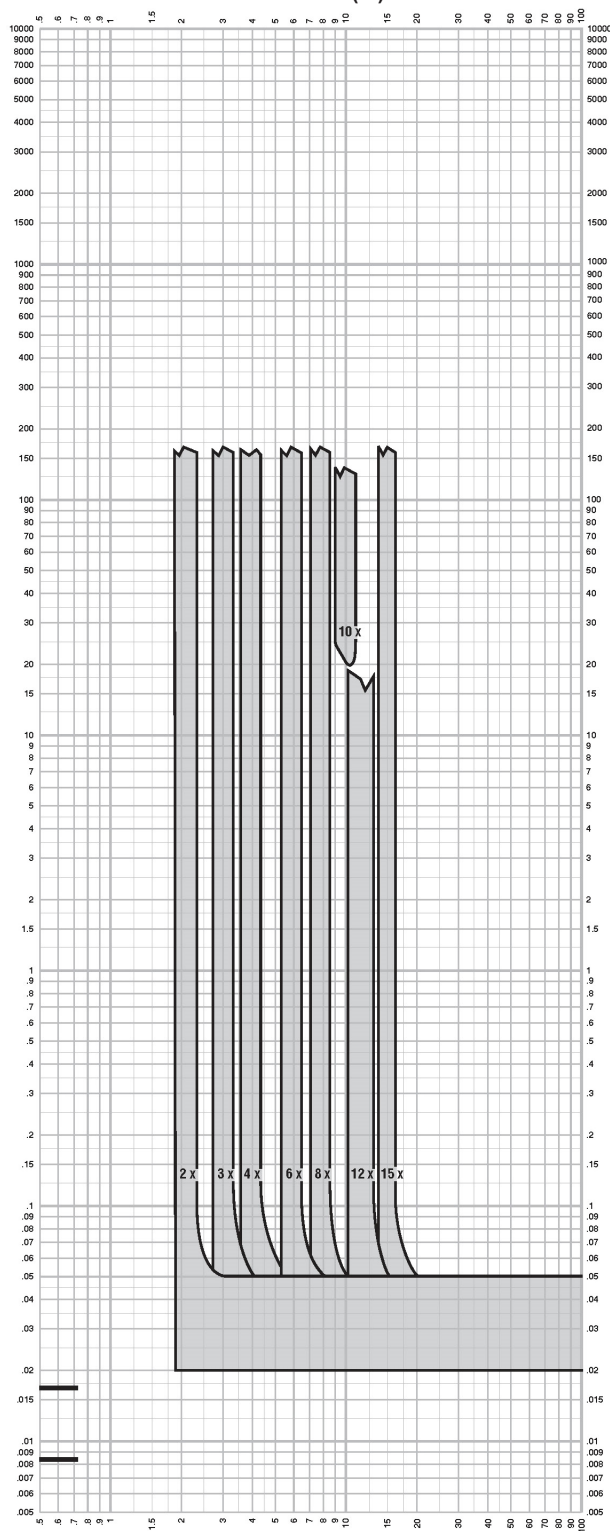

Instantaneous Pickup 2x–15x and OFF

The time-current curve information is to be used for application and coordination purposes only.


Curves apply from -30° to +60°C ambient temperature.

Notes:

1. The end of the curve is determined by the interrupting rating of the circuit breaker.
 2. Total clearing times shown include the response times of the trip unit, the circuit breaker opening, and the extinction of the current.
 3. The instantaneous region of the trip curve shows maximum total clearing times. Actual clearing times in this region can vary depending on the circuit breaker mechanism design and other factors. The actual clearing time can be considerably faster than indicated.
- Contact your local Sales Office for additional information.*
4. For a withstand circuit breaker, instantaneous can be turned OFF. \

P, R, NS-Frame Ground Curve and NW-Frame Ground Fault Trip Curve

MULTIPLES OF SENSOR RATING (I_n)

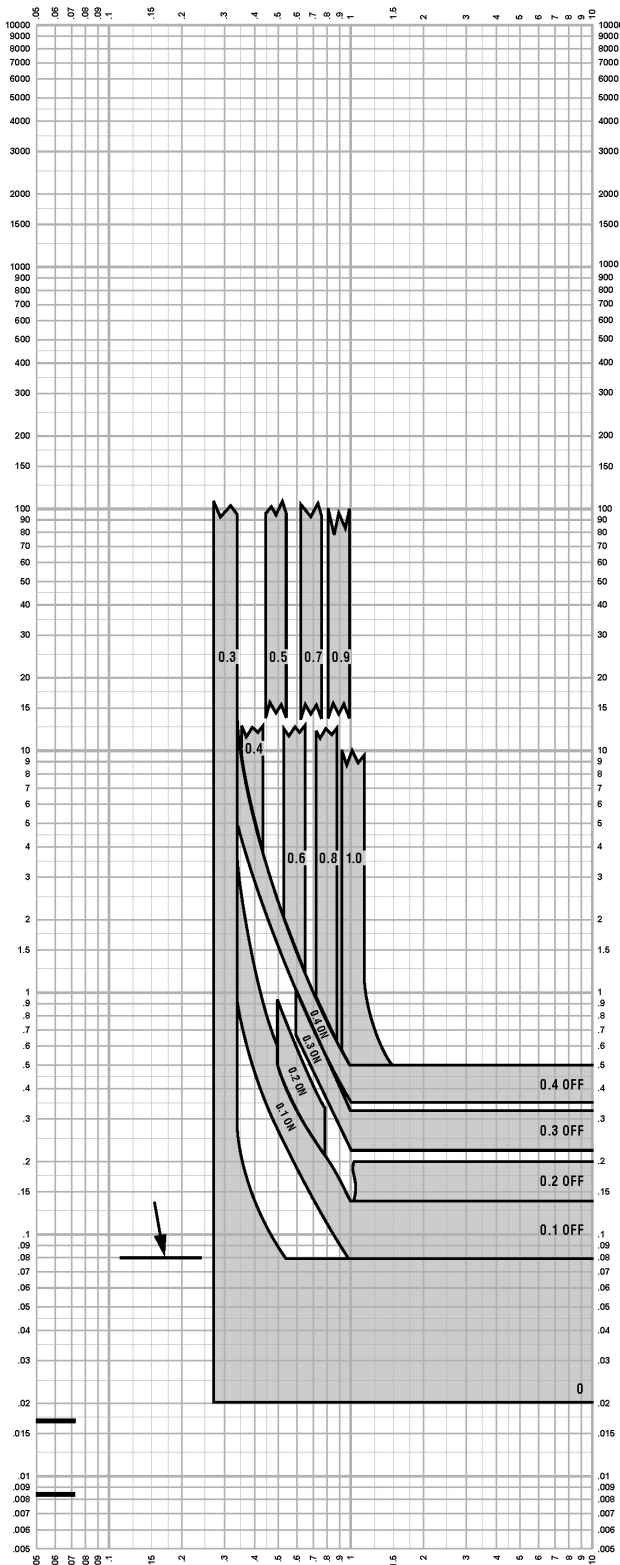

Ground-fault I^2t OFF and ON $I_n \leq 400$ A

The time-current curve information is to be used for application and coordination purposes only.

Curves apply from -30° to $+60^\circ$ C ambient temperature.

LET'S DO THE WORK.™

www.cat.com/electricpower

©2024 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice.

The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow" the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

Cat[®] Batteries



Cat Batteries — Greater Starting Power — Lower Maintenance — Longer Life

Cat Premium High Output (PHO) batteries are used in all Caterpillar Machines and Engine Gen-Sets. They are designed to meet stringent Caterpillar design specifications, which provide industry leading cold cranking amp (CCA) capability and maximum vibration resistance.

Maintenance Free or low maintenance designs are available in wet and dry configurations.

General Service Line batteries are available in Maintenance Free or low maintenance designs and in wet or dry configurations. Wide selections of BCI group sizes are available for automotive, light truck, bus, industrial, agricultural, marine, recreational and valve regulated (VRLA-AGM & Gel) applications.

Caterpillar. The difference counts.™

Cat Dealers define world – class product support. We offer you the right parts and service solutions, when and where you need them.

The Cat Dealer network of highly trained experts keeps your entire fleet up and running to maximize your equipment investments.

CATERPILLAR[®]

World's Toughest Batteries



Premium High Output – Maximum Vibration Resistance

- Vibration Resistance...five times the Industry Standard
- Exclusive “flat top” BCI group 4D & 8D batteries are Maintenance Free and have the industries highest cold cranking amps (CCA)
- Popular BCI group 31 Maintenance Free batteries with industry leading cold cranking amps...up to 1000 (CCA), for electric power, machine or on-highway truck and bus applications. Deep cycle models available for truck, marine or recreational usage

Specifications for Cat Premium High Output Batteries – Available Worldwide

BCI Group Size	Part No.	Cold Cranking Amps**	Reserve Capacity Minutes*	Volts	Amp Hr. Capacity @ 20 Hrs.	Construction	Add Water Maintenance Check Hours	BCI Overall Dimensions				Nominal Weight	
								Length In (mm)	Width In (mm)	Height In (mm)	Wet Lb (kg)	Dry Lb (kg)	Nominal Acid to Fill Qt (liter)
8D	153-5720	1500	465	12	210	C	MF	20.47 (520)	10.8 (275)	9.76 (248)	132 (60)	–	–
8D	101-4000	1400	400	12	190	LAC+	1000	20.7 (526.5)	10.96 (278)	9.76 (248)	132 (60)	86 (39)	18.0 (17.0)
4D	153-5710	1400	425	12	200	C	MF	20.47 (520)	8.58 (218)	9.76 (248)	119 (54)	–	–
4D	153-5700	1125	305	12	145	C	MF	20.47 (520)	8.58 (218)	9.76 (248)	101 (46)	–	–
4D	9X-9730	1300	400	12	190	LAC+	1000	20.75 (527)	8.58 (218)	9.76 (248)	119 (54)	81 (37)	14.8 (14.0)
4D	9X-9720	1000	275	12	140	LAC+	1000	20.75 (527)	8.58 (218)	9.76 (248)	101 (46)	59 (27)	15.9 (15.0)
31	175-4390	1000	180	12	90	C/S	MFA	12.9 (328.4)	6.74 (171.2)	9.29 (236)	60 (27)	–	–
31	175-4370	825	190	12	100	C/S**	MFA	12.9 (328.4)	6.74 (171.2)	9.29 (236)	60 (27)	–	–
31	175-4360	710	185	12	100	C/S***	MFA	12.9 (328.4)	6.74 (171.2)	9.29 (236)	60 (27)	–	–
31	250-0480	710	185	12	100	C/SDT***	MF	12.9 (328.4)	6.74 (171.2)	9.29 (236)	60 (27)	–	–
31	115-2422	1000	170	12	90	C SAE	MFA	12.9 (328.4)	6.74 (171.2)	9.46 (240.3)	60 (27)	–	–
31	115-2421	950	170	12	90	C SAE +	MFA	12.9 (328.4)	6.74 (171.2)	9.46 (240.3)	60 (27)	44 (20)	6.6 (6.2)
31	9X-3404	950	165	12	100	C SAE	MF	13 (330.2)	6.77 (172)	9.46 (240.3)	58 (26)	–	–
31	3T-5760	750	165	12	100	C SAE	MF	13 (330.2)	6.77 (172)	9.46 (240.3)	55 (25)	–	–
24	153-5656	650	110	12	52	SC	MF	10.98 (278.9)	6.85 (174)	9.0 (229.1)	39 (18)	–	–
65	230-6368	880	140	12	80	SC	MF	11.9 (303.4)	7.5 (190.8)	7.5 (191.4)	45.5 (21)	–	–
74	153-5660	650	110	12	52	SC*	MF	10.98 (278.9)	7.0 (178.2)	8.15 (206.9)	39 (18)	–	–
58	175-4280	500	70	12	35	SC	MF	9.96 (253.1)	7.2 (182.5)	6.9 (176)	31 (14)	–	–
2	153-5690	765	210	6	90	LAC+	1000	10.24 (260)	6.8 (173)	8.72 (221.6)	37 (17)	22 (10)	4.8 (4.5)

Construction Notes:

LAC = Low Maintenance, Hybrid Construction

C = Calcium Lead Alloy Grid Design

MF = Maintenance Free

MFA = Maintenance Free with Accessible Vent Caps

S = Stud Terminals

+ = Shipped Dry Only

* = Side Terminals

** = Starting and Deep Cycle Battery

*** = Deep Cycle and Starting Battery

" = For 30 seconds at 0° F (-18° C)

' = Minimum of 25 amp output at 80° F (27° C)

SAE = Uses SAE Posts

SDT = Dual, Top mounted Terminals, Stud and SAE Post, Marine Deep Cycle/Starting Battery










SC = Silver (Ag) Calcium Alloy Grids for resistance to high underhood temperatures

Rugged Design – Built Tough – Reliable Starting

- Positive and Negative plates are anchored to container bottom and locked at the top of cell element for maximum vibration resistance.
- Heavy-duty forged terminal post bushings provide maximum strength and resistance to acid seepage.
- Hefty full-frame grids, no sharp edges, optimum acid/paste combination provides better charge acceptance after deep discharge.
- Manifold vented cover with built-in Flame Arrestor...a safety feature that directs corrosive gases away from the battery and hold-downs.
- Thick, robust container resists rugged treatment typical of heavy-duty commercial use. Embossed part number & descriptors for easy serviceability.

Battery Information

BCI Terminal Locations




Transit Bus Terminal for 8D Part # 250-0473

One piece end terminal.

Right end of Battery.

1/2" - 13 Steel Positive Stud

3/8" - 16 Steel Negative Stud



Cat Premium High Output Batteries – Built Tough to Exceed Demanding Performance Test Requirements:

100 hour Vibration Testing – Five Times the Industry Standard

- Battery must be able to withstand vibration forces without suffering mechanical damage, loss of capacity, loss of electrolyte or without developing internal/external leaks
- Battery must pass a high rate discharge test after the vibration testing

Five 72-hour Deep Discharge/Recharge Test Cycles

- Battery must recover to 25 charging amps within 20 minutes and meet Industry Electrical Performance Standards

30 Day Complete Discharge Test

- Battery must recover to 25 charging amps within 60 minutes and meet Industry Electrical Performance Standards after recharging

SAE J2185 Life Cycle Test

- Battery subject to deeper discharge and charge cycles at extreme temperatures not normally encountered in starting a machine or vehicle

Cold Soak Test

- Battery cold soaked at sub-freezing temperatures and then tested by starting an equally cold engine



Battery Accessories

Group 31 – Charging Posts for Stud Terminals – Part # 4C-5637

Screw-in Charging Posts for Side Terminals – Part # 4C-5638

Wing Nut – Part # 2B-9498 for Part #'s 175-4390/175-4370/175-4360/8C-3628

Wing Nut – Part # 3B-0723 for Part #'s 8C-3638 and 8C-3639

Digital Battery Analyzer – Part # 177-2330

Battery Voltmeter – Part # 4C-6600

Battery Load Tester – Part # 4C-4911

Booster Cable 12' (3.66 m) – Part # 4C-4933

Booster Cable 20' (6.00 m) – Part # 4C-4937

Heavy Duty Commercial Fast Charger (110V) – Part # 4C-4921

Heavy Duty Commercial Fast Charger (220V) – Part # 4C-4910

Extra Vent Caps (6) for Dry Batteries – Part # 7N-0060

Note: Ratings and Part Numbers are subject to change without notice.



Recycle all scrap batteries.
We accept lead-acid batteries
for recycling.

Cat Batteries

World Wide Application Flexibility


Marine Commercial Vessels

Maintenance Free 4D, 8D and Group 31 Batteries. General Service Line Line valve regulated (VRLA) Gel batteries. High Marine Cranking Amps (MCA) and Deep Cycling capabilities.



Automotive-Truck-Bus & RV

A wide selection of popular BCI group sizes. Maintenance Free, Severe Service and Deep Cycle models. Application Specific Group 31 Truck Batteries.

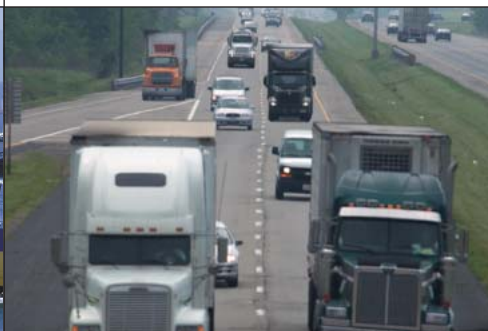

Commercial & Recreational

A wide selection of premium batteries in most BCI group sizes for light commercial, recreational, agricultural and industrial applications.



Marine Pleasure Craft

Premium High Output BCI Group 31, Dual Terminal Deep Cycle Batteries. General Service Line BCI group 24M, 27M and 8V sizes.



Electric Power Generation

Premium High Output Maintenance Free and Accessible batteries in BCI group 4D, 8D, & 31 sizes. High Cold Cranking Amp (CCA) Capability. General Service Line valve regulated (VRLA) AGM batteries for UPS or stationary power applications.



Construction & Mining

Premium High Output Maintenance Free batteries. BCI group 4D, 8D and 31 Sizes. Industry leading cold cranking amps (CCA) and maximum vibration resistance.



Cat Batteries

Heavy-duty Forged Terminal Post Bushings

Built-in Flame Arrestor

Robust Reinforced Case

Vibration Resistant Plates & Elements

Heavy-duty Grids

Rugged Separators

Robust Components = Long Life + Reliable Starts

- Heavy-duty forged terminal post bushings provide maximum strength and resistance to acid seepage that causes corrosion and black posts. Thicker internal terminal posts provide lower electrical resistance and higher cold cranking amp output.
- Rugged microporous polyethylene envelope separators protect against “shorts” and vibration damage. Deep Cycle batteries utilize double insulated Glass mat separators for longer cycling life.
- Maintenance Free batteries utilize calcium lead alloy on both positive and negative plates that reduces gassing and water consumption. Automotive batteries have Silver (Ag) Calcium Alloy Grids for resistance to high underhood temperatures.
- Heavy-duty, full frame battery grids with no sharp edges. An optimum acid/paste combination provides better charge acceptance after a deep discharge.
- Positive and Negative plates are anchored to the container bottom and the cell element is locked at the top for maximum vibration resistance. Straps are thicker, heavier and cast (not welded) into the plates.
- Manifold vented cover with built-in Flame Arrestor...a safety feature that directs corrosive gases away from the battery and hold-downs.
- Robust reinforced case provides extra strength in all temperature extremes. Brickwork design on sides reduces chance of punctures and case flexing. Embossed part number and descriptors for easy serviceability.

CAT, CATERPILLAR, their respective logos and “Caterpillar Yellow,” as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

For more information, see us today or visit our web site at www.cat.com

Caterpillar. The difference counts.™

CATERPILLAR®



Image shown might not reflect actual configuration.

BATTERY CHARGER

The intelligent battery charger has been developed with safety, usability, optimised battery performance and maximum battery lifetimes in mind.

A comprehensive range of input and output protections ensures a continued safe charging environment also enabling the use of the charger as a power supply.

FEATURES

- Intelligent two, three and four stage charging profiles
- Configurable to suit most battery types (12V/24V)
- Adjustable current limit
- Can be used as a battery charger, power supply or both at the same time
- Automatic or Manual boost and storage charge functions to help maintain battery condition
- Digital Microprocessor Technology
- Temperature compensation for battery charging
- Low Output Ripple and superb line regulation
- Three LED Indicators
- AC input Under voltage
- AC input Over voltage
- Battery charger output Over voltage
- Battery charger output Over current
- Optional battery temperature compensation with over temperature protection
- Output short circuit and Inversion polarity with auto recovery
- Configurable charge termination
- UL1236 /UL1564 Compliant

Automatic Boost Mode

- Boosts and equalises cell charge improving battery performance and life

Power Save Mode

- Once the battery is fully charged the chargers switch to Eco-Power to save energy

Communication

- Can be integrated into external systems through MODBUS RTU using RS485
- Fully configurable via PC Software

BENEFITS

- Fully flexible to maximise the life of the battery
- Suitable for a wide range of battery types
- Switched mode design
- Minimum 86% efficiency throughout full operating range
- No external intervention for boost mode
- Multiple chargers can be linked together to provide larger current output
- Can be permanently connected to battery and mains (utility) supply. No need to disconnect through high load conditions.

SPECIFICATION

AC SUPPLY

VOLTAGE RANGE 90 V to 305 V (L-N)

FREQUENCY RANGE

48 Hz to 64 Hz (L-N)

DC OUTPUT RATING

10 A DC at 24 V DC

RIPPLE AND NOISE

<1%

EFFICIENCY

>86%

REGULATION LINE

<0.5%

LOAD

2%

TEMPERATURE SENSOR INPUT

PT1000

PROTECTIONS

Short Circuit
DC Over Voltage
DC Over Current
Reverse Polarity
Over Temperature
AC Under & Over Voltage

CHARGE FAILURE RELAY

3 A at 30 V DC volt free relay

DIMENSIONS OVERALL

70 mm x200 mm x 130 mm
2.7" x 7.9" x 5.1"

WEIGHT

0.75 kg

OPERATING TEMPERATURE RANGE

-30 °C to +80 °C
-22 °F to +176 °F

STORAGE TEMPERATURE RANGE


-30 °C to +80 °C
-22 °F to +176 °F

www.cat.com/electricpower

©2024 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice.

The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow" the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

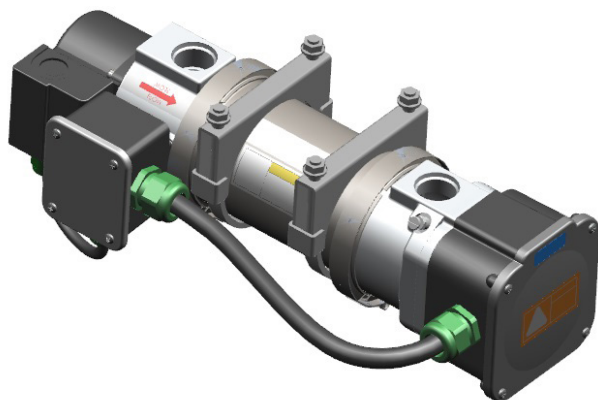

Features

Factory Installed

- Complete with Hoses, Thermostat (Control and Hi-Limit) and Pump
- Base Frame mounting minimizes Engine induced vibration
- Temperature Controlled Pump operation
- Supplied with UL, C (UL) US and CE recognized components
- Control Thermostat is Factory preset to 49°C (120°F)

Heater Design Description

- Jacket Water Heater Package is designed to efficiently preheat the engine by circulating the heated coolant onto engine
- This design results in following benefits
- Increase life of Heater Hoses, Engine Seals and Heating Elements
- Improves Heat Transfer efficiency from Elements to Engine Coolant
- Uniform Engine temperature distribution
- Application of Thermostat with a reduced thermal differential
- Lower Customer utility costs and increased Heater reliability
- Heater's Control Thermostat set point is preset

Jacket Water Heater with Pump C27 and C32

Caterpillar offers a factory installed Jacket Water Heater for improved Engine Cold-Starting capability

This Jacket Water Heater is a Thermostatically controlled Heater with an integrated pump, built in bleed screw and High Limit Thermostat that can be manually reset


Forced circulation of the coolant delivers uniform heating throughout the entire engine, reduces wear from Cold spots and offers significant reduction of Electrical consumption

Heater Operation

A 34 L/pm (9 GPM) Pump is located at the Heater Inlet to push the coolant through the Heater
A Control Thermostat is located inside a Plastic Enclosure near the Inlet of Heater and responds to the temperature of coolant entering the tank
A High Limit Thermostat is located inside a Plastic Element Enclosure near the Outlet of Heater opens and cuts off supply to Heating Element, if tank attains 96°C (205°F). This Thermostat can be manual reset to close position.

Temperature Controlled Pump Operation – Pump runs only with Heating Elements.

Air release valve (Bleed Screw) provided to allow vent air from Heater, prior to energizing the Heater.

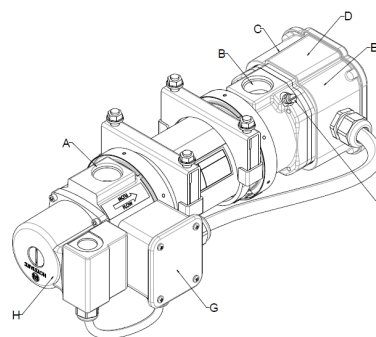

A. Suction Port
(SAE Dash 16)

B. Discharge Port
(SAE Dash 16)

C. Power in Wiring Entrance

D. Element Assembly

E. High-limit Thermostat
with manual reset (in
Element assembly)

F. Air Release Valve

G. Control Thermostat
(in enclosure)



H. Pump/Motor

Jacket Water Heater



Specifications


	Voltage	
	240	220
Heater Power	6kW	6kW
Frequency	60	50
Phase	Single	Single
Amps	25A	26A
Flow Rate	34 L/pm (9 GPM)	
Pump Rating	230 VAC 97W	230 VAC 70W
Control Thermostat (Set Point)	38°C – 49°C (100°F – 120°F)	
High Limit Thermostat (Set Point)	96°C (205°F), Manual Reset	
Length	466 mm (18.3")	
Width	216 mm (8.5")	
Height	183 mm (7.2")	
Weight	6.5 Kg	

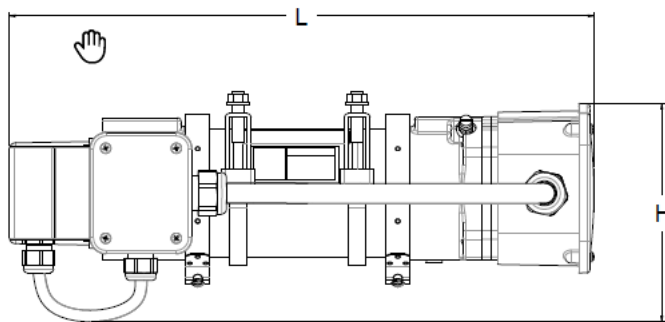

Jacket Water Heater



Wiring Diagram

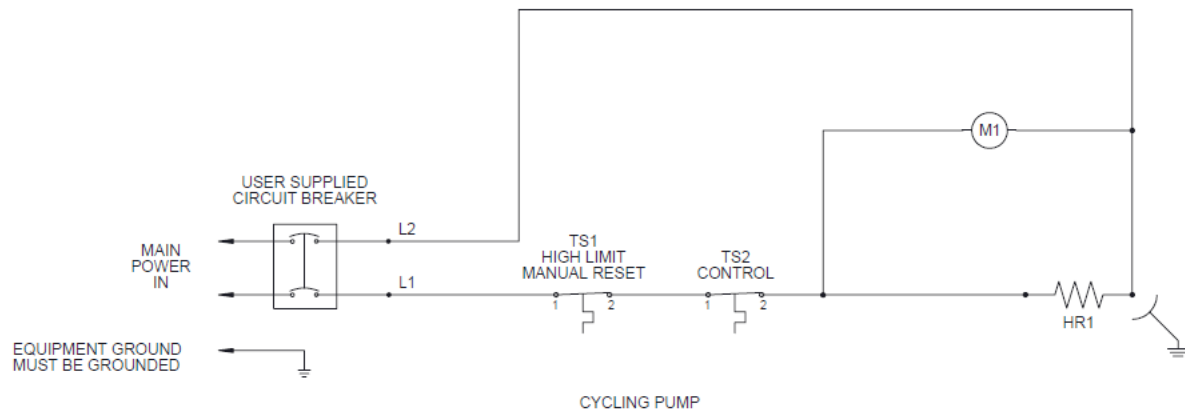

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

www.cat.com/electricpower
©2024 Caterpillar
All rights reserved.

Cat[®] ELC

Extended Life Coolant for Caterpillar and original equipment manufacturer (OEM)
diesel and gasoline engines

50/50 Premix



Recommended Use

Cat ELC meets or exceeds the requirements of the following specifications and guidelines:

- Cat EC-1
- TMC RP-329
- TMC RP-338
- ASTM D-3306
- ASTM D-6210
- SAE J1034

Cat ELC also meets the performance requirements of Cummins, Detroit Diesel, International, Mack and Volvo.

Discover the Difference

Cat ELC is developed, tested and approved by Caterpillar to meet the same high standards as all Genuine Cat Parts.

- **Factory-Fill**—Used as standard factory-fill for all Cat machine cooling systems.
- **Lower Maintenance Costs**—Reduces engine coolant and additive costs by as much as 500% compared to conventional coolants. It eliminates the need for supplemental coolant additives, extends coolant change-out intervals and reduces disposal requirements.
- **Advanced Metal Protection**—Incorporates an advanced formula technology with organic acid additive corrosion inhibitors, such as a combination of mono and dicarboxylates for maximum protection of copper, solder, brass, steel, cast iron and aluminum.

CATERPILLAR[®]

Cat ELC for Maximum Coolant Life

Cat DEAC™



**3000 Hour Life or
333,000 km (200,000 miles)**

Cat Supplemental Coolant Additives Every 250 Hours
or 25,000 km (15,000 miles)

Cat ELC (Machines and Commercial Engines)



Cat Extender Every 6000 Hours*

12,000 Hour Life or 6 Years**
(whichever comes first)

Cat ELC (Truck Engines)



Cat Extender Every 500,000 km (300,000 miles)* **1,000,000 km (600,000 miles) or 6 Years****
(whichever comes first)

* Or one-half of the coolant service life.

** These coolant change intervals are only possible with annual S-O-S Level 2 coolant sampling and analysis.

Typical Characteristics*

Color	Strawberry Red
Boiling protection with 15 psi (1 bar) radiator cap	
50% Cat ELC/50% water	129°C (265°F)
60% Cat ELC/40% water (ELC concentrate added)	132°C (270°F)
Freezing protection	
50% Cat ELC/50% water	-37°C (-34°F)
60% Cat ELC/40% water (ELC concentrate added)	-52°C (-62°F)
Nitrite (50% solution)	500 ppm
Molybdate (50% solution)	530 ppm

*The values shown are typical values and should not be used as quality control parameters to either accept or reject product. Specifications are subject to change without notice.

S-O-SSM services for early problem detection

Protect your investment with Cat S-O-S Coolant Analysis, the ultimate detection and diagnostic tool for your equipment. We recommend S-O-S Level 1 Coolant Analysis according to the engine's Operation and Maintenance Manual, and Level 2 Coolant Analysis annually for all your Cat equipment.

Cat ELC Extender for Longer Life

- Exceeds Cat EC-1 performance requirements
- Protects against cylinder liner/block pitting and cavitation erosion
- Should be added at 500,000 km (300,000 miles) for Cat powered on-highway trucks and 6,000 hours for commercial engines
- Extender is only necessary once during the life of the coolant
- Ensures Cat ELC performance to 1,000,000 km (600,000 miles) or 12,000 hours

Cat ELC Extender and Flush Intervals

Cat ELC Extender should be added after 6,000 hours or 300,000 miles (500,000 km) of operation, and the system should be drained and flushed with clean water after 12,000 hours or 600,000 miles (1,000,000 km). No cleaning agents are needed. If S-O-SSM Services are used regularly, safe operation with Cat ELC may extend beyond 12,000 hours.

Health and Safety

Under normal conditions of intended use, this product does not pose a risk to health. Excessive exposure may result in eye, skin or respiratory irritation. Always observe good hygiene measures. Read and understand the Material Safety Data Sheet (MSDS) before using this product. For a copy of the MSDS, visit us on the web at www.catmsds.com.

CAT® DEALERS DEFINE WORLD-CLASS PRODUCT SUPPORT.

We offer you the right parts and service solutions, when and where you need them.

The Cat Dealer network of highly trained experts can help you maximize your equipment investment.





GROUND FAULT RELAY (GFR)

Picture shown may not reflect actual configuration

GENERAL DESCRIPTION

GFR is a microprocessor-based ground-fault relay for resistance- and solidly-grounded systems. In addition to common systems, it is uniquely suited for use on systems with significant harmonic content. GFR can provide main-plant protection, feeder-level protection, or individual-load protection. Proper current transformer selection provides the desired pickup range. The output contacts can be connected for use in protective tripping circuits or in alarm indication circuits. The analog output can be used with a PLC or a meter.

FEATURES & BENEFITS

Benefits

- Trip setting based on input CT primary, allows use with any CT. Minimum 50 mA with EFCT Series.
- Adjustable trip delay allows quick protection and system coordination
- Form A and Form B ground-fault output contacts for operation of separate annunciation and trip circuits
- Alarms when CT is not connected
- Compatible with variable-speed drives
- Eliminates nuisance tripping
- Retains trip state while de-energized to simplify troubleshooting
- No calibration required, saves on maintenance cost
- Allows operation in application where one side of PT is faulted, provides flexibility for numerous applications

Features

- Adjustable pickup (1-99%)
- Adjustable time delay (50 ms - 2.5 s)
- Output contacts
- Analog output (0 - 5 V)
- CT-Loop monitoring
- Selectable DFT or peak detection filtering
- Harmonic filtering
- Non-volatile trip memory
- Microprocessor based
- Universal power supply

FRONT-PANEL CONTROLS

Ground-fault trip level

The % CT PRIMARY selector switches are used to set the ground-fault trip level as a percentage of the CT-primary rating. In tripping systems, a ground-fault trip level of 10 to 20% of the prospective ground-fault current is often used. In alarm-only systems, a value of 50% of the prospective ground-fault current is often used. To avoid sympathetic tripping, the trip level must be above the charging current of the protected feeder. A 0% selection provides protection at 1%.

Ground-fault trip time

GFR has a definite-time trip characteristic. The TIME (s) selector switch is used to set the ground-fault trip delay time for coordination with upstream and downstream ground-fault devices. Coordination requires the same trip level for all ground-fault devices in a system and the trip time to progressively increase upstream. The amount of equipment removed from the system will be a minimum if the first ground-fault device to operate is the one immediately upstream from the fault.

Reset

If the Reset Mode switch is in the LATCHING position, a trip remains latched until the RESET button is pressed or the remote-reset terminals are momentarily connected. In the non-fail-safe mode, cycling the supply voltage will also reset the GFR.

If the Reset Mode switch is in the AUTORESET position, a trip will reset when the fault is removed. The reset circuit responds only to a momentary closure so that a jammed or shorted button will not prevent a trip. The front-panel RESET button is inoperative when the remote-reset terminals (6 and 7) are connected

Test

The TEST button is used to test the ground-fault circuit, the indication, and the output relay. When the TEST button is pressed for one second, a test signal is applied to the ground-fault-detection circuit, the circuit will trip, the TRIP LED will light, and the output relay will operate. If high-current inhibit has been selected, the INHB LED will light.

Front-panel indication

- **Power**
The green LED labelled PWR indicates the presence of supply voltage.
- **Trip**
The red LED labelled TRIP indicates a trip. A solid red LED indicates a ground-fault trip. A flashing LED indicates a trip initiated by a CT fault. Two fast flashes indicate a diagnostic trip.

Self diagnostics


A diagnostic trip is indicated by two fast flashes of the TRIP LED. It can be caused by a diagnostic problem detected by the watchdog timer or from an incorrect reading from non-volatile memory. Press RESET or cycle supply voltage.

- **Trip inhibit**
The yellow LED labelled INHB indicates that output relay operation was inhibited during a high-current ground fault. When a ground-fault trip occurs during a high-current ground fault, both the TRIP and INHB LED's will be ON. Inhibit indication is reset when the ground-fault trip is reset. Inhibit operation and indication will not respond if the trip-inhibit switch is in the OFF position.

SPECIFICATIONS

- IEEE Device Numbers - Ground fault (50G/N, 51G/N)
- Dimensions
 - H 75 mm (3.0")
 - W 55 mm (2.2")
 - D 115 mm (4.5")
- Trip Level Settings - 1-99% CT-Primary Rating
- Trip Time Settings - 0.05-2.5 s
- Contact Operating Mode - Selectable fail-safe or non-fail-safe
- Output Contacts Isolated Form A and Form B
- Approvals CSA certified, UL Listed (E340889), CE (European Union), C-Tick (Australian)
- Analog Output 0-5 V

OUTLINE AND MOUNTING DETAILS

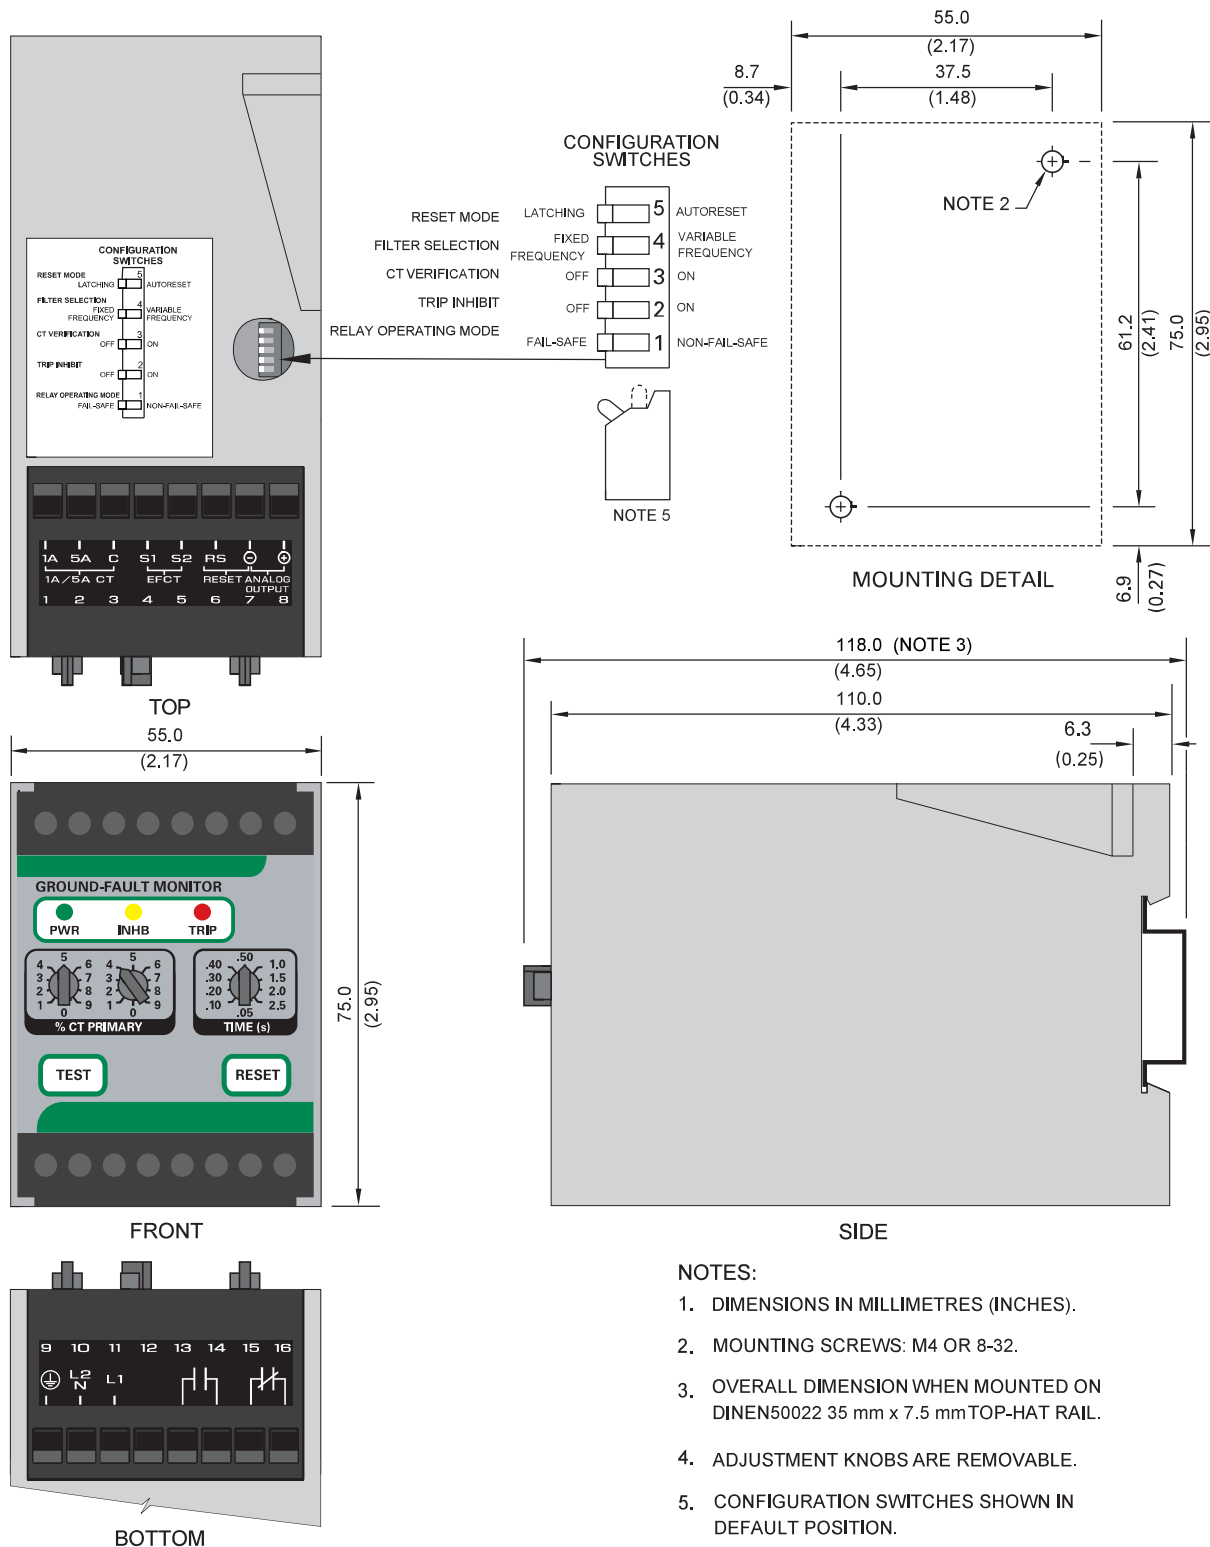

NOTES:

1. DIMENSIONS IN MILLIMETRES (INCHES).
2. MOUNTING SCREWS: M4 OR 8-32.
3. OVERALL DIMENSION WHEN MOUNTED ON DINEN50022 35 mm x 7.5 mm TOP-HAT RAIL.
4. ADJUSTMENT KNOBS ARE REMOVABLE.
5. CONFIGURATION SWITCHES SHOWN IN DEFAULT POSITION.

Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.



Picture shown may not reflect actual configuration

Electric Starting Motor

for C27, **C32**, 3512, 3516,
C175-16 and C175-20

U.S. Sourced

Electric Starting Motors are used for improved engine start capability. Battery-powered electric motors utilize low voltage direct current and provide fast, convenient, pushbutton starting with lightweight, compact, engine-mounted components.

Design

- Splash-proof and environmentally protected.
- Seamless one-piece solenoid case is sealed for corrosion protection.
- Positive-engagement shift mechanism assures pinion-to-ring gear engagement prior to cranking, minimizing milled ring gears and pinions.
- Epoxy impregnation and glass banding give starter armature exceptional rotation strength.
- Positive spring retention in the six wide, one-piece brushes gives uniform pressure and brush wear for extended service life.
- Extra-large brush leads are used to handle the high current experienced during the cranking of high-power diesel engines.
- Rotatable drive housing, with 12 positions, allows easy repositioning of the solenoid switch.
- Totally Enclosed Shift mechanism.
- Bearing Lubrication and Sealing: Three sintered-bronze bearing extra-large oil reservoirs.


Specifications

- System Voltage: 24 V
- Rotation: Clockwise
- Polarity: Insulated
- Mounting: SAE #3
- Pinion Data:
 - o No Teeth/Pinion Blank: 11/12
 - o Pitch: 6/8
- Output: 24V: 9.0 kW
- Weight: 34 kg (75 lbs)
- Operation temperature range
 - o - 25°C to +121°C
- Pressure Angle: 20°
- Oil Sealed: ± 6 PSI
- Water Sealed: ± 6 PSI and 3500 PSI Pressure Wash

Option

- Heavy-Duty Applications: Two or more units can be tandem-mounted for starting large engines.



Starting Motor Performance (@ 24V, 25°C)

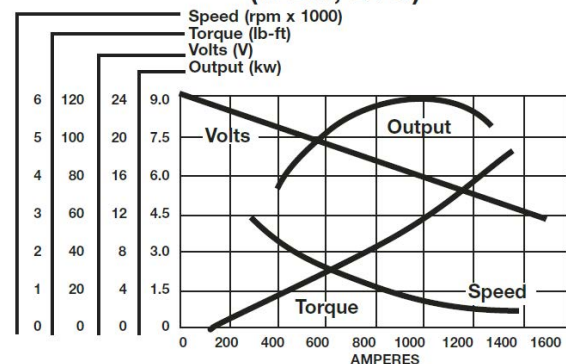

Available Options

Model	Single	Dual	Quadruple
C27		+	
C32		+	
3512	+	+	
3512B	+	+	
3512C	+	+	
3516		+	
3516B		+	
3516C		+	
C175-16		+	+
C175-20		+	+

Dimensions Drawing

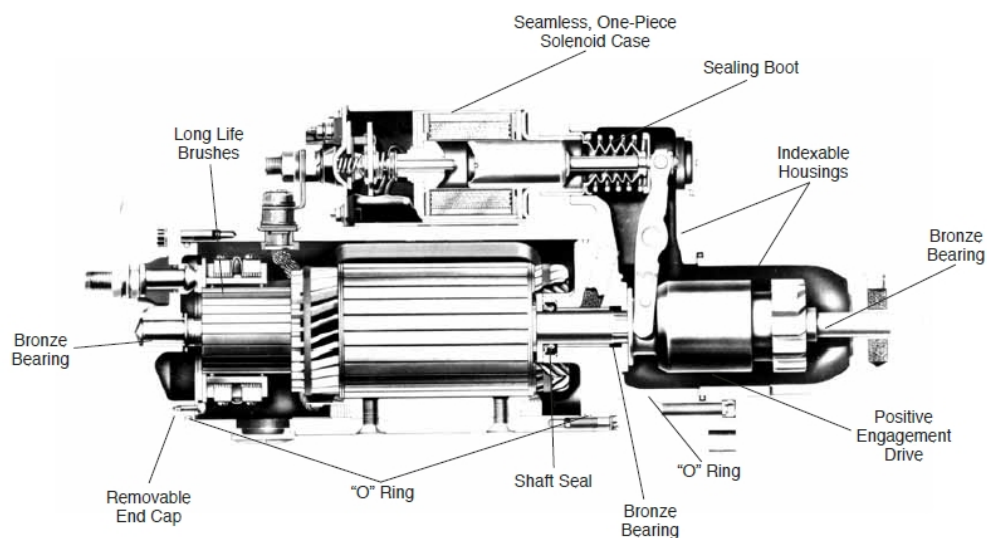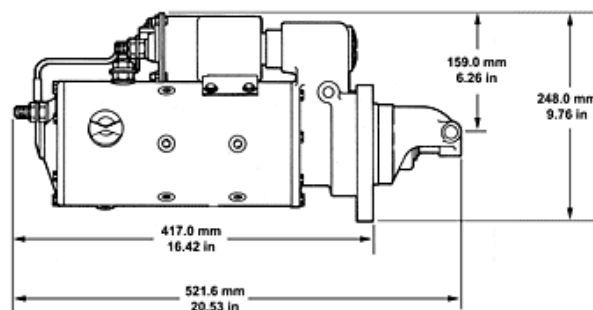

Materials and specifications are subject to change without notice.
 CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

cat.com/electricpower
 ©2017 Caterpillar
 All rights reserved.



Remote Emergency Stop Button

Image shown may not reflect actual configuration.

Features and Benefits

- Enclosure degree of protection – IP 69K (NEMA 6)
- UL Listed (NKCR)
- Assembled enclosure with shroud
- 40 mm mushroom emergency stop
- Twist release
- 2NC – horizontally mounted

Dimensions

- Net Width: 0.065 m
- Net Height: 0.078 m
- Net Depth: 0.065 m
- Net Weight: 0.124 kg

www.Cat-ElectricPower.com

©2020 Caterpillar

All rights reserved.

Materials and specifications are subject to change without notice.
CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission



Image shown may not reflect actual configuration.

20A Tamper-Resistant, Weather-Resistant GFCI Receptacles

Features and Benefits

- Automatically tests the GFCI every time the reset button is pushed in. The GFCI will not reset if the GFCI circuit is not functioning properly.
- By blocking reset of the GFCI if protection has been compromised, SmartLockPRO reduces the possibility of end-users incorrectly assuming that a reset GFCI outlet is providing ground fault protection when it actually is not.
- A line-load reversal diagnostic feature is provided which prevents the GFCI from being reset and stops power from being fed to the GFCI receptacle face or through to downstream devices. A green LED indicator on the GFCI's face also illuminates to alert the installer to the line-load wiring reversal.

Weather-Resistant GFCIs

- Meet UL 498 requirements for weather-resistant receptacles.

Tamper-Resistant GFCIs

- Shutter mechanism inside the receptacle blocks access to the contacts unless a two-prong plug is inserted, helping ensure foreign objects will be locked out.

Product Features

- Grounding: GFCI ground fault
- Feature: Weather and tamper-resistant
- Amperage: 20 Amp
- Voltage: 125 Volt
- NEMA: 5-20R
- Trip Level: Class A, 5mA plus or minus 1mA
- Pole: 2
- Wire: 3
- Color: White

Standards and Certifications

- NEMA: WD-6
- ANSI: C-73
- UL498: File E13399
- CSA C22.2 No. 42: File LR-57811
- NOM: 057
- UL 943: File E48380

Receptacles contained in a
weather resistant box
and in-use cover.



www.Cat-ElectricPower.com

©2016 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow", the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

Yancey Power Systems
259 Lee Industrial Blvd.
Austell, GA 30168-7406
770.941.2424 tel
770.941.2411 fax
877.278.6235 toll free
www.YanceyPower.com

Warranty & Certifications

Effective with sales to the first user on or after August 1, 2018

CATERPILLAR LIMITED WARRANTY

Industrial, Petroleum, Locomotive, and Agriculture Engine Products and Electric Power Generation Products

Worldwide

Caterpillar Inc. or any of its subsidiaries ("Caterpillar") warrants new and remanufactured engines and new and rebuild electric power generation products sold by it (including any products of other manufacturers packaged and sold by Caterpillar), to be free from defects in material and workmanship.

This warranty does not apply engines sold for use in on-highway vehicle or marine applications; engines in machines manufactured by or for Caterpillar; C175, 3500 and 3600 series engines used in locomotive applications; 3000 Family engines, C0.5 through C4.4 and ACERT™ (C6.6, C7, C7.1, C9, C9.3, C11, C13, C15, C18, C27, and C32) engines used in industrial, mobile agriculture and locomotive applications; or Cat[®] batteries; or Electric Power Generation Products manufactured or assembled in India. These products are covered by other Caterpillar warranties.

This warranty is subject to the following:

Warranty Period

- For industrial engines, engines in a petroleum applications or Petroleum Power Systems (excluding petroleum fire pump application), or engines in a Locomotive application, or Uninterruptible Power Supply (UPS) systems, the warranty period is 12 months after date of delivery to the first user.
- For engines used in petroleum fire pump and mobile agriculture applications the warranty period is 24 months after date of delivery to the first user.
- For controls only (EPIC), configurable and custom switchgear products, and automatic transfer switch products, the warranty period is 24 months after date of delivery to the first user.
- For new CG132, CG170 and CG260 series power generation products the warranty period is 24 months after date of delivery to first user, but not to exceed 36 months from shipment from the Caterpillar place of manufacture.
- For electric power generation products other than CG132, CG170 and CG260 series in prime or continuous applications the warranty period is 12 months. For standby applications the warranty period is 24 months/1000 hours. For emergency standby applications the warranty period is 24 months/400 hours. All terms begin after date of delivery to the first user.
- For Caterpillar rebuild electric power generation products the warranty period is 12 months, but not to exceed 24 months from shipment of rebuilt electric power generation product from Caterpillar.
- For all other applications the warranty period is 12 months after date of delivery to the first user.

Caterpillar Responsibilities

If a defect in material or workmanship is found during the warranty period, Caterpillar will, during normal working hours and at a place of business of a Cat dealer or other source approved by Caterpillar:

- Provide (at Caterpillar's choice) new, Remanufactured, or Caterpillar approved repaired parts or assembled components needed to correct the defect.
- Note:** New, remanufactured, or Caterpillar approved repaired parts or assembled components provided under the terms of this warranty are warranted for the remainder of the warranty period applicable to the product in which installed as if such parts were original components of that product. Items replaced under this warranty become the property of Caterpillar.
- Replace lubricating oil, filters, coolant, and other service items made unusable by the defect.
- Provide reasonable and customary labor needed to correct the defect, including labor to disconnect the product from and reconnect the product to its attached equipment, mounting, and support systems, if required.

For new 3114, 3116, and 3126 engines and, new and Caterpillar rebuild electric power generation products (which includes the following: any new products of other manufacturers packaged and sold by Caterpillar)

- Provide travel labor, up to four hours round trip, if in the opinion of Caterpillar, the product cannot reasonably be transported to a place of business of a Cat dealer or other source approved by Caterpillar (travel labor in excess of four hours round trip, and any meals, mileage, lodging, etc. is the user's responsibility).

For all other products:

- Provide reasonable travel expenses for authorized mechanics, including meals, mileage, and lodging, when Caterpillar chooses to make the repair on-site.

User Responsibilities

The user is responsible for:

- Providing proof of the delivery date to the first user.
- Labor costs, except as stated under "Caterpillar Responsibilities," including costs beyond those required to disconnect the product from and reconnect the product to its attached equipment, mounting, and support systems.
- Travel or transporting costs, except as stated under "Caterpillar Responsibilities."

- Premium or overtime labor costs.
- Parts shipping charges in excess of those that are usual and customary.
- Local taxes, if applicable.
- Costs to investigate complaints, unless the problem is caused by a defect in Caterpillar material or workmanship.
- Giving timely notice of a warrantable failure and promptly making the product available for repair.
- Performance of the required maintenance (including use of proper fuel, oil, lubricants, and coolant) and items replaced due to normal wear and tear.
- Allowing Caterpillar access to all electronically stored data.

Limitations

Caterpillar is not responsible for:

- Failures resulting from any use or installation that Caterpillar judges improper.
- Failures resulting from attachments, accessory items, and parts not sold or approved by Caterpillar.
- Failures resulting from abuse, neglect, and/or improper repair.
- Failures resulting from user's delay in making the product available after being notified of a potential product problem.
- Failures resulting from unauthorized repairs or adjustments, and unauthorized fuel setting changes.
- Damage to parts, fixtures, housings, attachments, and accessory items that are not part of the engine, Cat Selective Catalytic Reduction System or electric power generation product (including any products of other manufacturers packaged and sold by Caterpillar).
- Repair of components sold by Caterpillar that is warranted directly to the user by their respective manufacturer. Depending on type of application, certain exclusions may apply. Consult your Cat dealer for more information.

(Continued on reverse side...)

This warranty covers every major component of the products. Claims under this warranty should be submitted to a place of business of a Cat dealer or other source approved by Caterpillar. For further information concerning either the location to submit claims or Caterpillar as the issuer of this warranty, write Caterpillar Inc., 100 N. E. Adams St., Peoria, IL USA 61629.

Caterpillar's obligations under this Limited Warranty are subject to, and shall not apply in contravention of, the laws, rules, regulations, directives, ordinances, orders, or statutes of the United States, or of any other applicable jurisdiction, without recourse or liability with respect to Caterpillar.

A) For products operating outside of Australia, Fiji, Nauru, New Caledonia, New Zealand, Papua New Guinea, the Solomon Islands and Tahiti, the following is applicable:

NEITHER THE FOREGOING EXPRESS WARRANTY NOR ANY OTHER WARRANTY BY CATERPILLAR, EXPRESS OR IMPLIED, IS APPLICABLE TO ANY ITEM CATERPILLAR SELLS THAT IS WARRANTED DIRECTLY TO THE USER BY ITS MANUFACTURER.

THIS WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, EXCEPT CATERPILLAR EMISSION-RELATED COMPONENTS WARRANTIES FOR NEW ENGINES, WHERE APPLICABLE. REMEDIES UNDER THIS WARRANTY ARE LIMITED TO THE PROVISION OF MATERIAL AND SERVICES, AS SPECIFIED HEREIN.

CATERPILLAR IS NOT RESPONSIBLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

CATERPILLAR EXCLUDES ALL LIABILITY FOR OR ARISING FROM ANY NEGLIGENCE ON ITS PART OR ON THE PART OF ANY OF ITS EMPLOYEES, AGENTS OR REPRESENTATIVES IN RESPECT OF THE MANUFACTURE OR SUPPLY OF GOODS OR THE PROVISION OF SERVICES RELATING TO THE GOODS.

IF OTHERWISE APPLICABLE, THE VIENNA CONVENTION ON CONTRACTS FOR THE INTERNATIONAL SALE OF GOODS IS EXCLUDED IN ITS ENTIRETY.

For personal or family use engines or electric power generation products, operating in the USA, its territories and possessions, some states do not allow limitations on how long an implied warranty may last nor allow the exclusion or limitation of incidental or consequential damages. Therefore, the previously expressed exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights, which vary by jurisdiction. To find the location of the nearest Cat dealer or other authorized repair facility, call (309) 675-1000. If you have questions concerning this warranty or its applications, call or write:

In USA and Canada: Caterpillar Inc, 100 N.E. Adams St., Peoria, IL USA 61629, Attention: Customer Service Manager, Telephone 1 (309) 675-1000, outside the USA and Canada: Contact your Cat dealer.

B) For products operating in Australia, Fiji, Nauru, New Caledonia, New Zealand, Papua New Guinea, the Solomon Islands and Tahiti, the following is applicable:

THIS WARRANTY IS IN ADDITION TO WARRANTIES AND CONDITIONS IMPLIED BY STATUTE AND OTHER STATUTORY RIGHTS AND OBLIGATIONS THAT BY ANY APPLICABLE LAW CANNOT BE EXCLUDED, RESTRICTED OR MODIFIED ("MANDATORY RIGHTS"). ALL OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED (BY STATUTE OR OTHERWISE), ARE EXCLUDED. WITHOUT LIMITING THE FOREGOING PROVISIONS OF THIS PARAGRAPH, WHERE A PRODUCT IS SUPPLIED FOR BUSINESS PURPOSES, THE CONSUMER GUARANTEES UNDER THE CONSUMER GUARANTEES ACT 1993 (NZ) WILL NOT APPLY.

NEITHER THIS WARRANTY NOR ANY OTHER CONDITION OR WARRANTY BY CATERPILLAR, EXPRESS OR IMPLIED (SUBJECT ONLY TO THE MANDATORY RIGHTS), IS APPLICABLE TO ANY ITEM CATERPILLAR SELLS THAT IS WARRANTED DIRECTLY TO THE USER BY ITS MANUFACTURER.

IF THE MANDATORY RIGHTS MAKE CATERPILLAR LIABLE IN CONNECTION WITH SERVICES OR GOODS, THEN TO THE EXTENT PERMITTED UNDER THE MANDATORY RIGHTS, THAT LIABILITY SHALL BE LIMITED AT CATERPILLAR'S OPTION TO (a) IN THE CASE OF SERVICES, THE SUPPLY OF THE SERVICES AGAIN OR THE PAYMENT OF THE COST OF HAVING THE SERVICES SUPPLIED AGAIN AND (b) IN THE CASE OF GOODS, THE REPAIR OR REPLACEMENT OF THE GOODS, THE SUPPLY OF EQUIVALENT GOODS, THE PAYMENT OF THE COST OF SUCH REPAIR OR REPLACEMENT OR THE ACQUISITION OF EQUIVALENT GOODS.

CATERPILLAR EXCLUDES ALL LIABILITY FOR OR ARISING FROM ANY NEGLIGENCE ON ITS PART OR ON THE PART OF ANY OF ITS EMPLOYEES, AGENTS OR REPRESENTATIVES IN RESPECT OF THE MANUFACTURE OR SUPPLY OF GOODS OR THE PROVISION OF SERVICES RELATING TO THE GOODS.

CATERPILLAR IS NOT LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES UNLESS IMPOSED UNDER MANDATORY RIGHTS.

IF OTHERWISE APPLICABLE, THE VIENNA CONVENTION ON CONTRACTS FOR THE INTERNATIONAL SALE OF GOODS IS EXCLUDED IN ITS ENTIRETY.

C) For products supplied in Australia:

IF THE PRODUCTS TO WHICH THIS WARRANTY APPLIES ARE:

I. PRODUCTS OF A KIND ORDINARILY ACQUIRED FOR PERSONAL, DOMESTIC OR HOUSEHOLD USE OR CONSUMPTION; OR

II. PRODUCTS THAT COST AUD 40,000 OR LESS,

WHERE THOSE PRODUCTS WERE NOT ACQUIRED FOR THE PURPOSE OF RE-SUPPLY OR FOR THE PURPOSE OF USING THEM UP OR TRANSFORMING THEM IN THE COURSE OF PRODUCTION OR MANUFACTURE OR IN THE COURSE OF REPAIRING OTHER GOODS OR FIXTURES, THEN THIS SECTION C APPLIES.

THE FOLLOWING MANDATORY TEXT IS INCLUDED PURSUANT TO THE AUSTRALIAN CONSUMER LAW AND INCLUDES REFERENCES TO RIGHTS THE USER MAY HAVE AGAINST THE DIRECT SUPPLIER OF THE PRODUCTS: OUR GOODS COME WITH GUARANTEES THAT CANNOT BE EXCLUDED UNDER THE AUSTRALIAN CONSUMER LAW. YOU ARE ENTITLED TO A REPLACEMENT OR REFUND FOR A MAJOR FAILURE AND COMPENSATION FOR ANY OTHER REASONABLY FORESEEABLE LOSS OR DAMAGE. YOU ARE ALSO ENTITLED TO HAVE THE GOODS REPAIRED OR REPLACED IF THE GOODS FAIL TO BE OF ACCEPTABLE QUALITY AND THE FAILURE DOES NOT AMOUNT TO A MAJOR FAILURE. THE INCLUSION OF THIS TEXT DOES NOT CONSTITUTE ANY REPRESENTATION OR ACCEPTANCE BY CATERPILLAR OF LIABILITY TO THE USER OR ANY OTHER PERSON IN ADDITION TO THAT WHICH CATERPILLAR MAY HAVE UNDER THE AUSTRALIAN CONSUMER LAW.

TO THE EXTENT THE PRODUCTS FALL WITHIN THIS SECTION C BUT ARE NOT OF A KIND ORDINARILY ACQUIRED FOR PERSONAL, DOMESTIC OR HOUSEHOLD USE OR CONSUMPTION, CATERPILLAR LIMITS ITS LIABILITY TO THE EXTENT IT IS PERMITTED TO DO SO UNDER THE AUSTRALIAN CONSUMER LAW TO, AT ITS OPTION, THE REPAIR OR REPLACEMENT OF THE PRODUCTS, THE SUPPLY OF EQUIVALENT PRODUCTS, OR THE PAYMENT OF THE COST OF SUCH REPAIR OR REPLACEMENT OR THE ACQUISITION OF EQUIVALENT PRODUCTS.

THE WARRANTY SET OUT IN THIS DOCUMENT IS GIVEN BY CATERPILLAR INC. OR ANY OF ITS SUBSIDIARIES, 100 N. E. ADAMS ST, PEORIA, IL USA 61629, TELEPHONE 1 309 675 1000, THE USER IS RESPONSIBLE FOR ALL COSTS ASSOCIATED WITH MAKING A CLAIM UNDER THE WARRANTY SET OUT IN THIS DOCUMENT, EXCEPT AS EXPRESSLY STATED OTHERWISE IN THIS DOCUMENT, AND THE USER IS REFERRED TO THE BALANCE OF THE DOCUMENT TERMS CONCERNING CLAIM PROCEDURES, CATERPILLAR RESPONSIBILITIES AND USER RESPONSIBILITIES.

TO THE EXTENT PERMISSIBLE BY LAW, THE TERMS SET OUT IN THE REMAINDER OF THIS WARRANTY DOCUMENT (INCLUDING SECTION B) CONTINUE TO APPLY TO PRODUCTS TO WHICH THIS SECTION C APPLIES.

©2018 Caterpillar All Rights Reserved.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow" the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.