



PLAN VIEW

- ENCLOSURE
- ON SUBBASE
 - 14 GA. GALVANNEALED STEEL
 - GALVANIZED ANGLE MOUNTING RAILS
 - STRUCTURAL TUBING FRAME
 - MOTORIZED INTAKE LOUVERS WITH PLENUM
 - GRAVITY EXHAUST LOUVERS WITH PLENUM
 - SOUND ATTENUATED 10 65 dba @ 30 FT.
 - LINED WITH MINERAL WOOL & PERFORATED STEEL
 - INSULATED EXHAUST PIPE
 - CRITICAL GRADE DISK MUFFLER
 - TAILPIPE & RAIN CAP
 - 30 KYA MINI POWER CENTER WITH 100A PANEL
 - 6 VAPOR-TIGHT INTERIOR INCANDESCENT LIGHTS
 - 2 EXTERIOR LIGHTS WITH PHOTO CELL
 - 2 EMERGENCY BREAK GLASS STATIONS
 - 2 BATTERY POWERED 2 HEAD EMERGENCY LIGHTS
 - 2 ELECTRIC HEATERS WITH THERMOSTAT
 - VENTILATION FAN WITH INTAKE DAMPER
 - ROOF MOUNTED BEACON & HORN
 - 120 MPH WIND RATED
- FINISH
- TWO COATS RUST INHIBITING PRIMER
 - WEATHER PROOF CAULK BETWEEN PANELS
 - TWO COATS STANDARD ENAMEL

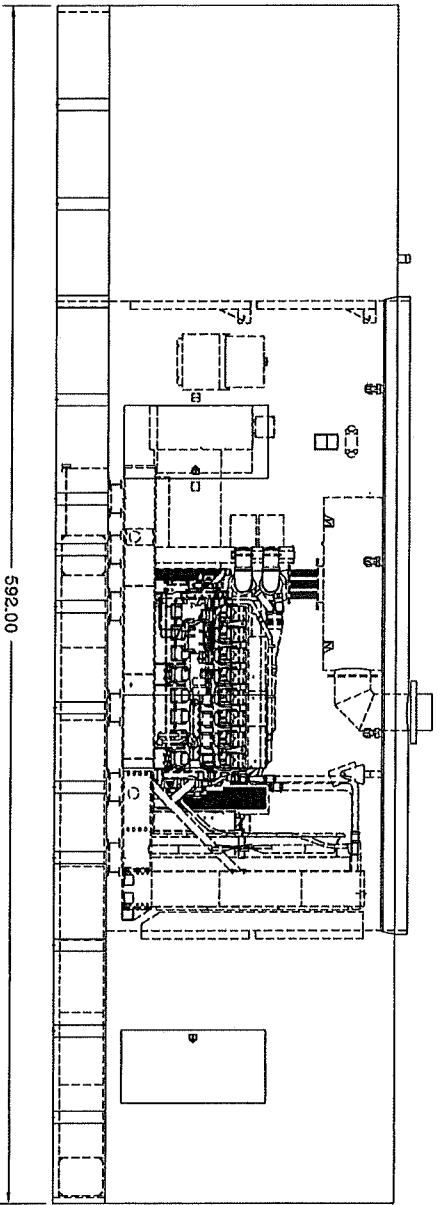

RIGHT SIDE VIEW

WEIGHT
 SUBBASE TANK - 29000 lbs
 ENCLOSURE - 20000 lbs
 GENERATOR - 36000 lbs

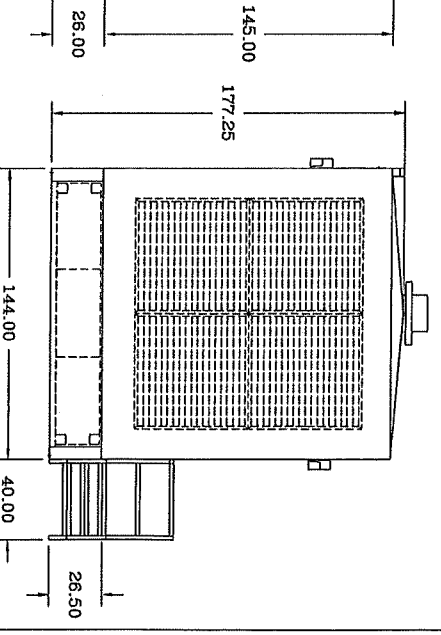

RADIATOR END VIEW

AUTHORIZATION <i>[Signature]</i>		GENERATOR MODEL NUMBER	2000 RECZMB	SUBBASE CAPACITY	3800 GALLONS	COMPANY:	BUCKETE POWER SALES
COLOR:	<i>Black</i>	UNIT DWG #	ADV-7299	WEIGHT:	SEE DWG	JOB NAME:	CBG
		QUOTE NO.:	010609-F-R3			QUOTE NO.:	010609-F-R3
NO.	REVISION	DATE	DWG NO.	10609F	SHEET	2	OF 2

COM-FAB, INC.
 PLAIN CITY, OH

DATE: 6-17-98
 SCALE: NTS
 TITLE: SUBBASE & ENCLOSURE